

MODEL - Summary of Quantities [Sheet]
FILE NAME - c:\pw\work\tdot\illinois.gov\dakota.kincaid\088184\ID74B61.sht-SQ.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	80% FED 20% STATE	
				ROADWAY 0005/STBG	ROADWAY 0005/NHPP
				URBAN	URBAN
40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	12055	8652	3403
40600370	LONGITUDINAL JOINT SEALANT	FOOT	10028	7124	2904
40600990	TEMPORARY RAMP	SQ YD	261	135	126
40603219	POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-9.5FG, N90	TON	1706	1212	494
40604164	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "D", N90	TON	1949	1384	565
44000164	HOT-MIX ASPHALT SURFACE REMOVAL, 3 3/4"	SQ YD	18303	13060	5243
44201839	CLASS D PATCHES, TYPE II, 16 INCH	SQ YD	415	350	65
44201843	CLASS D PATCHES, TYPE III, 16 INCH	SQ YD	40	40	0
48102100	AGGREGATE WEDGE SHOULDER, TYPE B	TON	102	102	0
48203100	HOT- MIX ASPHALT SHOULDERS	TON	32	32	0
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	3	2.07	0.93
67100100	MOBILIZATION	L SUM	1	0.7	0.3
70102632	TRAFFIC CONTROL AND PROTECTION, STANDARD 701602	L SUM	1	0.7	0.3
70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	1	0.7	0.3
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	28	19	9
70300100	SHORT TERM PAVEMENT MARKING	FOOT	6173	4564	1609
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	2301	1764	537
70300211	TEMPORARY PAVEMENT MARKING LETTERS AND SYMBOLS - PAINT	SQ FT	454	266	188

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	80% FED 20% STATE	
				ROADWAY 0005/STBG	ROADWAY 0005/NHPP
				URBAN	URBAN
70300221	TEMPORARY PAVEMENT MARKING - LINE 4"- PAINT	FOOT	6338	4780	1558
70300241	TEMPORARY PAVEMENT MARKING - LINE 6"- PAINT	FOOT	3490	1354	2136
70300261	TEMPORARY PAVEMENT MARKING - LINE 12"- PAINT	FOOT	195	161	34
70300281	TEMPORARY PAVEMENT MARKING - LINE 24"- PAINT	FOOT	342	283	59
* 78004620	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D- STANDARD- LINE 4"	FOOT	6338	4780	1558
* 78004630	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D- STANDARD- LINE 6"	FOOT	1904	1172	732
* 78004660	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D- STANDARD- LINE 12"	FOOT	195	161	34
* 78009000	MODIFIED URETHANE PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	454	266	188
* 78009006	MODIFIED URETHANE PAVEMENT MARKING - LINE 6"	FOOT	1586	1547	39
* 78009024	MODIFIED URETHANE PAVEMENT MARKING - LINE 24"	FOOT	342	303	39
* 78011025	GROOVING FOR RECESSED PAVEMENT MARKING 5"	FOOT	6338	4780	1558
* 78011035	GROOVING FOR RECESSED PAVEMENT MARKING 7"	FOOT	1904	1172	732
* 78011065	GROOVING FOR RECESSED PAVEMENT MARKING 13"	FOOT	195	161	34
* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	227	162	65
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	227	162	65
* 88600100	DETECTOR LOOP, TYPE I	EACH	2624	1702	922
X4060995	TEMPORARY RAMP (SPECIAL)	SQ YD	629	324	305

* SPECIALTY ITEM

△ REVISED 1-6-2026

USER NAME = dakota.kincaid	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 10/2/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES


SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.P RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
774	(107Z) RS-4	EFFINGHAM	24	3
CONTRACT NO. 74B61				
ILLINOIS FED. AID PROJECT				

PROPOSED CROSS SECTION

ILL ROUTE 33

STA: 211+15.77 TO STA: 212+25.77
STA: 1039+00 TO STA: 1037+85
STA EQUATION: 212+25.77=1039+00

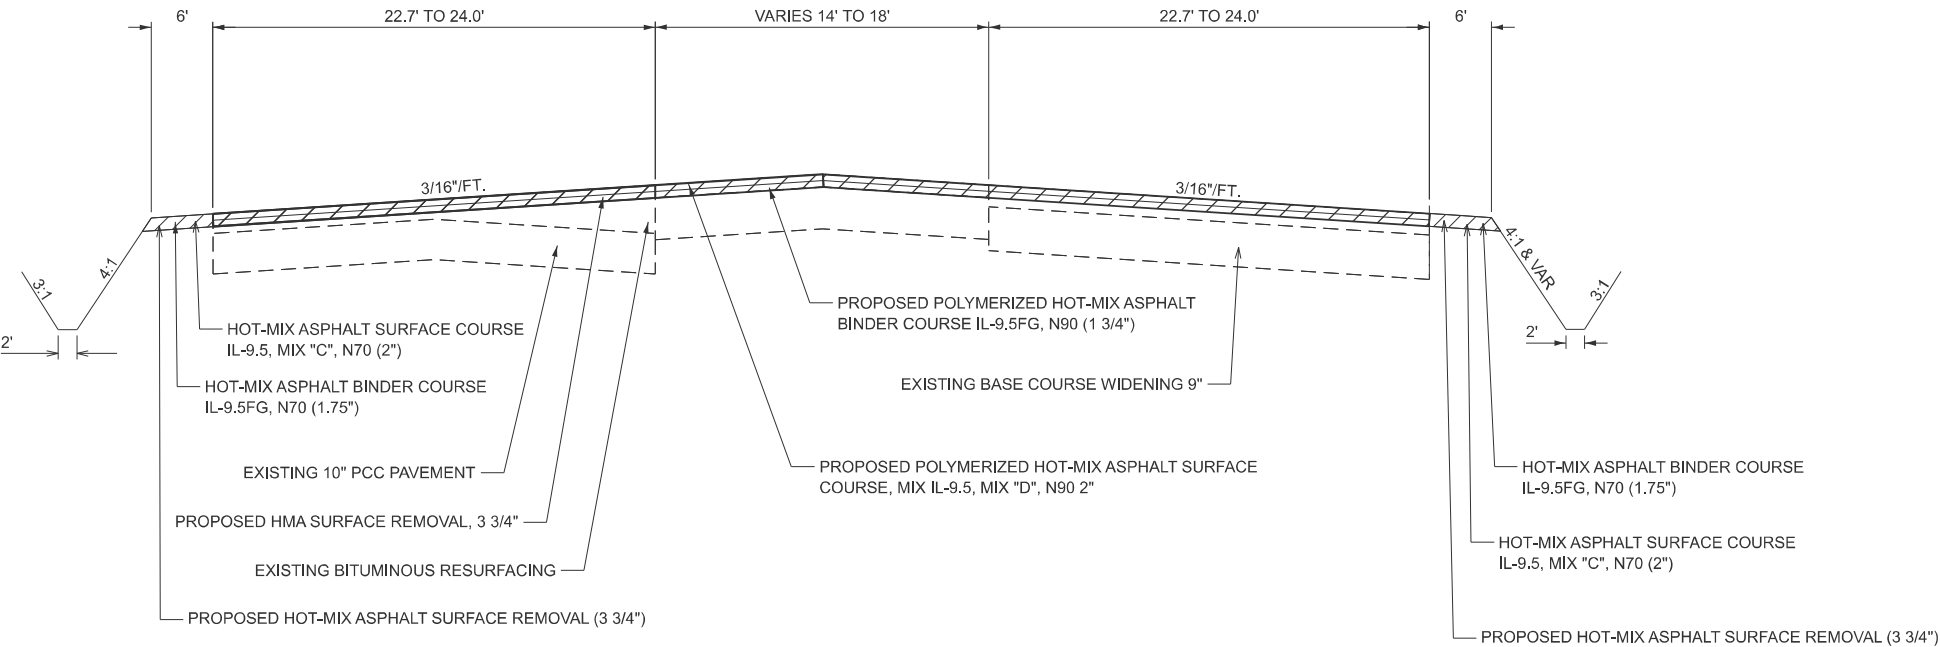

1 REVISD SHEET 1-6-2026

MODEL: Typical 3 (Sheet)
FILE NAME: c:\p\work\jw\illinois\effingham\k41086184\D714B61-sht-typical3.dgn

	USER NAME = Mona.Steffen	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL CROSS SECTION			F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					774	(107Z) RS-4	EFFINGHAM	24	6
		CHECKED -	REVISED -					CONTRACT NO. 74B61				
	PLOT DATE = 1/2/2026	DATE -	REVISED -		SCALE:	SHEET 3	OF 3	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: Schedule of Quantities (Sheet)
FILE NAME: c:\paw_work\paw\illinois.gov_dakota.kincald@illinois.gov_dakota.kincald\74B61-sht-schedule.dgn

⚠️ REVISED SHEET 1-6-2026

PAVING SCHEDULE																
STATION TO STATION			LENGTH	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "D", N90 (2")	POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL- 9.5FG, N 90 (1.75")	HOT-MIX ASPHALT SURFACE REMOVAL (3.75")	BITUMINOUS MATERIALS (TACK COAT)	TEMPORARY RAMPS (BEFORE BINDER)	TEMPORARY RAMPS (AFTER BINDER)	TEMPORARY RAMPS SPECIAL (SBL)	TEMPORARY RAMPS SPECIAL (NBL)	LONGITUDINA L JOINT SEALANT	HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "C", N70 (2")	HOT-MIX ASPHALT BINDER COURSE, IL- 9.5FG, N70 (1.75")	AGGREGATE WEDGE SHOULDER TYPE B (1")	HOT-MIX ASPHALT SURFACE REMOVAL (3.75") (SHOULDER)
			FOOT	TON	TON	SQ YD	POUND	SQ YD	SQ YD	SQ YD	SQ YD	FOOT	TON	TON	TON	SQ YD
188+34	TO	204+50	1616	1257	1100	11671	7878	86	40	208	276	6464	0	0	0	0
204+50	TO	210+20	570	443	388	3958	2672	0	0	54	91	2280	0	0	0	0
210+20	TO	212+25.77	206	160	140	1579	966	0	0	0	0	824	8	8	51	72
212+25.77	TO	1039+00	STATION EQUATION													
1039+00	TO	1037+85	115	89	78	947	539	92	43	0	0	460	8	8	51	76
		TOTAL	2507	1949	1706	18155	12055	178	83	262	367	10028	16	16	102	148

AGGREGATE WEDGE SHOULDER TYPE B (RIGHT SIDE)							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH (INCHES)	CU YD	TONS
211+15.89	TO	212+25.77	109	3	0-1	12	25
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	3	0-1	13	26
		TOTAL	224			25	51

AGGREGATE WEDGE SHOULDER TYPE B (LEFT SIDE)							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH (INCHES)	CU YD	TONS
211+18.77	TO	212+25.77	107	3	0-1	12	24
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	3	0-1	13	26
		TOTAL	222			25	51

ASPHALT SHOULDER SURFACE COURSE (2") RIGHT SIDE							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH	SQ YD	TONS
211+15.89	TO	212+25.77	109	0-6	2	36	4
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	0-6	2	38	4
		TOTAL	224			74	8

ASPHALT SHOULDER SURFACE COURSE (2") LEFT SIDE							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH	SQ YD	TONS
211+18.77	TO	212+25.77	107	0-6	2	36	4
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	0-6	2	38	4
		TOTAL	222			74	8

ASPHALT SHOULDER BINDER COURSE (1.75") RIGHT SIDE							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH	SQ YD	TONS
211+15.89	TO	212+25.77	109	0-6	1.75	36	4
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	0-6	1.75	38	4
		TOTAL	224			74	8

ASPHALT SHOULDER BINDER COURSE (1.75") LEFT SIDE							
STATION	TO	STATION	LENGTH	WIDTH (FEET)	DEPTH	SQ YD	TONS
211+18.77	TO	212+25.77	107	0-6	1.75	36	4
212+25.77	TO	1039+00	STATION EQUATION				
1039+00	TO	1037+85	115	0-6	1.75	38	4
		TOTAL	222			74	8

	USER NAME = dakota.kincald	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES			F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					774	(107Z) RS-4	EFFINGHAM	24	7
		CHECKED -	REVISED -		SCALE:			CONTRACT NO. 74B61				
	PLOT DATE = 1/2/2026	DATE -	REVISED -		SHEET 1	OF 2	SHEETS	STA.	TO STA.	ILLINOIS	FED. AID PROJECT	