

### CONTROLLER SEQUENCE

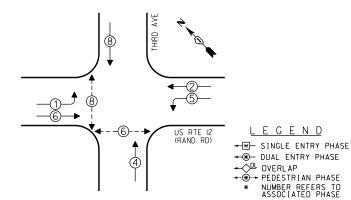

PHASE DESIGNATION DIAGRAM

EMERGENCY VEHICLE PREEMPTION SEQUENCE



| EMERGENCY<br>VEHICLE PREEMP |          | 6          |
|-----------------------------|----------|------------|
| EMERGENCY VEHICLE PREEMPTOR | 3        | 4          |
| MOVEMENT                    | <b>=</b> | <b>↓</b> ↑ |

| I.D.O.T.<br>TRAFFIC SIGNAL INSTALLATION<br>ELECTRICAL SERVICE REQUIREMENTS |        |         |        |       | TOTAL        |        |
|--|--------|---------|--------|-------|--------------|--------|
|  |        | WATTAGE |        |       | WATTAGE      |        |
| TYPE   | NO. OF | LAMPS   | INCAND | LED > | % OPERATIONS |        |
| SIGNAL (RED)   |        | 12      |        | 17    | 0.50         | 102.00 |
| (YELLOW)   |        | 12      |        | 25    | 0.25         | 75.00  |
| (GREEN)  |        | 12      |        | 15    | 0.25         | 45.00  |
| ARROW  |        | 8       |        | 12    | 0.10         | 9.60   |
| PED. SIGNAL  |        | 4       |        | 25    | 1.00         | 100.00 |
| CONTROLLER   |        | 1       |        | 100   | 1.00         | 100.00 |
| ILLUM. SIGN  |        |         |        | 25    | 0.05         |        |
| LUMINAIRE  |        |         | 250    |       | 0.50         |        |
| VIDEO SYSTEM   |        |         | 150    |       | 1.00         |        |
|  |        |         |        |       |              |        |
| FLASHER  |        |         |        |       | 0.50         |        |
| ENERGY COSTS TO: TOTAL = 431.60  |        |         |        |       |              |        |
| WILLACE OF Dee Blaine  |        |         |        |       |              |        |

VILLAGE OF Des Plaines 1420 Miner Street Des Plaines, ILLINOIS 60016

ENERGY SUPPLY - CONTACT: \_\_\_\_ PHONE: COMPANY: \_\_\_

Dave Schacht (630) 437-2129

| DESIGNED | - | JAM      | REVISED - |  |
|----------|---|----------|-----------|--|
| DRAWN    | - | JAM      | REVISED - |  |
| CHECKED  | - | LMM      | REVISED - |  |
| DATE     | - | 10-14-13 | REVISED - |  |
|          |   |          |           |  |

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

SCHEDULE OF QUANTITIES, CABLE PLAN, PHASE DESIGNATION DIAGRAM, AND EMERGENCY VEHICLE PREEMPTION SEQUENCE, US RTE 12 (RAND ROAD) AT THIRD AVE OF SHEETS STA. SHEET

(C)

SECTION COUNTY COOK 99 22 VAR 2013-054TS CONTRACT NO. 60X15

US RTE 12 (RAND ROAD) -3**\***20 TRACER CABLE (C) \( \text{\infty} INTERCONNECT TO -CABLE PLAN

## TRACER CABLE **3**C - INTERCONNECT TO ILL RT 58 (GOLF RD) THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "ECONOLITE".

### REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT

# THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND SHALL BE DISPOSED OF BY THEM OUTSIDE THE RIGHT-OF-WAY AT THEIR EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACT BID PRICE.

### QUANTITY UNIT DESCRIPTION

4 EACH PEDESTRIAN PUSHBUTTON

### SCHEDULE OF QUANTITIES

| DUAN. | UNIT | ITEM |
|-------|------|------|
|       |      |      |

EACH MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
EACH PEDESTRIAN PUSH-BUTTON
EACH MODIFY EXISTING CONTROLLER CABINET
EACH REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
EACH UNINTERRUPTIBLE POWER SUPPLY, SPECIAL

SAM SCHWARTZ ENGINEERING 3100 W. HIGGINS, STE. 100, HOFFMAN ESTATES, IL 60169