


CONTRACT #68740

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
619	120BR,CR	PUTNAM	77	17
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

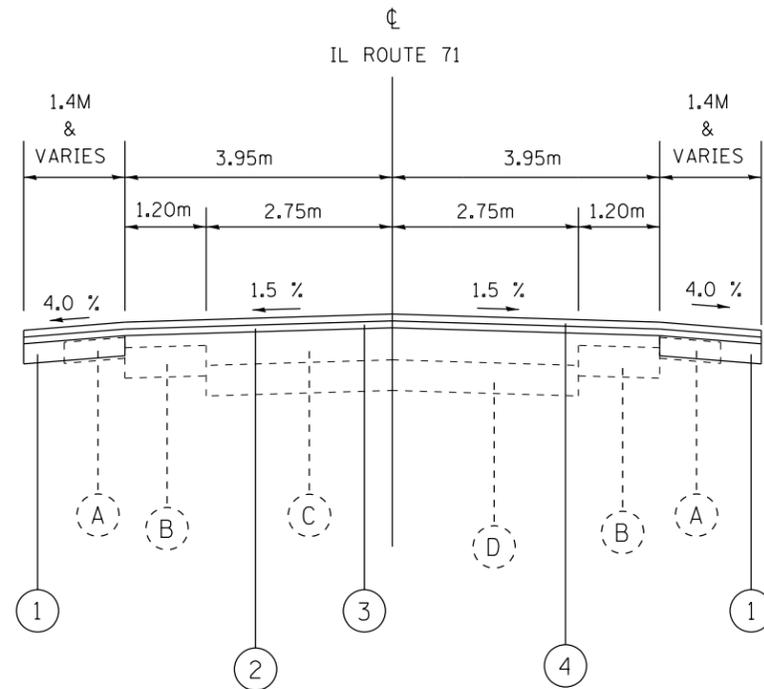

PROPOSED TYPICAL SECTION NO. 2

STA. 12+476 TO STA. 12+600

EXISTING

- (A) EXISTING AGGREGATE SHOULDER
- (B) EXISTING HMA WIDENING, 225mm
- (C) EXISTING HMA OVERLAY, 225mm AND VARIES
- (D) EXISTING PCC PAVEMENT, 225mm-150mm-225mm

PROPOSED

- (1) PROPOSED HMA BASE COURSE WIDENING, 200MM
- (2) PROPOSED HMA SURFACE REMOVAL, VARIABLE
- (3) PROPOSED LEVELING BINDER (MACHINE METHOD), N50 (3/4" AND VARIES)
- (4) PROPOSED HMA SURFACE COURSE, MIX "D", N50

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
		<p>TYPICAL SECTIONS</p> <p>DRAWN BY _____</p> <p>CHECKED BY _____</p> <p>DATE _____</p>