


SECTION A-A

Note:
The area below the box and apron shall be over excavated by 6 inches and filled with CA-7 or CA-11 to provide a level platform. Cost included with Concrete Box Culverts.

- SEQUENCE OF CONSTRUCTION**
1. Remove existing culvert.
 2. Removal of rock for bottom slab and toewall of culvert.
 3. Construct proposed culvert.
 4. Place Granular Culvert Backfill.
 5. Pave roadway

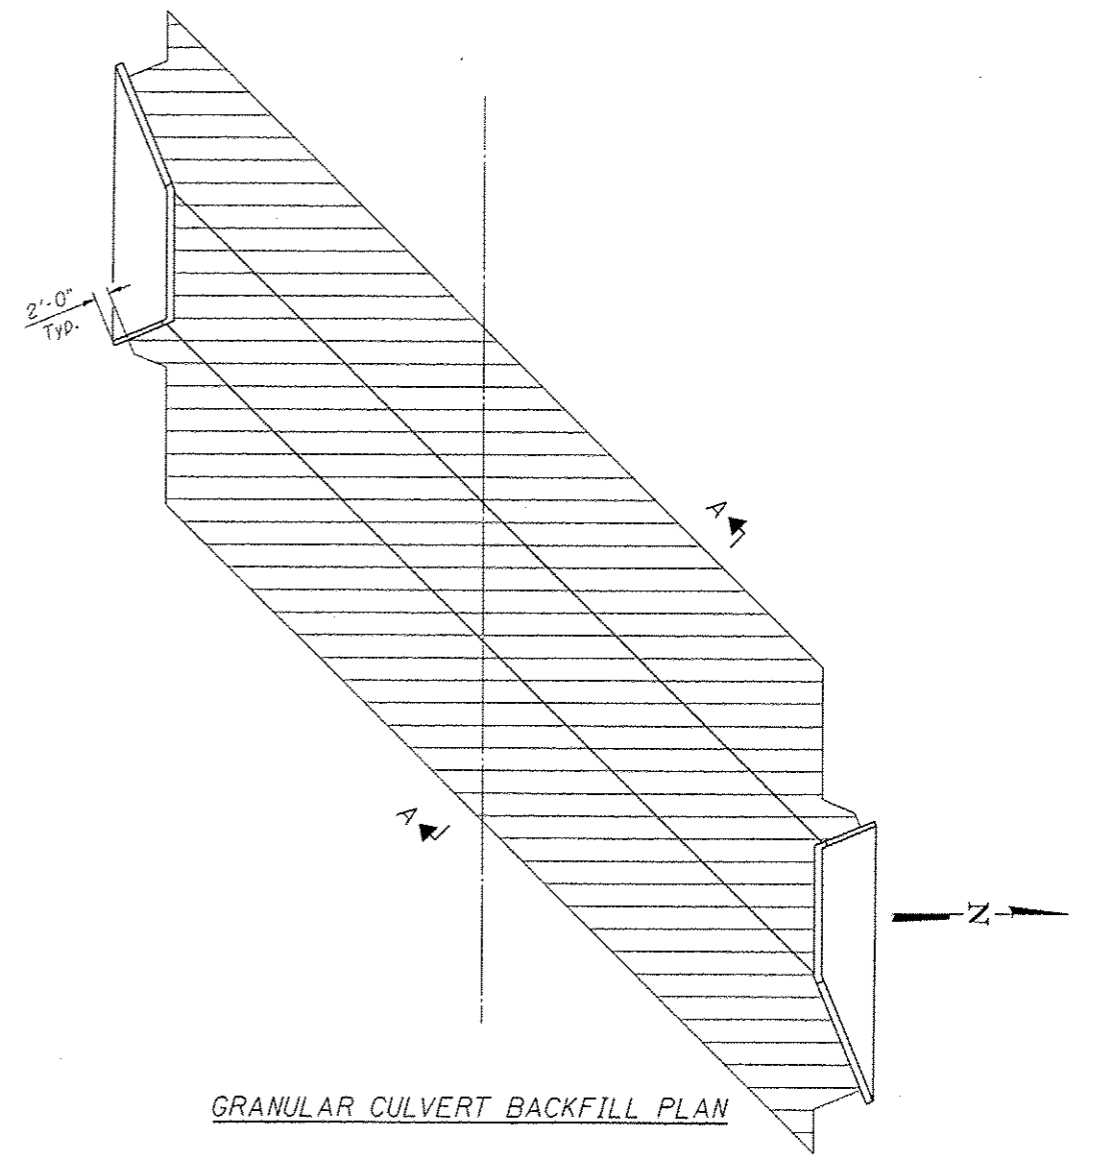

GRANULAR CULVERT BACKFILL PLAN

REVISOR'S MARK (triangle with 'A') REVISED SHEET 12-27-13

FILE NAME	USER NAME	DESIGNED RJP	REVISOR	DATE	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL DATA STRUCTURE NUMBER 001-7130	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		CHECKED ADL	REVISOR	SEB 10-25-13			63	(1)CR-1, (2)CR	ADAMS	43	23	
PLOT SCALE		DRAWN RJP	REVISOR				CONTRACT NO. 72C12					
PLOT DATE		CHECKED ADL	REVISOR				ILLINOIS FED. AID PROJECT Klingner & Associates P.C.					
SHEET NO. 2 OF 6 SHEETS												