
SEEDING & MULCHING

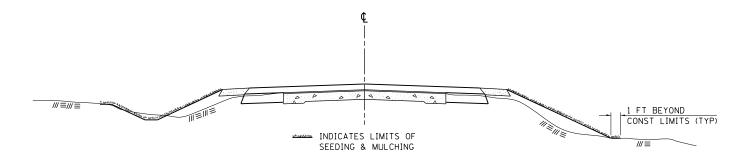

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CON-STRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.


FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIME-STONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

	REVISIONS			
	REDRAWN	2-15-89		
	REVISED	8-15-94		
	REVISED	6-3-99		
STD. 9-12	REVISED	3-27-08		

TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

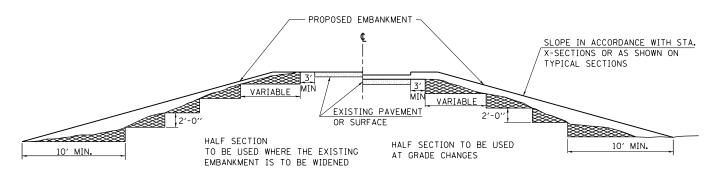

MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.

										REVISIONS
										REVISIONS REDRAWN 2-15-89
										REVISED 8-15-94
										CHECKED 6-3-99
									STD.	9-16 RESIZED 5-7-08
FILE NAME =	USER NAME = deterdinggj	DESIGNED -	REVISED -					F.A.S. RTF.	SECTION	COUNTY TOTAL SHEET SHEETS NO.
c:\pw_work\pwidot\deterdinggj\d0334983\	8354-039-sht-pln.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS	DISTRICT STANDARDS			1911	10B-1	JACKSON 19 14
	PLOT SCALE = 100.0000 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION						CONTRACT NO. 78385
Default	PLOT DATE = 10/16/2013	DATE -	REVISED -		SCALE: SHEET	OF SHEETS STA.	TO STA.		TILINOIS EED AT	