


| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|-----------------------|----------|----------|------------------|-----------|
| 353 | 11-5-N-1 | COOK | 79 | 9 |
| STA. | | TO STA. | | |
| FED. ROAD DIST. NO. 1 | | ILLINOIS | FED. AID PROJECT | |


LEGEND

- ① EXIST. HMA PAVEMENT, 3''(±)
- ①A EXIST. HMA PAVEMENT, 1''(±)
- ② EXIST. P.C.C. BASE COURSE, 10''(±)
- ②A EXIST. HMA BASE COURSE, 10''(±)
- ③ EXIST. P.C.C. SURFACE
- ④ EXIST. SUBBASE GRANULAR MATERIAL, 4''(±)
- ⑤ EXIST. B-6.24 CURB & GUTTER (TO BE REMOVED)
- ⑤A EXIST. SIDEWALK
- ⑥ EXIST. HMA SHOULDER
- ⑦ EXIST. AGGREGATE SHOULDER
- ⑧ EXIST. RAISED/CORRUGATED P.C.C. MEDIAN
- ⑨ EXIST. / PROP. GROUND (SEE CROSS SECTIONS)
- ⑩ PROP. HMA SURFACE REMOVAL, 1''
- ⑪ PROP. POLYMERIZED HMA SURFACE COURSE, MIX "F", N90, 1 3/4''
- ⑫ PROP. LEVELING BINDER (MM), N70, 1 3/4''
- ⑬ PROP. POLYMERIZED LEVELING BINDER (MM), N50, IL-4.75, 3/4''
- ⑭ PROP. WIDENING: P.C.C. BASE COURSE, 10''
- ⑭A PROP. AGGREGATE SUBGRADE, 12''
- ⑮ PROP. SUBBASE GRAN. MATERIAL, TYPE B, 4''
- ⑮A PROP. SUBBASE GRAN. MATERIAL, TYPE C, 4''
- ⑯ PROP. B-6.24 CURB & GUTTER
- ⑰ PROP. HMA SHOULDER, 8''
- ⑱ PROP. AGGREGATE SHOULDER, TYPE B, 6''
- ⑲ PROP. SIDEWALK, 5''
- ⑳ PROP. DRILL AND GROUT #8 TIE BAR, 24'' LONG. (24'' C-C). COST INCLUDED IN PCC BASE COURSE
- ㉑ PROP. DRILL AND GROUT #6 TIE BAR, 24'' LONG. (24'' C-C). COST INCLUDED IN PROP. CURB & GUTTER

 PAVEMENT/MEDIAN REMOVAL

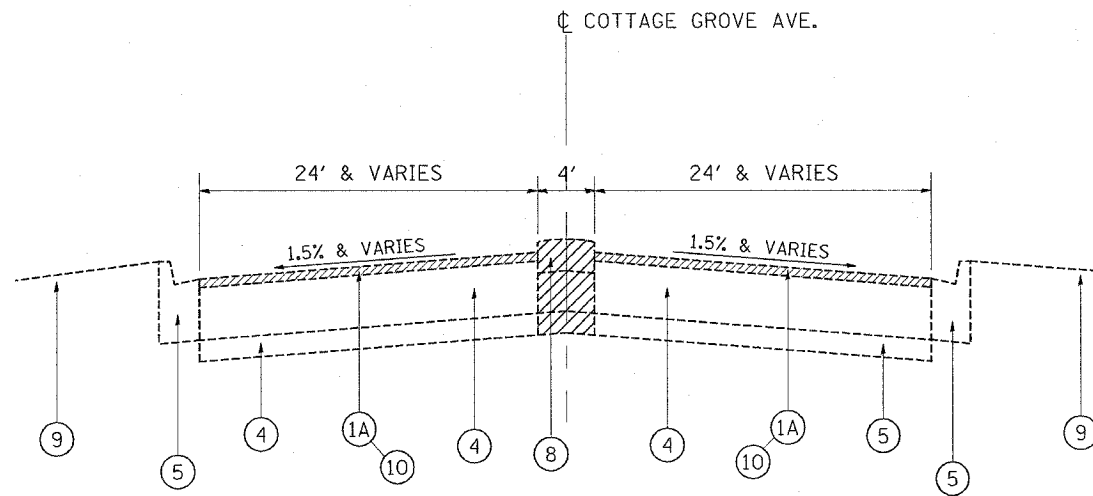

EXISTING TYPICAL SECTION
COTTAGE GROVE AVE.
STA. 113+80 TO 116+20

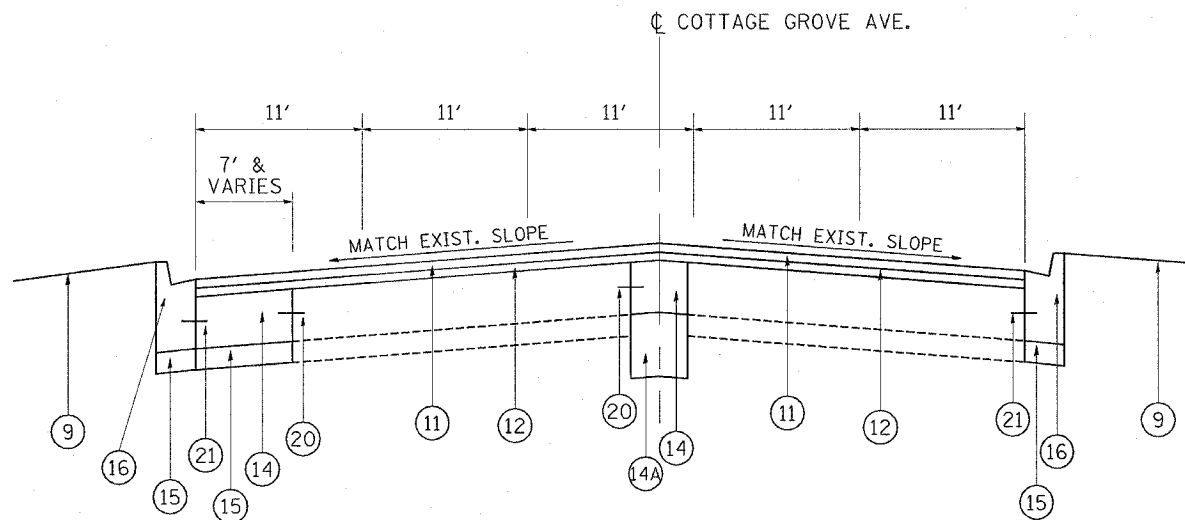

PROPOSED TYPICAL SECTION
COTTAGE GROVE AVE.
STA. 113+80 TO 116+20

NOTES:

CLASS C PATCHES TO BE PLACED ON COTTAGE GROVE AVE.

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING AND PROPOSED
TYPICAL SECTIONS
COTTAGE GROVE AVE. AT US 30

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY

REV. 1