CONTRACT NO. 66600

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	(50-5) HBK-2	LASALLE	331	158
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		



QUANTITY
12" LINE = 16 LIN. FT.
OR 4" LINE = 48 LIN. FT.



QUANTITY
12" LINE = 29 LIN. FT.
OR 4" LINE = 87 LIN. FT.

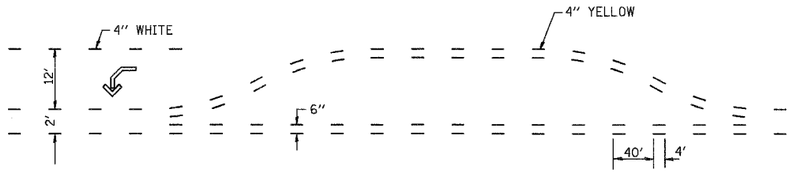

SHORT-TERM PAVEMENT MARKING FOR MEDIANS AND ARROWS

703-1

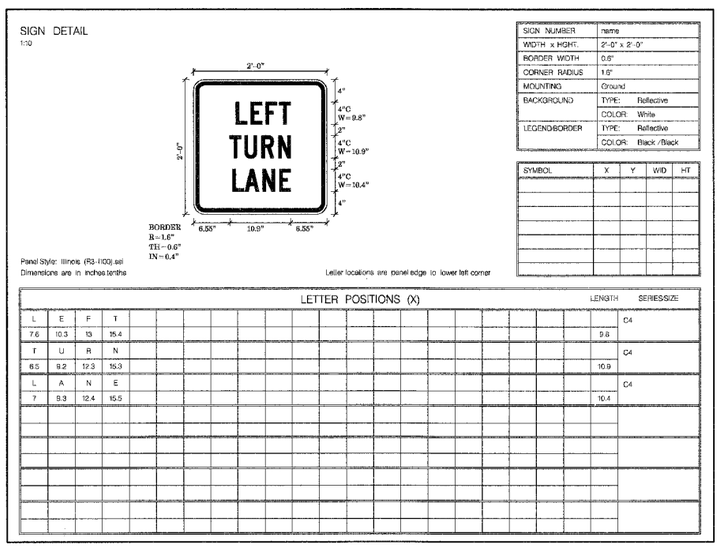

SIGN NUMBER	Name
WIDTH x HGHT.	2'-0" x 2'-0"
BORDER WIDTH	0.6"
CORNER RADIUS	1.6"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: White
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black / Black

SYMBOL	X	Y	WID	HT

LETTER POSITIONS (X)

																						LENGTH	SERIES/SIZE
L	E	F	T																				C4
7.6	10.3	13	15.4																			9.8	
T	U	R	N																				C4
6.5	9.2	12.3	15.3																			10.9	
L	A	N	E																				C4
7	9.3	12.4	15.5																			10.4	

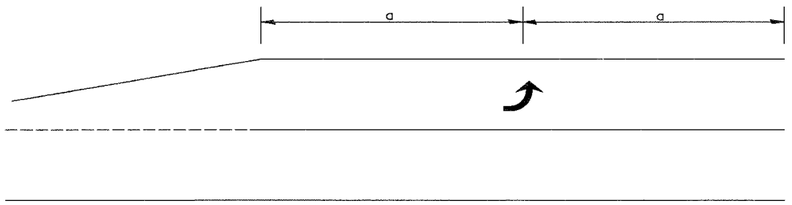

99' AND UNDER

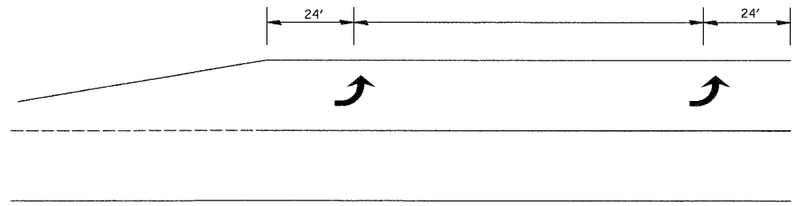

100' TO 149'

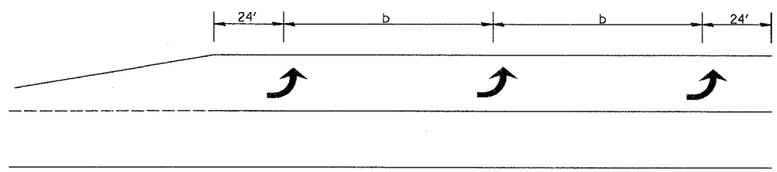

150' AND LONGER

TYPICAL PLACEMENT OF ARROWS
IN TURN LANES

780-10

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING DETAILS

SCALE: NONE
DATE: 11/16/07

DRAWN BY: KM
CHECKED BY: SE

Baker Engineering, Inc.

H:\107496\3.0 deliverables\3.2 roadway\Design\Sheets\180_DET02.dgt
11/19/2007