
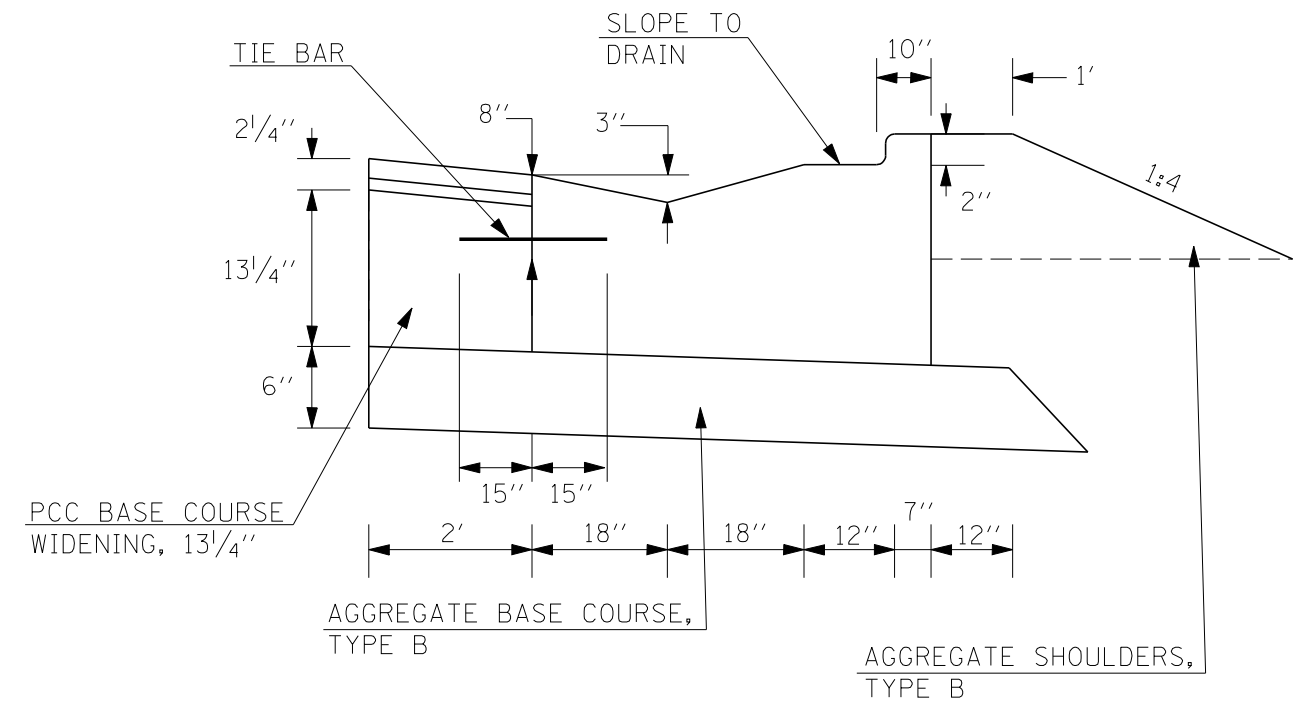



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
840	(121,122)RS-3	VERMILION	89	50
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

DETAIL OF GUTTER OUTLET, SPECIAL

SECTION A-A

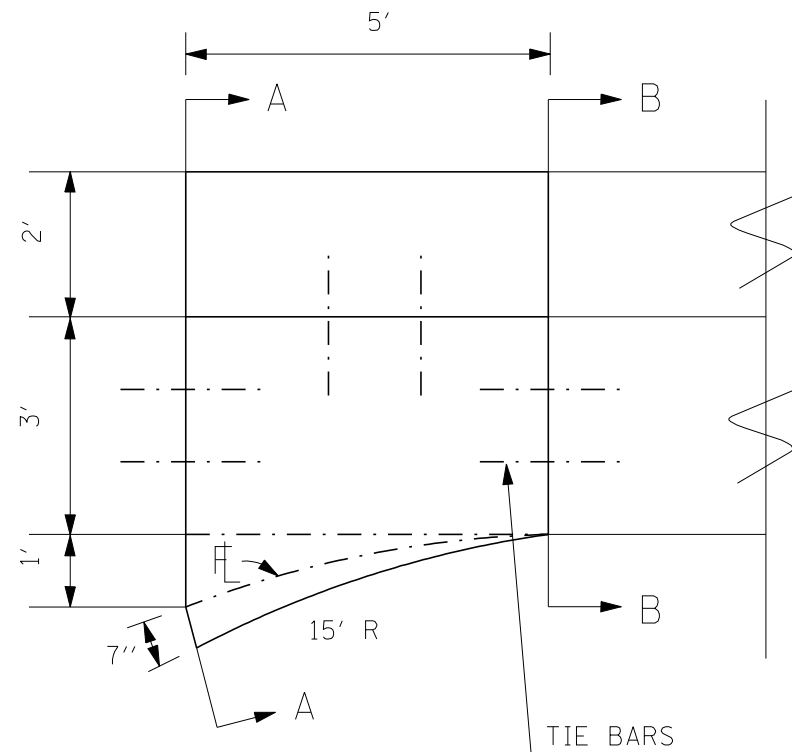

SECTION B-B

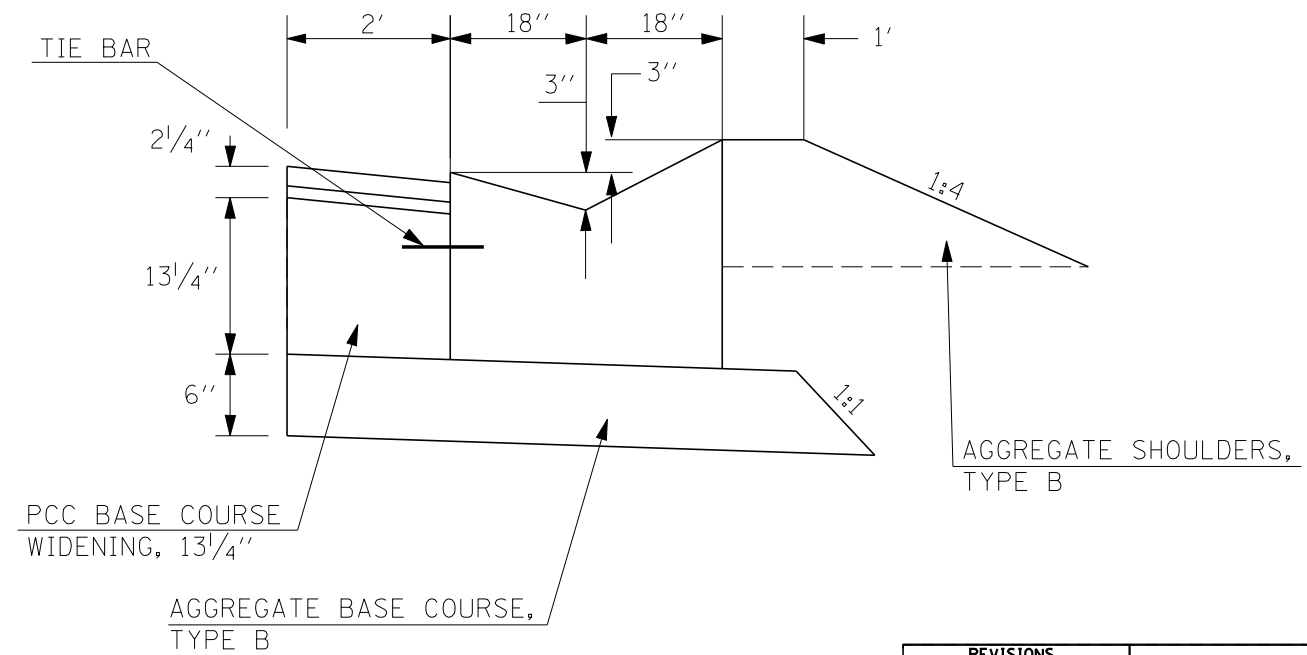

GENERAL NOTES

- ① Class SI Concrete shall be used throughout.
- ② Tie Bars shall be No. 6 (No. 20) at 24" (600 mm) centers unless otherwise shown. Special inlets and outlets shall be tied to the pavement in accordance with details for longitudinal construction joint shown on standard 420001.
- ③ Tie Bars shown above will not be paid for separately but shall be considered as incidental to Gutter Outlet, Special.
- ④ Aggregate Base Course, Type B will not be paid for separately but shall be considered incidental to Gutter Outlet, Special.
- ⑤ When special inlet is constructed adjacent to flexible pavement, the tie bars shall be omitted and all construction joints shall be provided with a dowel bar conforming to article 1006.11(b).
- ⑥ This work will be paid for at the contract unit price per Cu.Yd. (m3) for Class SI Concrete (Outlet) which price shall include all labor and material as specified and no additional compensation will be allowed.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

CONCRETE GUTTER RECONSTRUCTION DETAIL

SCALE: VERT. / HORIZ. / DATE

DRAWN BY / CHECKED BY

PLOT DATE = 11/15/2007
 FILE NAME = c:\projects\4595800 (v8)\rev.plamhats.dgn
 PLOT SCALE = 42.3525' / IN.
 USER NAME = collierb