


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
9296	65BR	MONROE	22	16
STA.		TO STA.		
FED. ROAD DIST. NO. 8 ILLINOIS FED. AID PROJECT				

CONTRACT NO. 76387

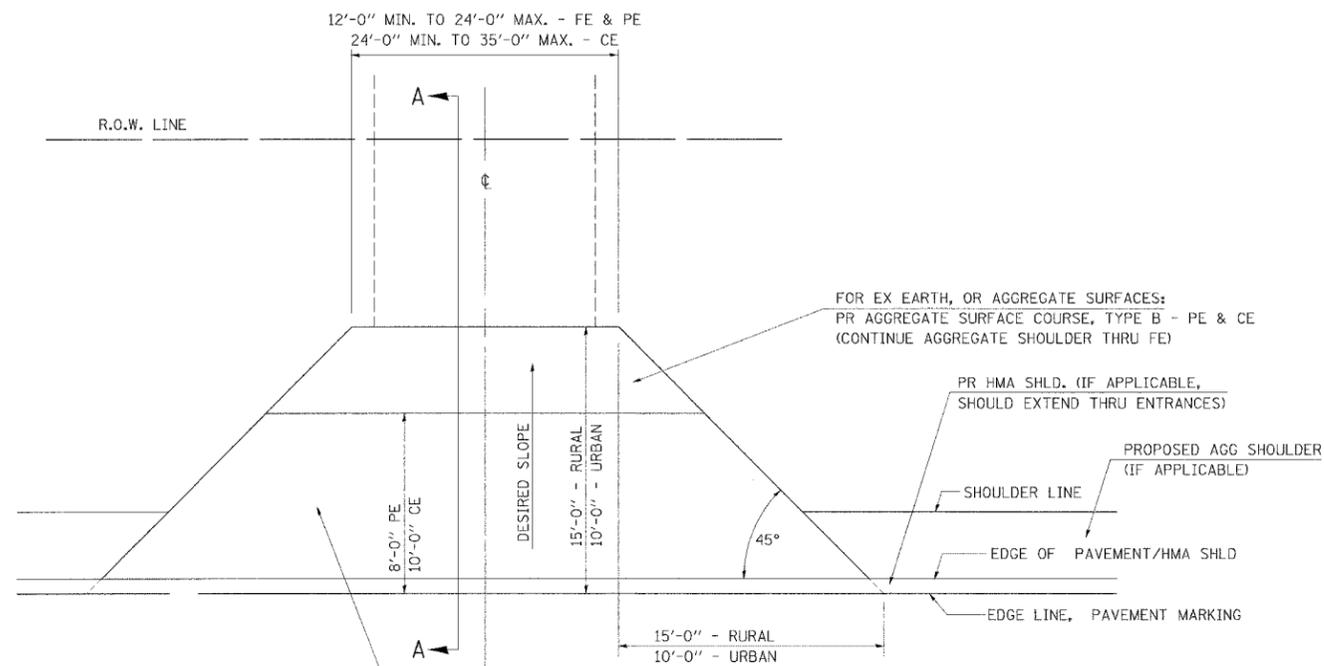

FOR EX EARTH OR AGGREGATE SURFACES:
 PR HMA SURFACE REMOVAL (IF APPLICABLE)
 PR AGGREGATE SHOULDER THRU - FE
 PR HMA SURFACE 3/2" - PE
 PR HMA SURFACE 8" - CE

FOR EX HOT-MIX ASPHALT SURFACES:
 PR HOT-MIX ASPHALT SURFACE REMOVAL-BUTT JOINT

FOR EX PCC SURFACES:
 PR PCC SURFACE REMOVAL-BUTT JOINT

FOR EX EARTH, OR AGGREGATE SURFACES:
 PR AGGREGATE SURFACE COURSE, TYPE B - PE & CE
 (CONTINUE AGGREGATE SHOULDER THRU FE)


PR HMA SHLD. (IF APPLICABLE,
 SHOULD EXTEND THRU ENTRANCES)

PROPOSED AGG SHOULDER
 (IF APPLICABLE)


SHOULDER LINE

EDGE OF PAVEMENT/HMA SHLD

EDGE LINE, PAVEMENT MARKING

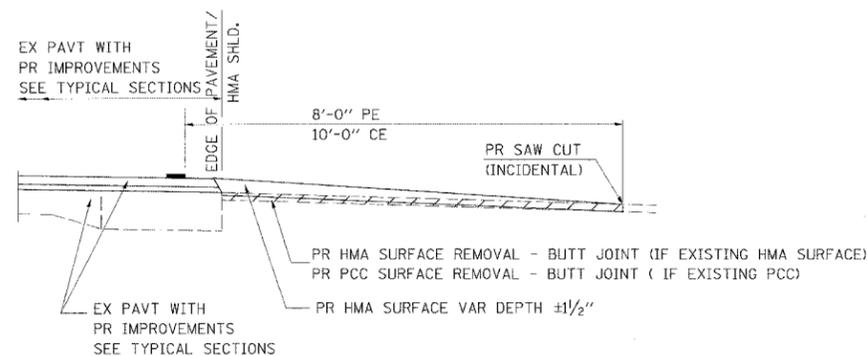

SECTION A-A FOR EX HOT-MIX ASPHALT/ PC CONCRETE PE, CE & SIDE ROAD

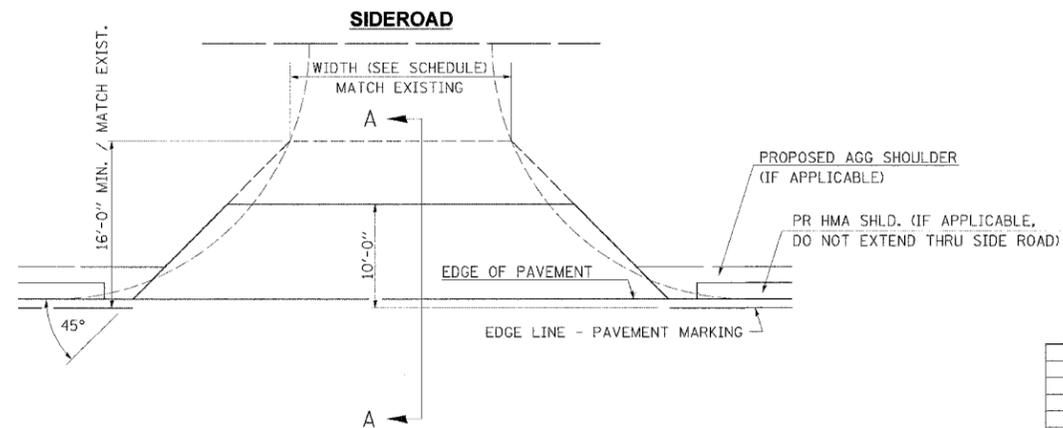

NOTE : IF HMA SHLDS ARE PROPOSED THEY
 SHOULD NOT EXTEND THROUGH SIDEROADS

GENERAL NOTES:

THE RESIDENT ENGINEER WILL DETERMINE THE EXACT TYPE OF IMPROVEMENT TO BE COMPLETED FOR ALL ENTRANCES, SIDEROADS AND MAILBOX TURNOUTS ON THIS PROJECT.

THE PLAN DETAILS AND SCHEDULES SHOULD BE USED AS A GUIDE FOR THE ENGINEER TO IMPLEMENT THE FINAL DESIGN. THE ENGINEER MAY DECIDE TO SALVAGE PORTIONS OF THE EXISTING ENTRANCE PAVEMENT STRUCTURE; THEREFORE, REDUCING PAY ITEM QUANTITIES. NO ADDITIONAL PAYMENT WILL BE ALLOWED FOR THIS REDUCTION IN QUANTITIES.

ANY WORK THE ENGINEER REQUIRES WHICH IS NOT COVERED BY A PAY ITEM CONTAINED IN THE PLANS WILL BE PAID FOR ACCORDING TO ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.

HOT-MIX ASPHALT REQUIRED TO CONSTRUCT THE ENTRANCES SHALL BE ACCORDING TO THE APPLICABLE PORTIONS OF SECTION 406 AND 408 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER.

WHEN THE HOT-MIX ASPHALT PROPOSED FOR THE IMPROVEMENT IS THICKER THAN 75 mm (3 INCHES) AND REQUIRE PLACEMENT IN MORE THAN ONE LIFT. THE BOTTOM LIFT(S) SHALL MEET THE REQUIREMENTS OF HOT-MIX ASPHALT BASE COURSE IN SECTION 406 OF THE STANDARD SPECIFICATIONS AND THE TOP LIFT OF 50 mm (2 INCHES) SHALL MEET THE REQUIREMENTS OF HOT-MIX ASPHALT SURFACE COURSE.

THIS WORK WILL BE PAID FOR ACCORDING TO SECTIONS 351, 358, 408, 423 AND 440 OF THE STANDARD SPECIFICATIONS.

THE LENGTH OF THE IMPROVEMENTS MAY VARY, AS SHOWN ON THE PLANS, DUE TO CULVERT REMOVAL AND REPLACEMENT.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
 UNLESS OTHERWISE SHOWN.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
**DETAILS FOR RURAL / URBAN
 ENTRANCE, MAILBOX TURNOUT
 & SIDEROADS**

FAU ROUTE 9296
 SECTION 65BR
 MONROE COUNTY

SCALE: VERT.
 HORIZ. N.T.S.
 DATE: JANUARY 2007

DRAWN BY LLO
 CHECKED BY LEL

ENT PPP