



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1362	06-00047-00-LS	COOK	59	40
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

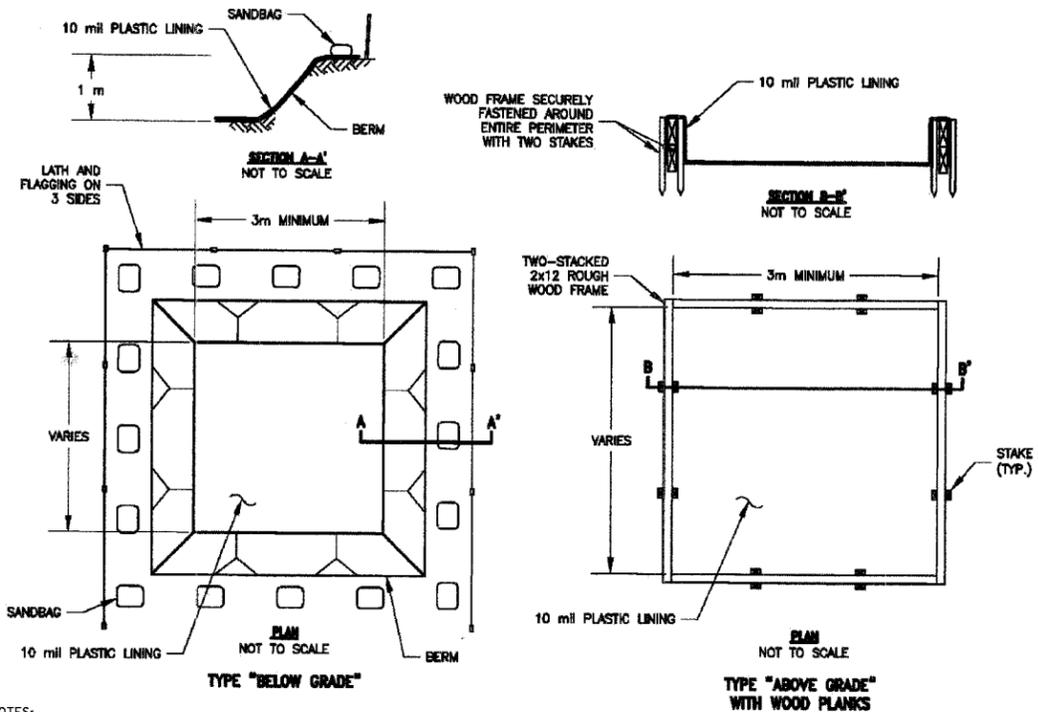


- NOTES:
- ACTUAL LAYOUT DETERMINED IN THE FIELD
 - THE CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN 10 m OF THE TEMPORARY CONCRETE WASHOUT FACILITY.

CONCRETE WASTE MANAGEMENT

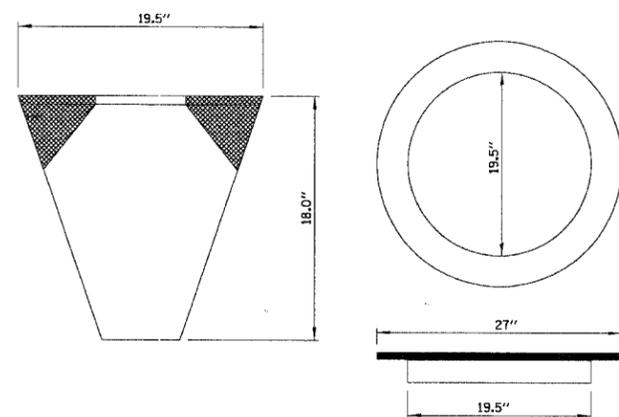

NOTE:
FRAME: FLANGE SHALL BE FABRICATED FROM 1/8" FLAT STACK. BASE RING SHALL BE FABRICATED FROM 1 1/2" X 1 1/2" X 1/8" CHANNEL. DOMESTIC STEEL CONFORMING TO ASTM-A36.
SEDIMENT BAG: SHALL BE FABRICATED FROM 4 OZ/SQ YD NON-WAVEN POLYPROPYLENE GEOTEXTILE AND SHALL BE REINFORCED WITH POLYESTER MESH. THE BAG SHALL BE SECURED TO THE BASE RING WITH STAINLESS STEEL STRAP AND LOCK.


CATCH BASIN AND INLET FILTER

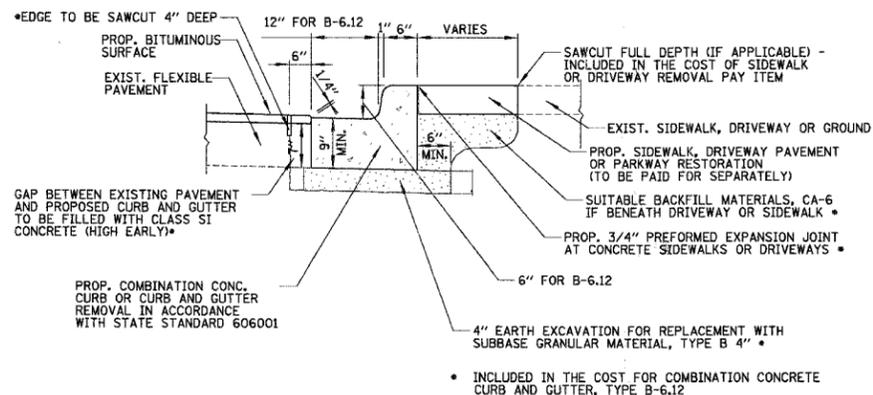

COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12


NOTE: LONGITUDINAL BARS, IF ENCOUNTERED IN THE EXISTING CURB OR CURB AND GUTTER, ARE NOT TO BE REPLACED. CUTTING AND REMOVING LONGITUDINAL BARS SHALL BE INCLUDED IN THE COST OF CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT.

P.C.C. SIDEWALK, 5 INCH SPECIAL DETAIL



* CROSS SLOPE 2% OR AS SHOWN ON CROSS SECTIONS


- NOTES:
- ALL REQUIRED EARTH EXCAVATION TO CONSTRUCT P.C.C. SIDEWALK SHALL BE INCIDENTAL TO THE P.C.C. SIDEWALK 5 INCH, SPECIAL.
 - THICKNESS SHALL BE INCREASED TO 6" WHERE SIDEWALK IS ADJACENT TO A CONCRETE DRIVEWAY. (COST INCIDENTAL).
 - IN LOCATIONS WHERE SIDEWALK IS REMOVED AND REPLACED THROUGH DRIVEWAYS, DRIVEWAYS SHALL BE SAWCUT AT THE LIMITS OF THE PROPOSED SIDEWALK.
 - WHEN FORMS ARE REMOVED FROM THE SIDEWALK EITHER THE SIDEWALK SHALL BE BARRICADED OR BACKFILLED WITHIN 24 HOURS.

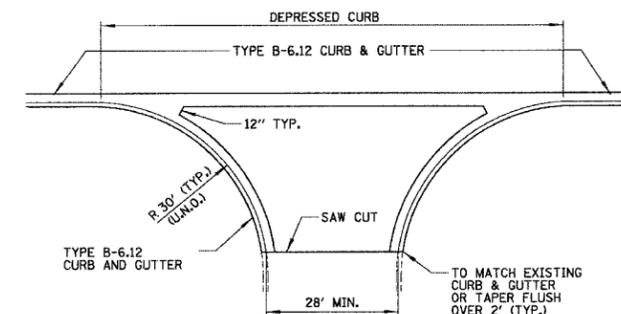

ASPHALT DRIVEWAY
HOT MIX ASPHALT SURFACE COURSE, MIX "C", N50-1 1/2"
HOT MIX ASPHALT BINDER COURSE, 1L-19.0, N50-2 1/4"
SUB-BASE GRANULAR MATERIAL, TYPE B, 4"

CONCRETE DRIVEWAY
PCC DRIVEWAY PAVEMENT, 9"
3" AGGREGATE BASE COURSE, TYPE B

TYPICAL COMMERCIAL DRIVEWAY

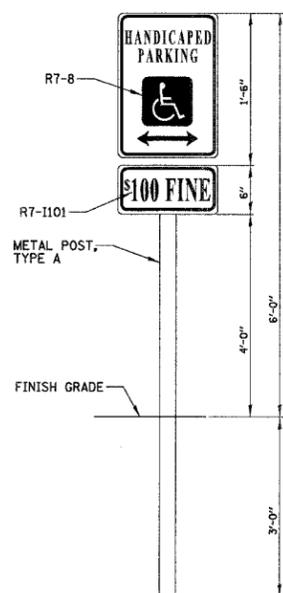


HANDICAPPED PARKING SIGN (R7-8) DETAIL

N.T.S.




"\$100 FINE" SIGN (R7-1101)

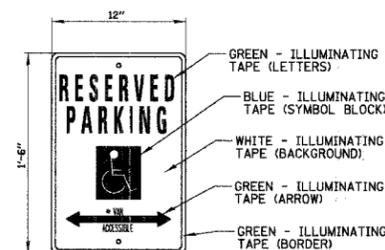

* "VAN ACCESSIBLE" TO BE NOTED FOR SPACES DESIGNATED FOR THAT USE.


HANDICAP PARKING SIGN (R7-8)

N.T.S.



HANDICAP SYMBOL

N.T.S.

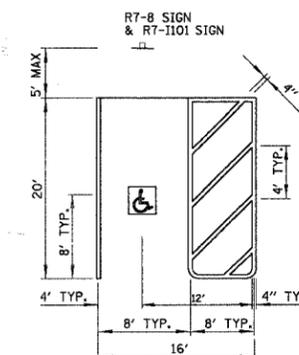

HANDICAP PARKING SPACE

N.T.S.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

LAWRENCE AVENUE CONSTRUCTION DETAILS

SCALE: VERT. HORIZ. 50'
DATE 10/29/2007

DRAWN BY PMM
CHECKED BY LMF