
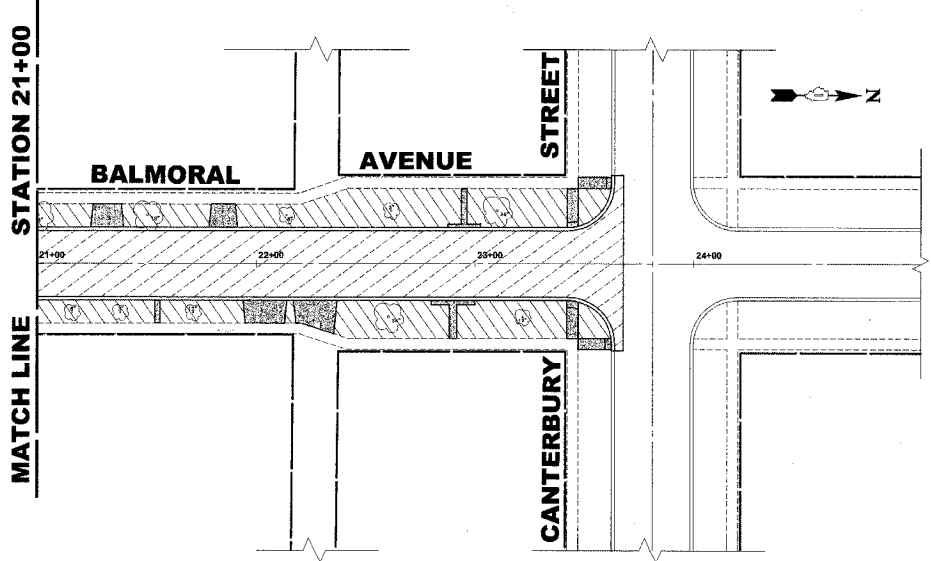
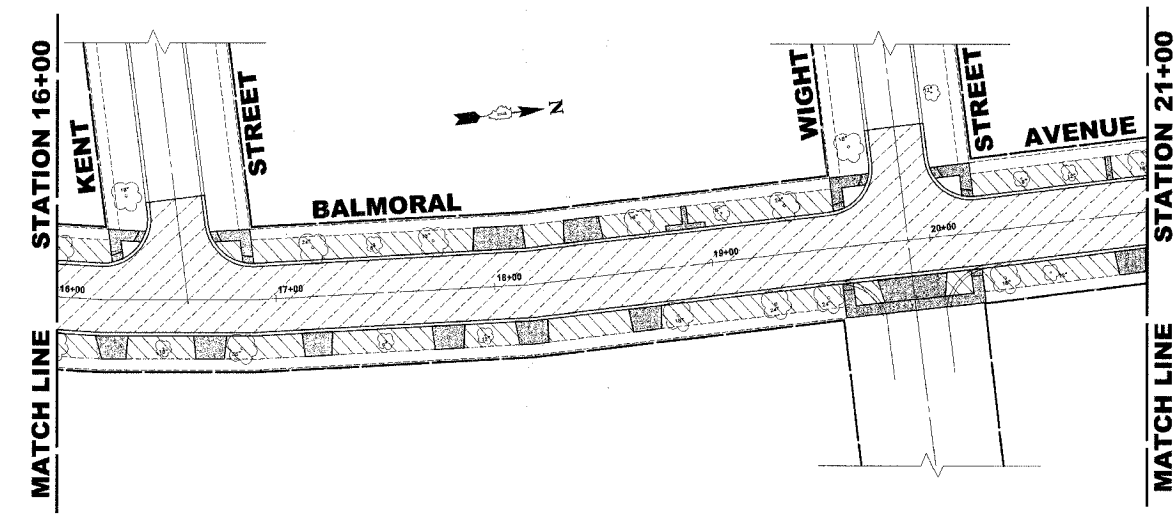
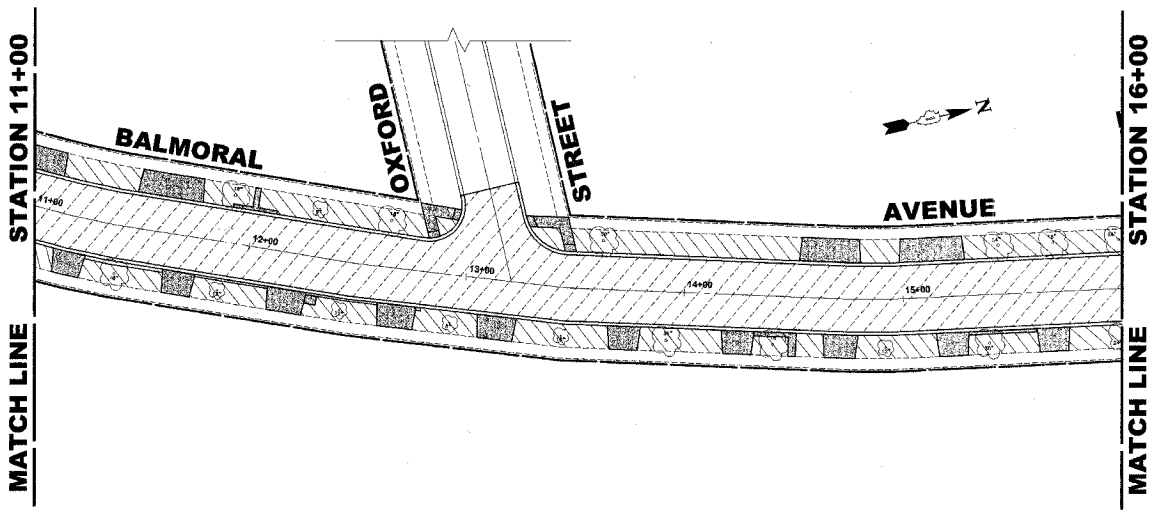
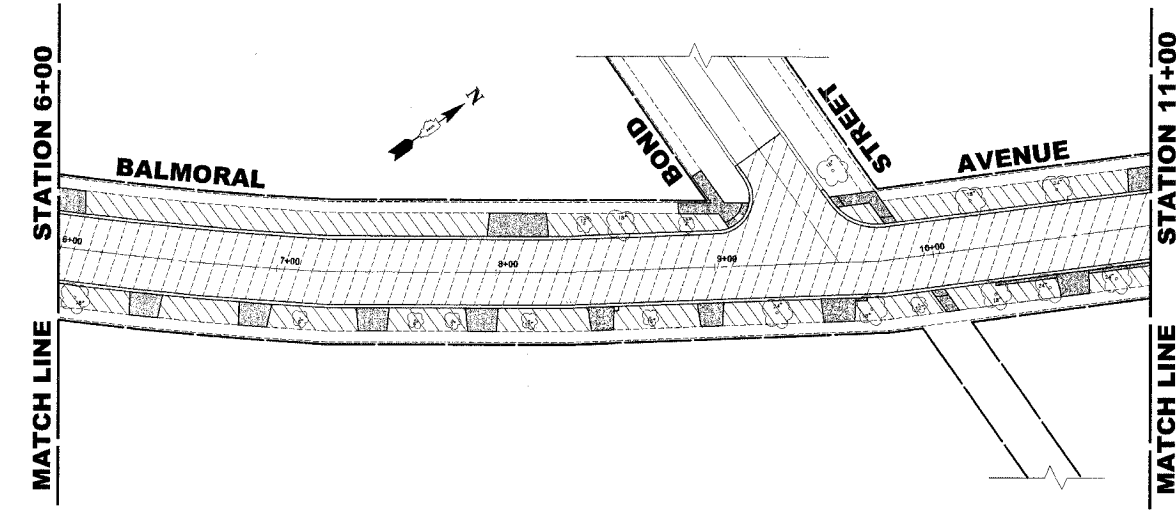


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAU 2712	**	COOK	36	28
ILLINOIS PROJECT		M-8003(655)		
VILLAGE SECTION		05-00069-00-FP		
CONTRACT NO. 83982				

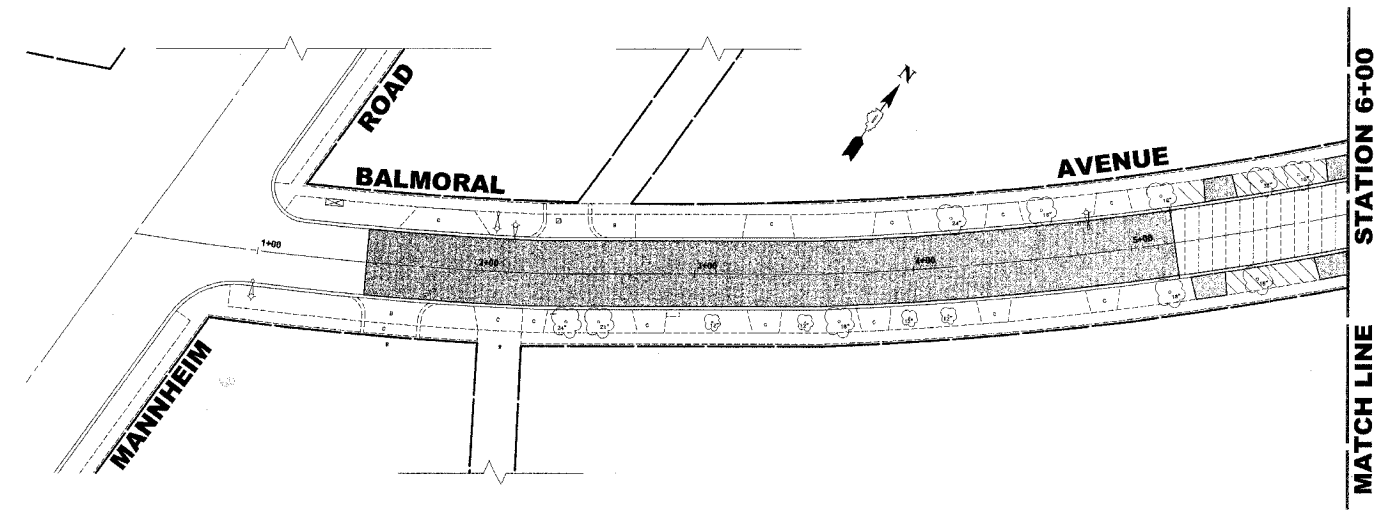

4" TOP SOIL LAYER:
 SOIL SHALL BE SPREAD AS INDICATED ON THE TYPICAL CROSS SECTIONS.
 A MINIMUM OF GRADING TO BE PERMITTED WITHIN AN APPROXIMATE RADIUS OF 6' FROM ALL TREES TO BE SAVED AS DETERMINED BY THE ENGINEER.

LANDSCAPING NOTES

SODDING:
 ALL DISTURBED AREAS INDICATED ON CROSS SECTION OR LANDSCAPING PLANS TO BE SODDED, INCLUDING FERTILIZER NUTRIENTS*, AND SUPPLEMENTAL WATERING WHICH IS TO BE USED AFTER THE INITIAL WATERING (AS SPECIFIED AND AS DIRECTED BY THE ENGINEER) AT THE RATE OF 10 GALLONS PER SQUARE YARD SODDING. SODDED SLOPES WHICH ARE 2:1 OR STEEPER SHALL BE STAKED. (PROVIDE A 3" STRIP AROUND CATCH BASINS IN SEEDING AREAS).

FERTILIZER NUTRIENTS* FOR SODDING:
 USE A FERTILIZER WITH A 1:1:1 RATIO PER ACRE:

60 LBS. NITROGEN FERTILIZER NUTRIENT
 60 LBS. PHOSPHORUS FERTILIZER NUTRIENT
 60 LBS. POTASSIUM FERTILIZER NUTRIENT
 TOTAL: 180 LBS. PER ACRE

LEGEND OF SYMBOLS

SYMBOL	DESCRIPTION
	PROPOSED CONCRETE AREA
	PROPOSED HOT-MIX ASPHALT AREA
	PROPOSED SODDED PARKWAY

Drawing file: W:\Projects\03500160 - Balmoral Avenue Phase 1\Asphalt and Landscaping Plan.dwg Oct 03, 2007 - 4:54pm

HANCOCK ENGINEERING ♦ Civil Engineers
 ♦ Municipal Consultants ♦ Established 1911
 9933 Roosevelt Road Westchester, Illinois 60154-2780
 Phone: 708/865-0300 Fax: 708/865-1212

**BALMORAL AVENUE IMPROVEMENTS
 VILLAGE OF WESTCHESTER, ILLINOIS**

ASPHALT & LANDSCAPING PLAN

SCALE:	NONE	SHEET	28
DRAWN BY:	NAW/LEV/MK	OF	36
BOOK NO.:	1394/1427/LS		
DATE:	10-3-07		
REVISION:		E.I.E. NO.:	838-06-16601