

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
8852	06-00056-01-WR	MADISON	81	58
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		
LANDSCAPING DETAILS				
CONTRACT NO. 97324				

**LANDSCAPING SCHEDULE**


STATION	OFFSET	TREE REMOV 6-15 20100110 (UNIT)	TREE REMOV OVER 15 20100210 (UNIT)	T-ACER RUB OG 2-1/2 (OCTOBER GLORY RED MAPLE) A2001120 (EACH)	T-ACER RUB RS 2-1/2 (RED SUNSET RED MAPLE) A2001220 (EACH)	T-FRAX AP CL 8' (AUTUMN PURPLE WHITE ASH) A2003570 (EACH)	T-LIRIODEN TUL 2-1/2 (TULIP) A2005420 (EACH)	T-QUERCUS RUBRA 2-1/2 (RED OAK) A2007120 (EACH)	T-CERCIS CAN CL 7' (EASTERN REDBUD) B2001168 (EACH)	T-CORNUS FLOR CL 6' (FLOWERING DOGWOOD) B2001366 (EACH)	S-EUONY ALAT COMP 18C (DWARF WINGED EUONYMUS) C2C02618 (EACH)	E-PICEA GLAUCA 6' (WHITE SPRUCE) D2001872 (EACH)	E-PICEA OMORIKA 8' (SERBIAN SPRUCE) D2002088 (EACH)	E-PICEA PUNG GLAU 8' (COLORADO BLUE SPRUCE) D2002288 (EACH)	
<b>POPLAR STREET</b>															
18+68	LT & RT											1	1	2	
18+73	52' RT		18												
19+30	43' RT		28												
19+74	37' LT	8													
20+00	71' LT			1											
20+65	40' LT								1						
21+75	35' LT									1					
25+52 TO 26+04	20.58' LT										14				
26+70	37' LT				1										
26+78	31' LT		30												
27+30	32' LT									1					
27+90	31' LT									1					
28+30	30' LT									1					
28+80	28' LT									1					
29+10	28' RT								1						
29+17	48' LT					1									
31+02	25' RT		18												
<b>IL ROUTE 160 / BROADWAY</b>															
11+70	35' RT								1						
12+45	34' RT			1											
13+00	45' RT				1										
14+85	60' LT							1							
14+91	42' LT		18												
14+92	14' LT		18												
15+38	39' RT			1											
16+00	32' RT									1					
16+20	32' RT									1					
17+00	38' RT								1						
17+20	34' LT					1									
17+85	32' LT			1											
18+71	23' LT		30												
18+75	38' LT							1							
19+46	24' LT		30												
19+50	34' LT						1								
19+67	33' LT	13													
20+30	40' LT									1					
21+00	165' RT							1							
21+70	40' LT												1		
22+60	40' LT				1										
23+20	40' LT			1											
23+27	28' LT		42												
23+63	34' LT														
23+70	40' LT											1			
24+61	26' LT		20												
24+65	38' LT									1					
24+95	38' LT									1					
26+95	38' LT								1						
26+98	31' LT	10													
27+15	38' LT								1						
27+35	38' LT								1						
27+43	30' LT	13													
27+53	30' LT	10													
27+55	38' LT								1						
<b>TOTAL</b>		<b>64</b>	<b>252</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>2</b>	<b>2</b>	<b>8</b>	<b>10</b>	<b>14</b>	<b>2</b>	<b>2</b>	<b>2</b>	

- NOTES:
1. EXACT TREE AND SHRUB LOCATIONS SHALL BE DETERMINED IN THE FIELD BY THE ENGINEER.
  2. TREES WITHIN THE ROUNDABOUT CENTRAL ISLAND SHALL BE PLANTED 25 FEET FROM THE BACK OF THE TRUCK APRON CURB.
  3. PLANT DWARF WINGED EUONYMUS AT 4' CENTERS.
  4. NO TREES SHALL BE PLANTED WITHIN 10 FEET OF A UTILITY LINE, UNLESS DIRECTED OTHERWISE BY THE ENGINEER.
  5. PLANTING TIME, MULCHING, WRAPPING, BRACING AND OTHER ITEMS INVOLVED IN THE PLANTING OF TREES SHALL BE IN ACCORDANCE WITH ARTICLE 253 OF "THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION."
  6. EXISTING TREES LOCATED OUTSIDE THE CONSTRUCTION LIMITS SHALL BE PRESERVED.

**SEEDING SCHEDULE**

STATION	STATION	TOPSOIL F & P 2 21101605 (SQ YD)	SEEDING CL 1B 25000115 (ACRE)	NITROGEN FERT NUTR 25000400 (POUND)	PHOSPHORUS FERT NUTR 25000500 (POUND)	POTASSIUM FERT NUTR 25000600 (POUND)	MULCH METHOD 2 25100115 (ACRE)
<b>POPLAR STREET</b>							
15+75	18+68	374	0.1	9	9	9	0.1
18+68	22+60	797	0.2	18	18	18	0.2
22+60	34+00	1243	0.3	27	27	27	0.3
<b>IL ROUTE 160 / BROADWAY</b>							
10+00	13+96	877	0.2	18	18	18	0.2
13+96	29+00	1590	0.3	27	27	27	0.3
<b>TOTAL</b>		<b>4,881</b>	<b>1.1</b>	<b>99</b>	<b>99</b>	<b>99</b>	<b>1.1</b>

- SEEDING NOTES:
1. THE PREPARED SEED BED SHALL BE FREE OF ALL CONSTRUCTION DEBRIS AND AGGREGATE PRIOR TO SEEDING.

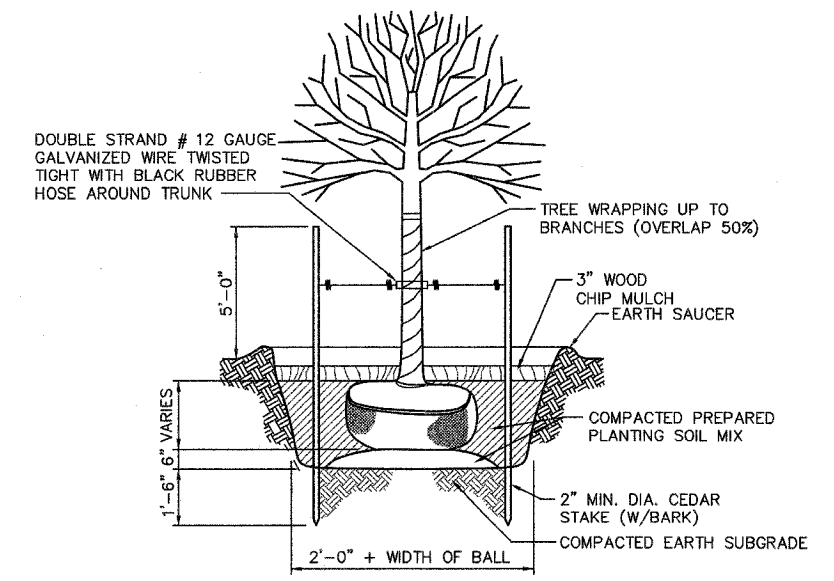

**TREE PLANTING DETAIL**  
(NOT TO SCALE)