

1A

JA033
TOTAL SHEETS = 8

CONSTRUCTION PLANS FOR JACKSONVILLE MUNICIPAL AIRPORT


JACKSONVILLE, MORGAN COUNTY, ILLINOIS

REHABILITATE T-HANGAR ACCESS PAVEMENT AND CONSTRUCT STORM SEWER

ILLINOIS PROJECT NO. IJX-3714
AIP PROJECT NO. 3-17-0054-B11
DECEMBER 7, 2007

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR152410	UNCLASSIFIED EXCAVATION	CU. YD.	21	
AR152455	EMBANKMENT IN PLACE	CU. YD.	80	
AR208910	REMOVE & REPLACE AGGREGATE BASE	SQ. YD.	37	
AR209510	CRUSHED AGGREGATE BASE COURSE	TON	148	
AR209650	AGGREGATE BASE PREPARATION	SQ. YD.	3,618	
AR401610	BITUMINOUS SURFACE COURSE	TON	624	
AR401901	REMOVE BITUMINOUS SURFACE COURSE	SQ. YD.	3,608	
AR401910	REMOVE & REPLACE BIT. PAVEMENT	SQ. YD.	12	
AR501900	REMOVE PCC PAVEMENT	SQ. YD.	29	
AR501910	REMOVE & REPLACE PCC PAVEMENT	SQ. YD.	154	
AR602510	BITUMINOUS PRIME COAT	GAL.	1,266	
AR603510	BITUMINOUS TACK COAT	GAL.	109	
AR701512	12" RCP, CLASS IV	LIN. FT.	440	
AR701515	15" RCP, CLASS IV	LIN. FT.	192	
AR701518	18" RCP, CLASS IV	LIN. FT.	116	
AR701900	REMOVE PIPE	LIN. FT.	94	
AR751411	INLET - TYPE A	EACH	6	
AR751540	MANHOLE 4'	EACH	3	
AR751943	ADJUST MANHOLE	EACH	1	
AR901510	SEEDING	ACRE	0.3	
AR908510	MULCHING	ACRE	0.3	

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	TYPICAL SECTIONS AND STORM SEWER DETAILS
4	STORM SEWER LAYOUT
5	T-HANGAR PAVEMENT ELEVATIONS AND GRADING LAYOUT
6-7	ENTRANCE ROAD SIDE DITCH CROSS SECTIONS
8	STANDARD DRAWINGS

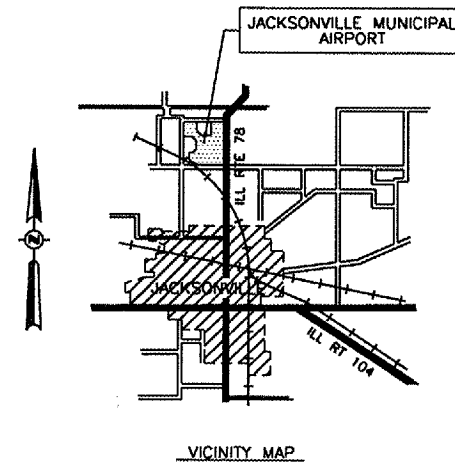

	PLANS PREPARED BY : HUTCHISON ENGINEERING, INC. JACKSONVILLE, ILLINOIS	JACKSONVILLE AIRPORT AUTHORITY
	SUBMITTED <i>David Hutchison</i> DATE <u>11/13/07</u>	APPROVED <i>Wm. David Wane</i> CHAIRMAN DATE <u>11-13-07</u> APPROVED <i>Eric R. ...</i> SECRETARY DATE <u>11-13-07</u>