

NORTH EDGE OF SHOULDER


Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Slab	199+32.75	-20.00	580.05
A1	199+42.75	-20.00	579.78
A2	199+52.75	-20.00	579.53
E. End W. Appr. Slab	199+62.75	-20.00	579.29

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Slab	199+32.75	-12.00	580.21
A1	199+42.75	-12.00	579.95
A2	199+52.75	-12.00	579.70
E. End W. Appr. Slab	199+62.75	-12.00	579.46

℄ ROADWAY & PGL

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Slab	199+32.75	0.00	580.40
A1	199+42.75	0.00	580.14
A2	199+52.75	0.00	579.89
E. End W. Appr. Slab	199+62.75	0.00	579.64

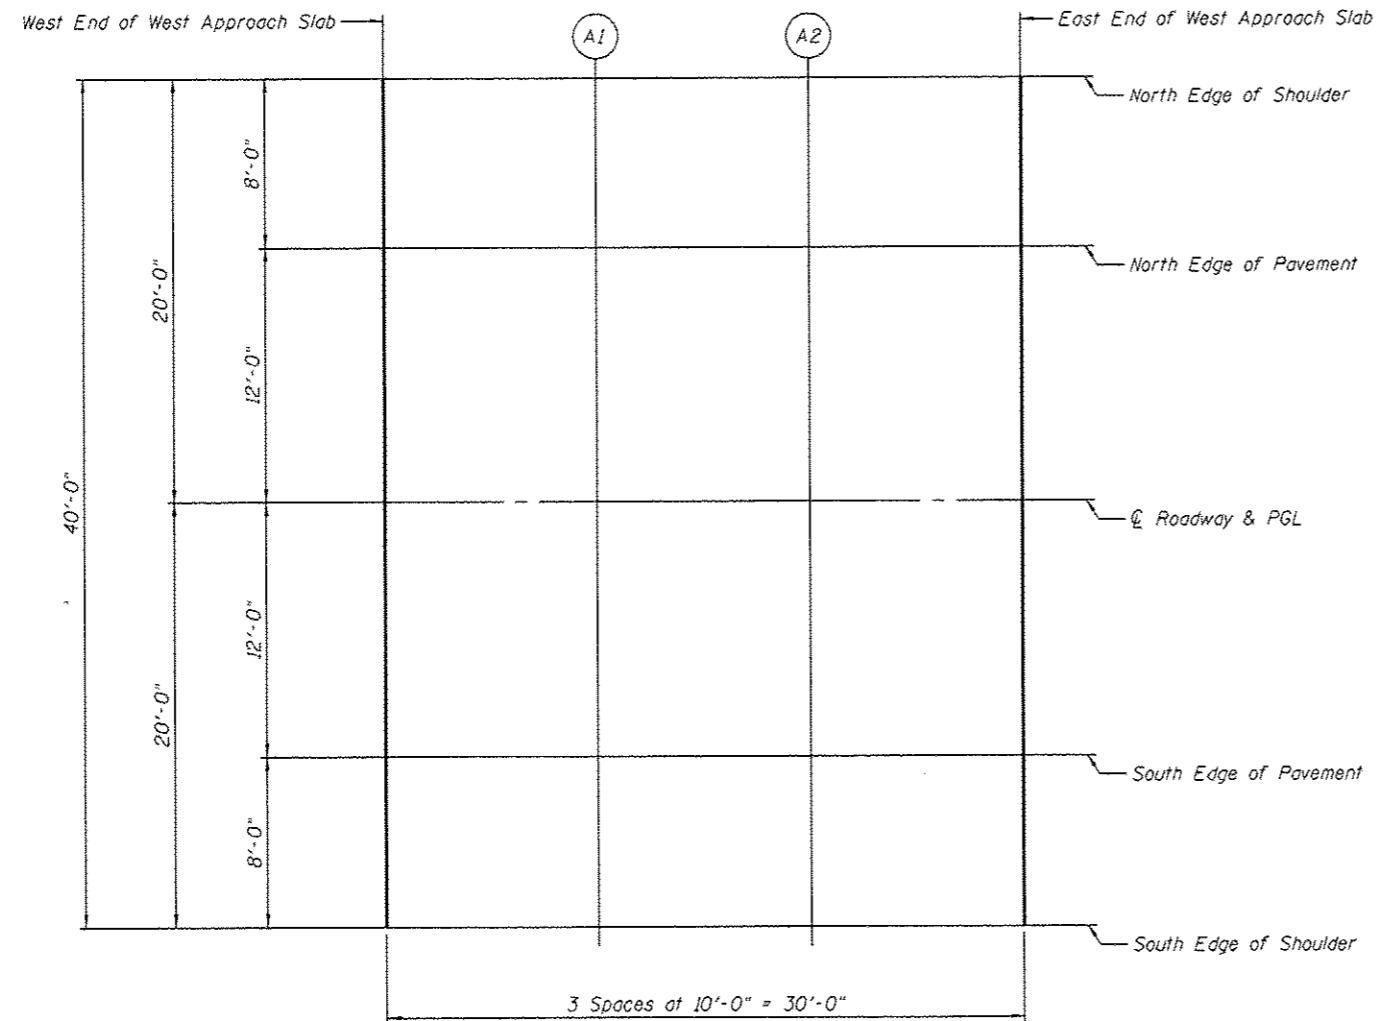

PLAN

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Slab	199+32.75	12.00	580.21
A1	199+42.75	12.00	579.95
A2	199+52.75	12.00	579.70
E. End W. Appr. Slab	199+62.75	12.00	579.46

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Slab	199+32.75	20.00	580.05
A1	199+42.75	20.00	579.78
A2	199+52.75	20.00	579.53
E. End W. Appr. Slab	199+62.75	20.00	579.29

P:\P-10\2356 - Smithville Road Bridge\09\1\400 Sheets\Structure\0723148-2356-004-105\slabtop.dgn 5/8/14 8 PM

INFRASTRUCTURE ENGINEERING
 456 Fulton Street | Suite 104 | Peoria, IL 61602
 P: 309.233.6262 | F: 309.233.6263 | www.infrastructureeng.com

USER NAME #	DESIGNED - LAN	REVISED -
PLLOT SCALE #	CHECKED - SPK	REVISED -
PLLOT DATE #	DRAWN - LAN	REVISED -
	CHECKED - SPK	REVISED -

**PEORIA COUNTY
HIGHWAY DEPARTMENT**

**TOP OF WEST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 072-3148**

F.A.S. RTE. 1381	SECTION 10-00005-03-BR	COUNTY PEORIA	TOTAL SHEETS 55	SHEET NO. 26
				CONTRACT NO. 89464
ILLINOIS FED. AID PROJECT				