
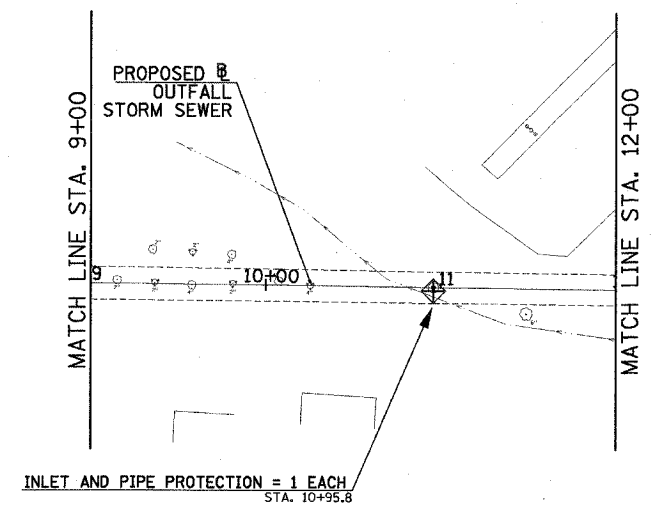
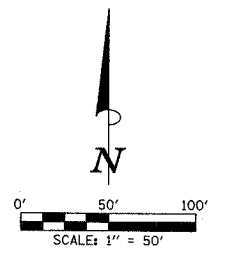


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
807	00-00374-00-PV	CHAMPAIGN	149	57
STA.	TO STA.			
FEB. ROAD DIST. NO. 7	ILLINOIS	F.A. PROJECT M-5181(38)		

CONTRACT NO. 91308

**LEGEND**

- CONSTRUCTION LIMITS
- ◇ INDICATES TEMPORARY DITCH CHECK
- ◇ INDICATES INLET AND PIPE PROTECTION
- INDICATES PERIMETER EROSION BARRIER

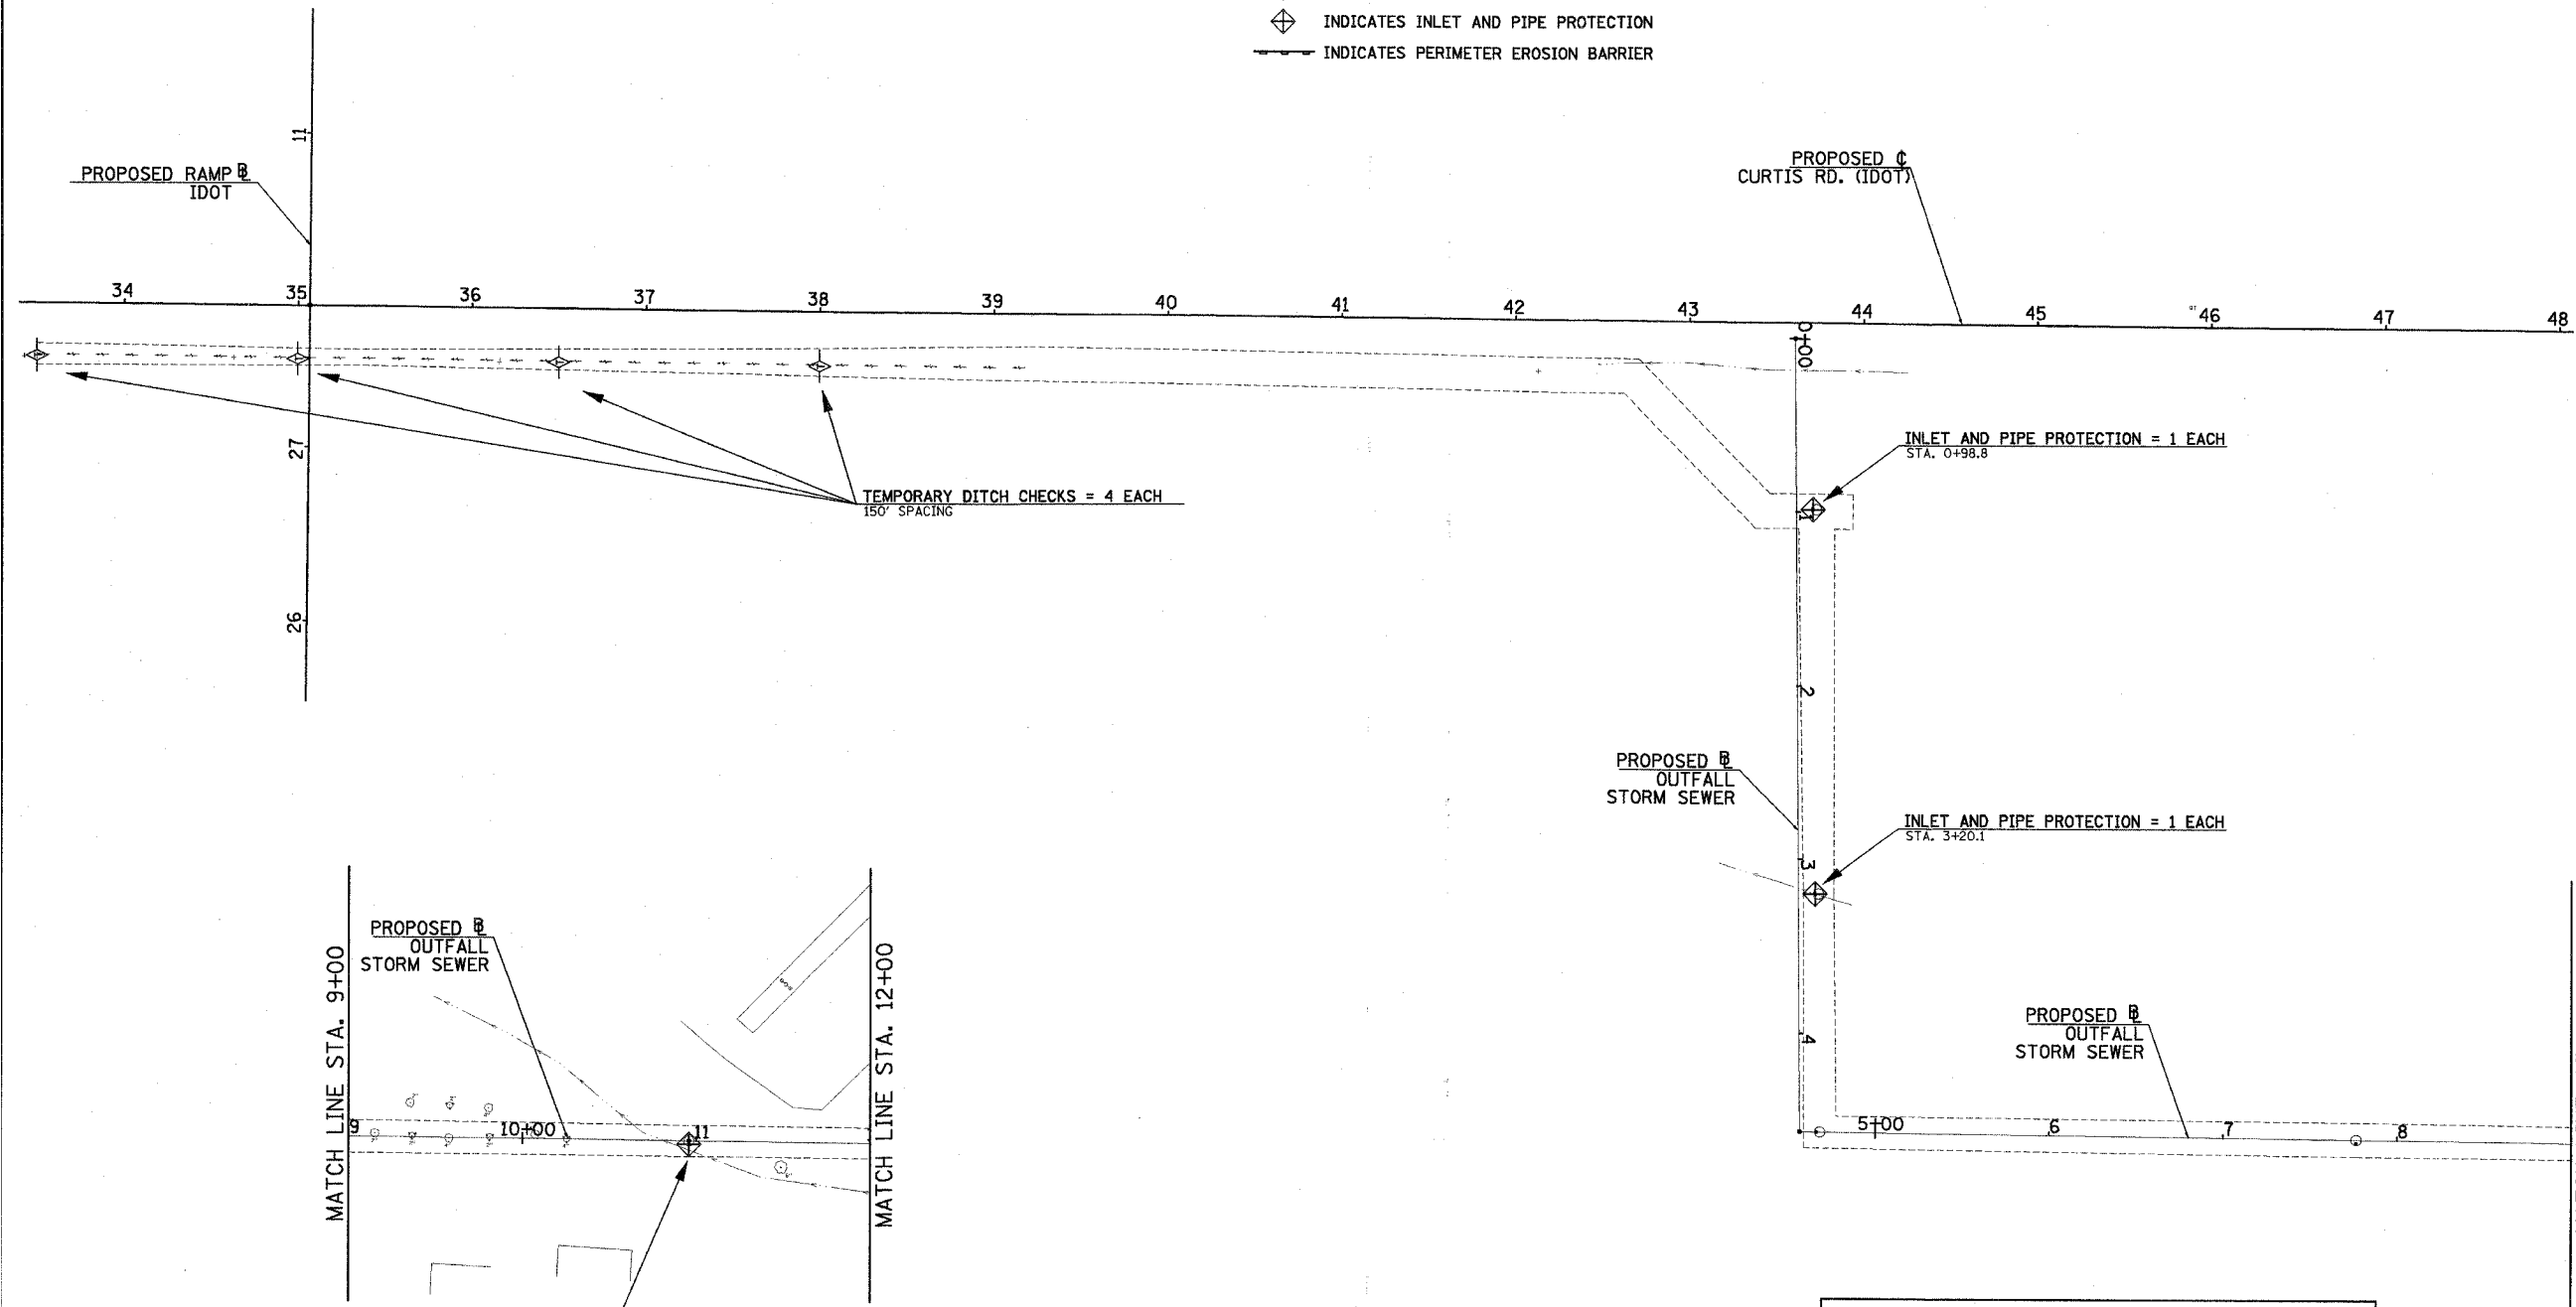

PROPOSED B OUTFALL STORM SEWER

INLET AND PIPE PROTECTION = 1 EACH  
STA. 3+20.1

PROPOSED B OUTFALL STORM SEWER

- EROSION CONTROL SYSTEMS INSTALLATION SEQUENCE**
- REFER TO THE STAGE CONSTRUCTION AND MAINTENANCE OF TRAFFIC PLAN SHEETS FOR THE DETAILED SEQUENCE OF CONSTRUCTION AND STAGING PLAN.
  - PLACE THE PERIMETER EROSION BARRIER PRIOR TO STARTING ANY WORK.
  - INSTALL TEMPORARY DITCH CHECKS, INLET AND PIPE PROTECTION, INLET FILTERS AND TEMPORARY SEEDING AS SOON AS THE ROUGH GRADING IS COMPLETE OR DRAINAGE STRUCTURES HAVE BEEN CONSTRUCTED.
  - MAINTAIN ALL EROSION CONTROL SYSTEMS UNTIL SUCH TIME THAT THEY CAN BE REMOVED AS DIRECTED BY THE ENGINEER.
  - SEED, FERTILIZE, MULCH, AND PLACE SOD AS SOON AS FINAL GRADING AND SHAPING IS COMPLETE.
  - REMOVE AND CLEANUP ALL REMAINING EROSION CONTROL SYSTEMS AS DIRECTED BY THE ENGINEER.

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**STORM WATER POLLUTION PREVENTION PLAN**

DATE : 8-05  
DRAWN BY : S.M.W.  
CHECKED BY : R.L.H.

SCALE : 1"=50'