CONTRACT # 91353

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
642	99-00124-02-PV	COLES	229	77
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

*	780E			800E			870E			900E		
	STATION	OFFSET	ELEVATION	STATION	OFFSET	ELEVATION	STATION	OFFSET	ELEVATION	STATION	OFFSET	ELEVATION
A	210+88.67	12.00	693.11	223+89.22	12.00	690.85	264+89.80	17.32	687.40	275+59.33	12.00	679.15
B	211+24.34	26.96	692.60				265+25.92	31.53	685.80			
C	211+38.66	62.89	692.35				265+41.00	67.31	685.06			
D	211+60.66	63.28	692.37				265+59.00	64.30	685.26			
E	211+75.65	26.33	692.66				265+73.25	29.34	685.59			
F	212+10.69	12.00	693.12	225+07.23	12.00	691.16	266+07.87	14.31	685.38	276+79.33	12.00	678.82
G	212+10.69	12.00	693.12	225+07.23	12.00	691.16	266+07.87	12.00	685.41	276+79.33	12.00	678.82
H				224+72.15	26.38	690.46				276+44.04	26.59	678.40
I				224+57.24	61.25	690.07				276+29.34	61.84	678.03
J				224+39.22	62.75	690.04				276+09.33	62.16	678.03
K				224+24.84	26.91	690.35				275+94.75	26.70	678.46
L	210+88.67	12.00	693.11	223+89.22	12.00	690.85	264+89.80	12.60	687.47	275+59.33	12.00	679.15
M	210+88.67	30.30	690.46				264+70.12	79.52	674.00			
N	211+15.86	38.24	690.51				264+93.24	94.33	673.92			
O	211+30.57	62.74	690.55				265+03.00	120.00	673.64			
P	211+71.38	63.47	689.70				265+94.34	100.58	673.59			
Q	211+85.71	41.79	689.66				266+10.04	70.99	674.45			
R	212+10.69	33.79	689.60				266+40.08	56.25	675.00			
S				225+07.23	38.01	686.58				276+81.14	35.50	674.87
T				224+89.10	45.93	685.86				276+50.39	50.44	674.66
U				224+71.42	63.24	686.37				276+40.89	77.00	674.85
V				224+24.95	62.54	686.37				275+97.90	80.45	674.87
W				224+19.24	51.54	685.52				275+74.00	44.19	674.50
X				224+08.19	45.35	684.86				275+60.00	40.29	674.25
AA	211+14.12	12.00	693.12	224+14.60	12.00	690.90	265+15.40	16.67	686.93	275+84.42	12.00	679.08
BB	211+39.57	12.00	693.13	224+39.98	12.00	690.96	265+41.00	16.02	686.48	276+09.50	12.00	679.01
CC	211+39.11	37.44	692.56				265+41.00	41.66	685.63			
DD	211+61.13	36.55	692.58				265+59.00	39.93	685.66			
EE	211+61.57	12.00	693.13	224+57.98	12.00	691.01	265+59.00	15.56	686.17	276+29.50	12.00	678.96
FF	211+86.13	12.00	693.13	224+82.61	12.00	691.08	265+83.43	14.94	685.77	276+54.42	12.00	678.89
GG	211+86.13	12.00	693.13	224+82.61	12.00	691.08	265+83.43	12.00	685.81	276+54.42	12.00	678.89
HH	211+61.57	12.00	693.13	224+57.98	12.00	691.01	265+59.00	12.06	686.22	276+29.50	12.00	678.96
II				224+57.61	36.62	690.44				276+29.42	36.92	678.41
JJ				224+39.60	37.38	690.42				276+09.42	37.08	678.40
KK	211+39.57	12.00	693.13	224+39.98	12.00	690.96	265+41.00	12.15	686.54	276+09.50	12.00	679.01
LL	211+14.12	12.00	693.12	224+14.60	12.00	690.90	265+15.40	12.34	687.00	275+84.42	12.00	679.08
MM	211+31.95	19.48	692.86				265+33.46	23.77	686.16			
NN	211+68.61	19.17	692.90				265+66.12	22.45	685.89			
OO				224+65.06	19.19	690.74				276+36.77	19.29	678.68
PP				224+32.41	19.46	690.65				276+02.12	19.35	678.74

* ALL STATIONS AND OFFSETS ARE REFERENCED TO COUNTY HIGHWAY 18

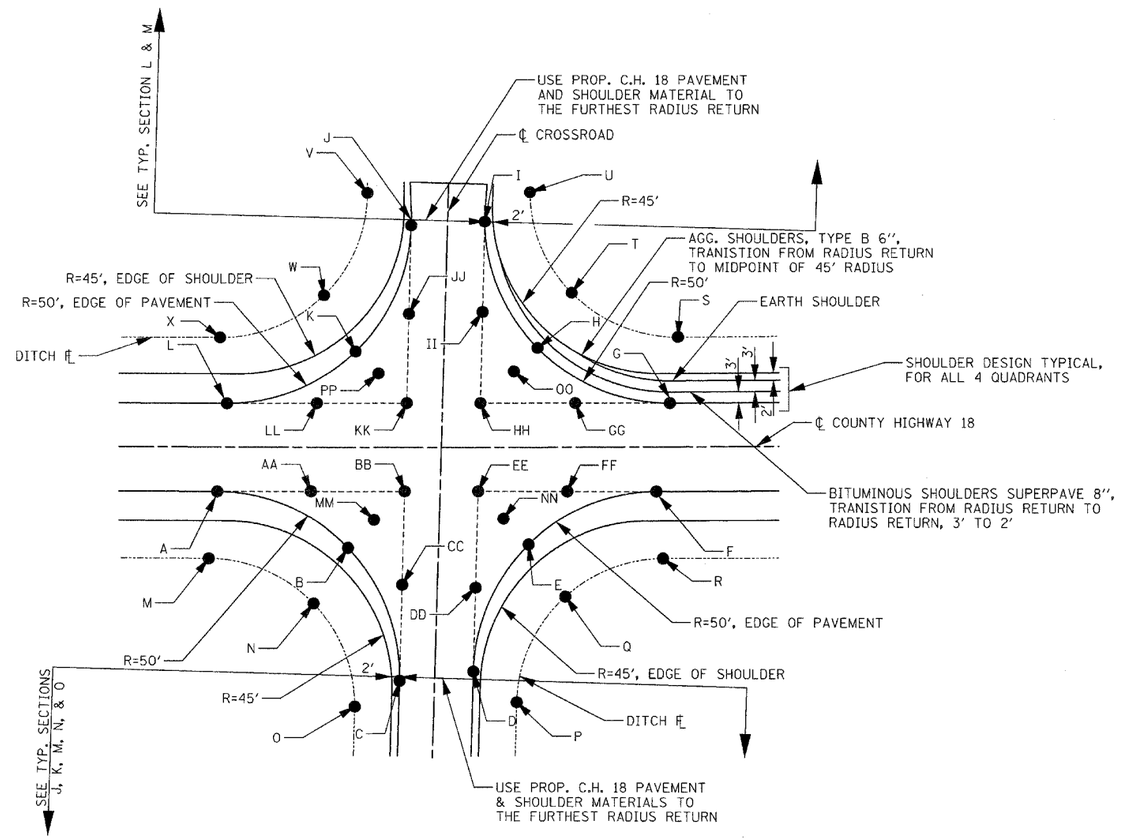

TYPICAL INTERSECTION DETAIL OF TOWNSHIP ROADS

N

20 0 20
GRAPHIC SCALE

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

INTERSECTION DETAILS
TOWNSHIP ROADS
FAI-57, FAS 642
SEC NO. 15-23K, 99-00124-02-PV
COLES COUNTY, ILLINOIS

SCALE: 1″=20′ DRAWN BY DJP
DATE 07/13/2005 CHECKED BY SKM

© Copyright Hanson Professional Services Inc. 2005

HANSON

LAYOUT DJP/SKM 03/29/03
DRAWN DJP 04/29/03
REVISED SKM 06/01/05
07/13/2005
I:\97-108S\97-620286\Civil\Sheets\c-504int.dgn