
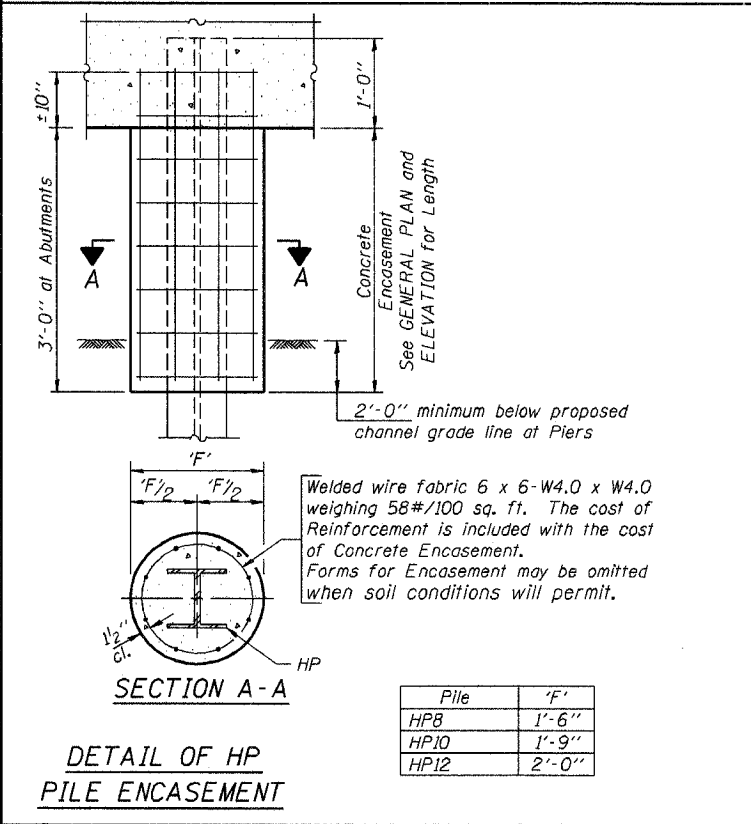
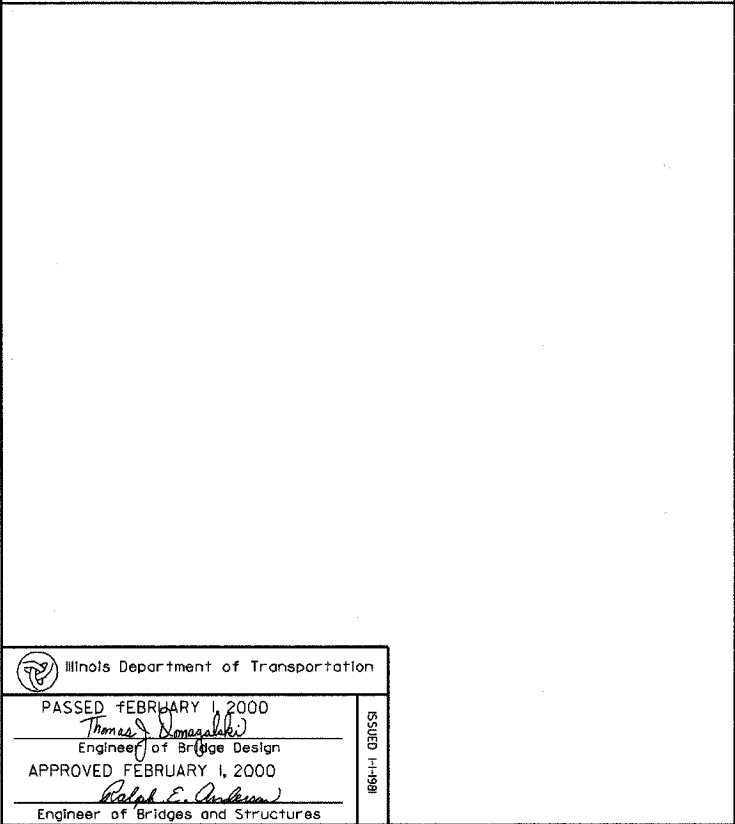
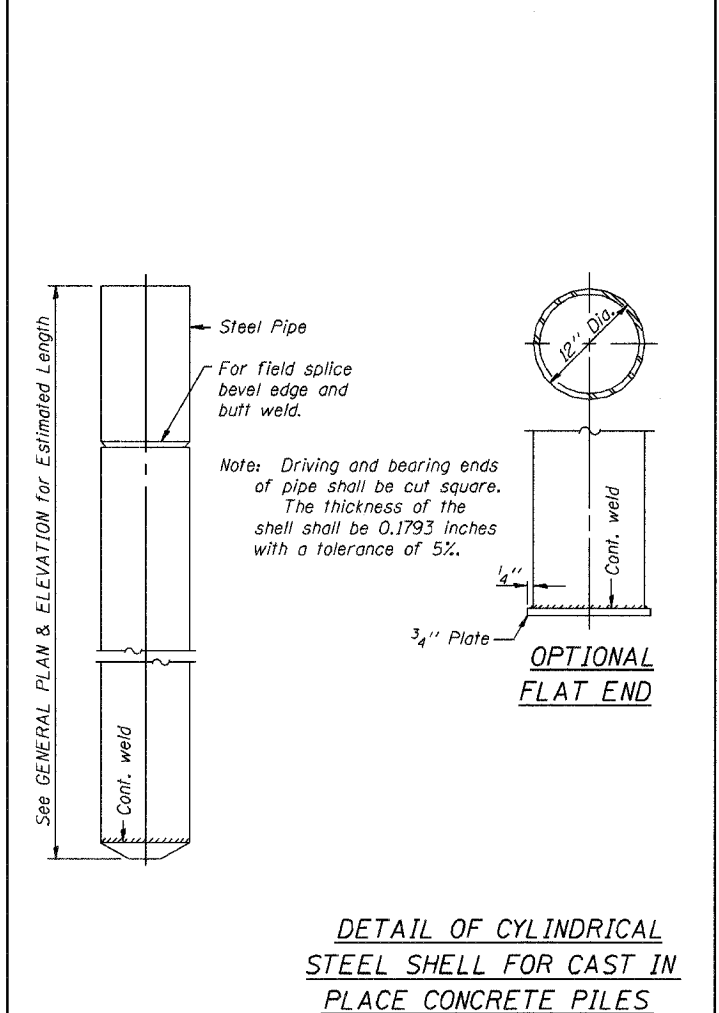
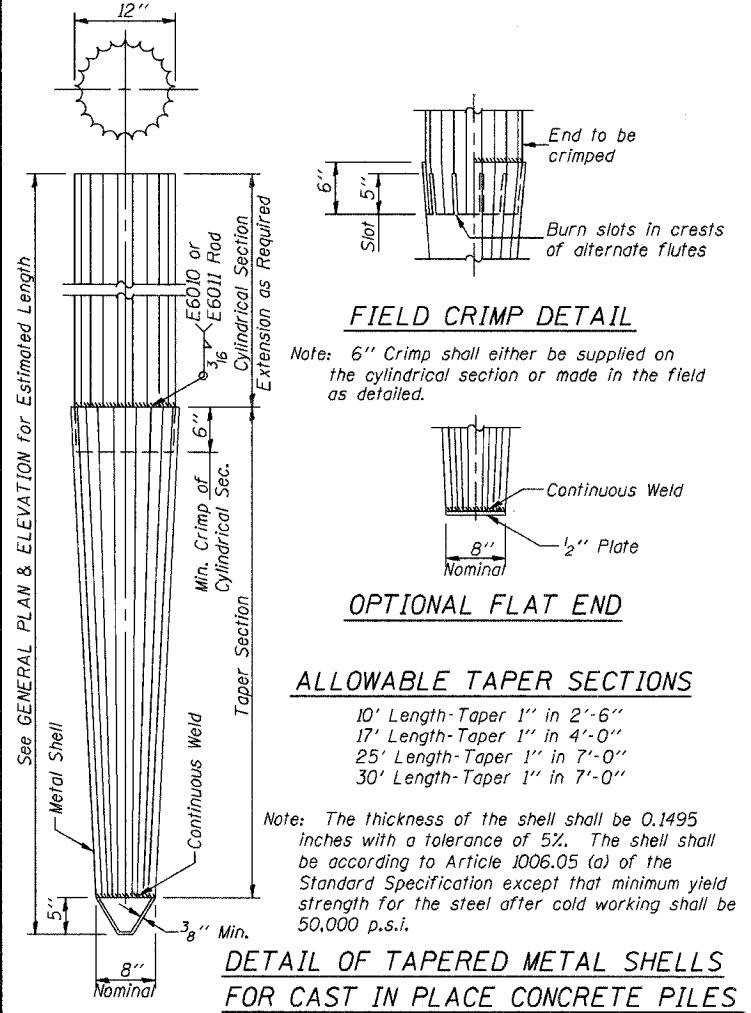


F.A.S. SHEET NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET
	05-021A-00-BR	CRAWFORD	11	11
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	PROJECT		

Reinforcement cage shall be omitted when Concrete Encasement is provided.

The cost of Reinforcement is included with the Cost of Furnishing Piles.

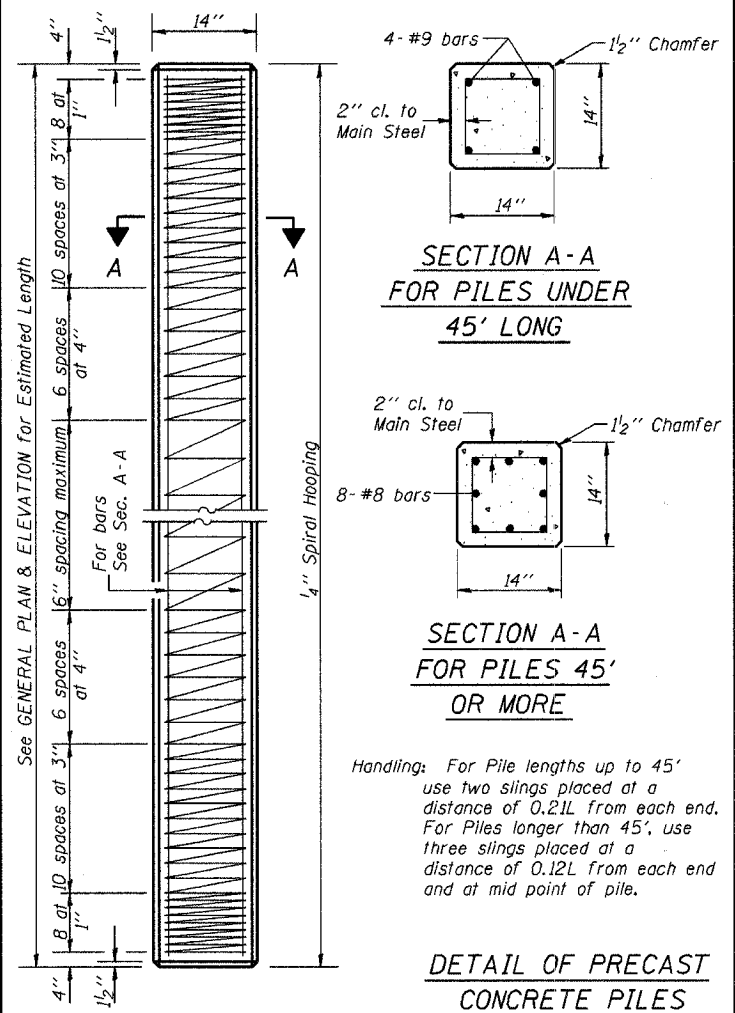

QUANTITIES/FT. OF ENCASEMENT (STEEL PILES)

Pile Size	Item	Quantity
HPB	Concrete Encasement	0.063 C.Y.
HP10	Concrete Encasement	0.086 C.Y.
HP12	Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Concrete Encasement	0.087 C.Y.

PILE DETAILS

STANDARD CX-1

Illinois Department of Transportation
 PASSED FEBRUARY 1, 2000
 Approved by: *Thomas J. Domagala*
 Engineer of Bridge Design
 APPROVED FEBRUARY 1, 2000
 Approved by: *Ralph E. Anderson*
 Engineer of Bridges and Structures