


## BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT CHAMPAIGN COUNTY

Location No.	Structure No.	Mounting OFFSET to the near edge of sign	Mounting HEIGHT to the bottom edge of sign	Sign Size W x h ft	Sign Width W ft	0.2W a ft	0.6W b ft	0.2W c ft	Clear Height CH ft	Sign Height h ft	leg 1 l1 ft	leg 2 l2 ft	main post 1 m1 ft	main post 2 m2 ft	stub post s ft	Total post 1 t1 ft	Total post 2 t2 ft	Post Type	Nominal wt. lbs/ft	Total Weight (both posts) lbs	Total Concrete cu. yds.
5-03	5 C 010 I074 L183.90	30 feet from white stripe / edge of pavement	10 feet from white stripe / edge of pavement	11.0' x 10.5'	11.0	2.2	6.6	2.2	14.5	10.5	13.5	14.50	24.0	25.0	3.5	27.5	28.5	W14 x 38	38.0	2128.0	4.18
5-04	5 B 010 U045 L012.58	4 feet from the back of curb	7 feet above the top of curb	11.5' x 5.5'	11.5	2.3	6.9	2.3	7.5	5.5	7.0	7.5	12.5	13.0	2.5	15.0	15.5	W6 x 15	15.0	457.5	1.40

Location No.	Structure No.	Station - Proposed Location
5-03	5 C 010 I074 L183.90	The proposed breakaway ground mount is to be moved 28' west of the existing cantilever (from Sta. 1319+39 to Sta. 1319+11).
5-04	5 B 010 U045 L012.58	The proposed breakaway ground mount is to be moved 31' north of the existing bridge mount (from Sta. 38+46 to Sta. 38+77).

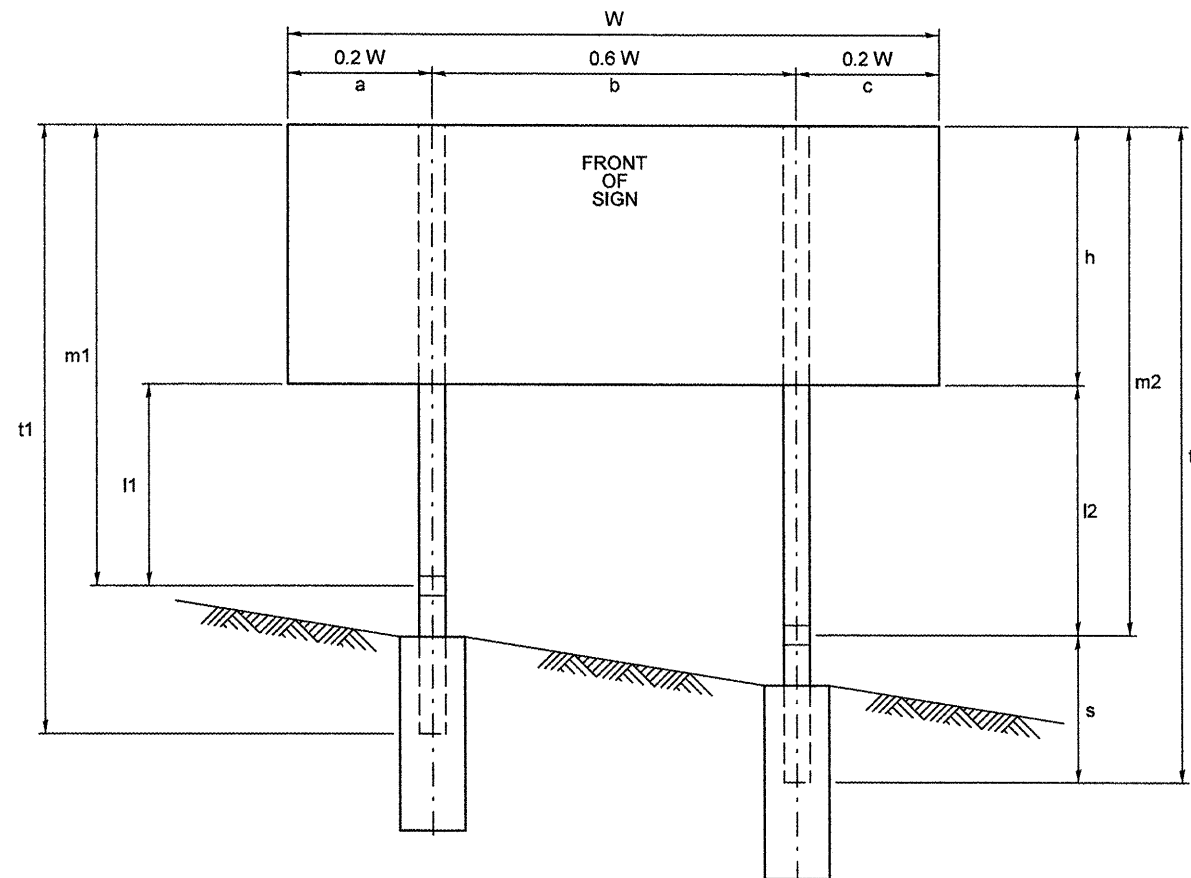

CH = Clear Height = the greater of l1 or l2

FILE NAME =	USER NAME = ceerlockjd	DESIGNED - JAL	REVISED -
ce:\pwwork\pwwork\ceerlockjd\0266557\046179-shd-details.dgn		DRAWN -	REVISED -
PLOT SCALE = 48.0000' / 1" =		CHECKED -	REVISED -
PLOT DATE = 10/7/2011		DATE - 04/26/11	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT  
CHAMPAIGN COUNTY**

SCALE: SHEET NO. 15 OF 17 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	**	Various	178	41
CONTRACT NO. 46179				
ILLINOIS FED. AID PROJECT				

•VARIOUS COUNTIES  
••D-5 OVD SIN STR REPL 2012-06