


BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT MCLEAN COUNTY – US 51 BUSN.

Location No.	Structure No.	Mounting OFFSET to the near edge of sign	Mounting HEIGHT to the bottom edge of sign	Sign Size W x h ft	Sign Width W ft	0.2W a ft	0.6W b ft	0.2W c ft	Clear Height CH ft	Sign Height h ft	leg 1 l1 ft	leg 2 l2 ft	main post 1 m1 ft	main post 2 m2 ft	stub post s ft	Total post 1 t1 ft	Total post 2 t2 ft	Post Type	Nominal wt. lbs/ft	Total Weight (both posts) lbs	Total Concrete cu. yds.
5-17	5 S 057 U051 R006.80	29 feet from edge of pavement = 21 feet from edge of shoulder	7 feet from white stripe / edge of pavement	11.5' x 10.0'	11.5	2.3	6.9	2.3	9.5	10.0	9.0	9.5	19.0	19.5	3.0	22.0	22.5	W10 x 22	22.0	979.0	2.36
5-18	5 C 057 U051 L006.90	18 feet from edge of pavement = 10 feet from edge of shoulder	7 feet from white stripe / edge of pavement	12.0' x 5.5'	12.0	2.4	7.2	2.4	9.0	5.5	8.0	9.0	13.5	14.5	2.5	16.0	17.0	W6 x 15	15.0	495.0	1.40
5-19	5 C 057 U051 L007.30	18 feet from edge of pavement = 10 feet from edge of shoulder	7 feet from white stripe / edge of pavement	11.5' x 10.0'	11.5	2.3	6.9	2.3	9.0	10.0	8.0	9.0	18.0	19.0	3.0	21.0	22.0	W10 x 22	22.0	946.0	2.36

Location No.	Structure No.	Station - Proposed Location
5-17	5 S 057 U051 R006.80	The proposed breakaway ground mount is to be at Sta. 41+30. This is 230' north of the existing simple span to be removed (Sta. 39+00). This is also 31' south of the existing ground mount to be removed (Sta. 41+61).
5-18	5 C 057 U051 L006.90	The proposed breakaway ground mount is to be at Sta. 44+70. This is 140' north of the existing simple span to be removed (43+30).
5-19	5 C 057 U051 L007.30	The proposed breakaway ground mount is to be at Sta. 58+40. This is 140' north of the existing simple span to be removed (57+00).

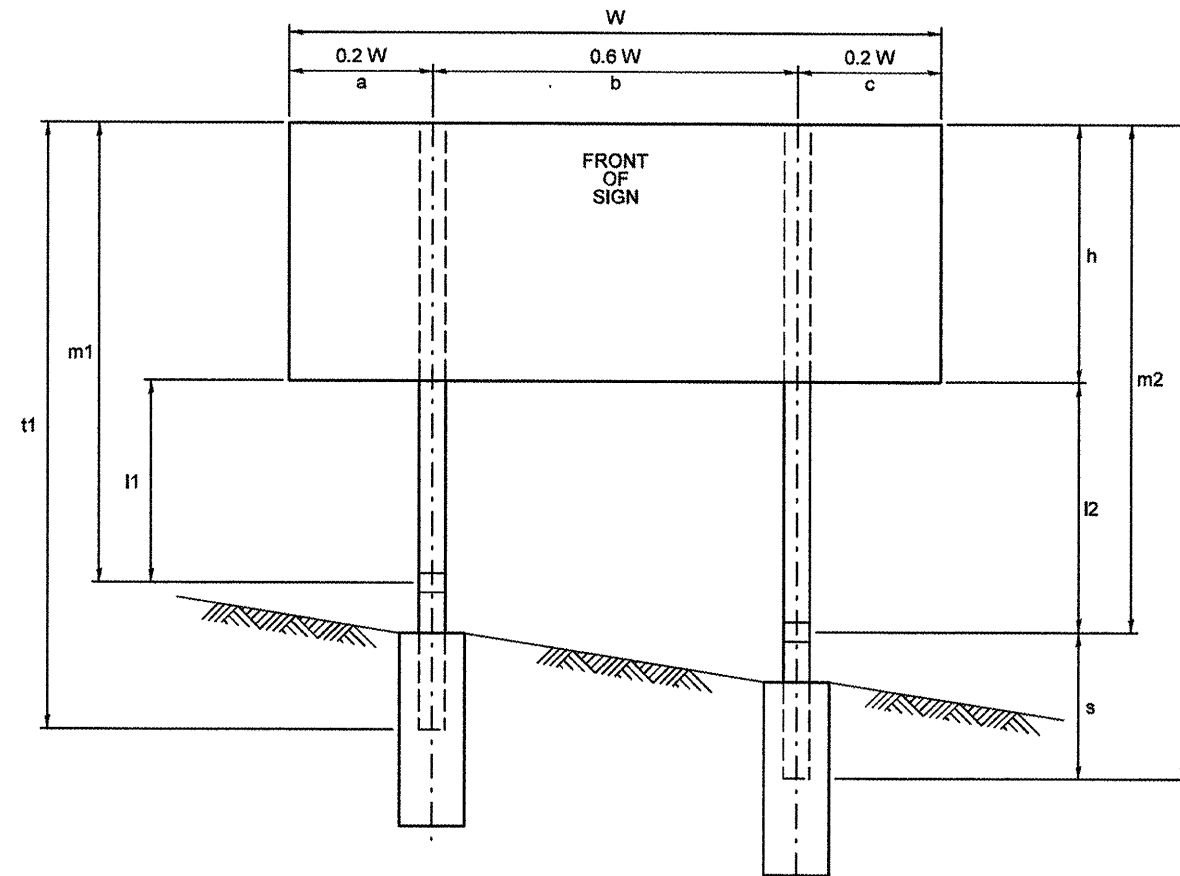

CH = Clear Height = the greater of l1 or l2

FILE NAME =	USER NAME = ceer-lock.jd	DESIGNED - JAL	REVISED -
et:\pwwork\pwwork\ceer-lock.jd\0266557.D	46179-shit-details.dgn	DRAWN -	REVISED -
	PLDT SCALE = 48,0000 ' / in.	CHECKED -	REVISED -
	PLOT DATE = 10/7/2011	DATE - 04/26/11	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT
MCLEAN COUNTY – US 51 BUSN.**

SCALE: SHEET NO. 12 OF 12 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	**	Various	178	151
CONTRACT NO. 46179				
ILLINOIS FED. AID PROJECT				

•VARIOUS COUNTIES
••D-5 OVD SIN STR REPL 2012-06