


6C0841055L103.6



6.0" Radius, 2.0" Border, White on Blue;
 "REST" ClearviewHwy-5-W; "AREA" ClearviewHwy-5-W; Standard Arrow Custom 35.8" X 21.6" 45°;

6C0841055L099.6

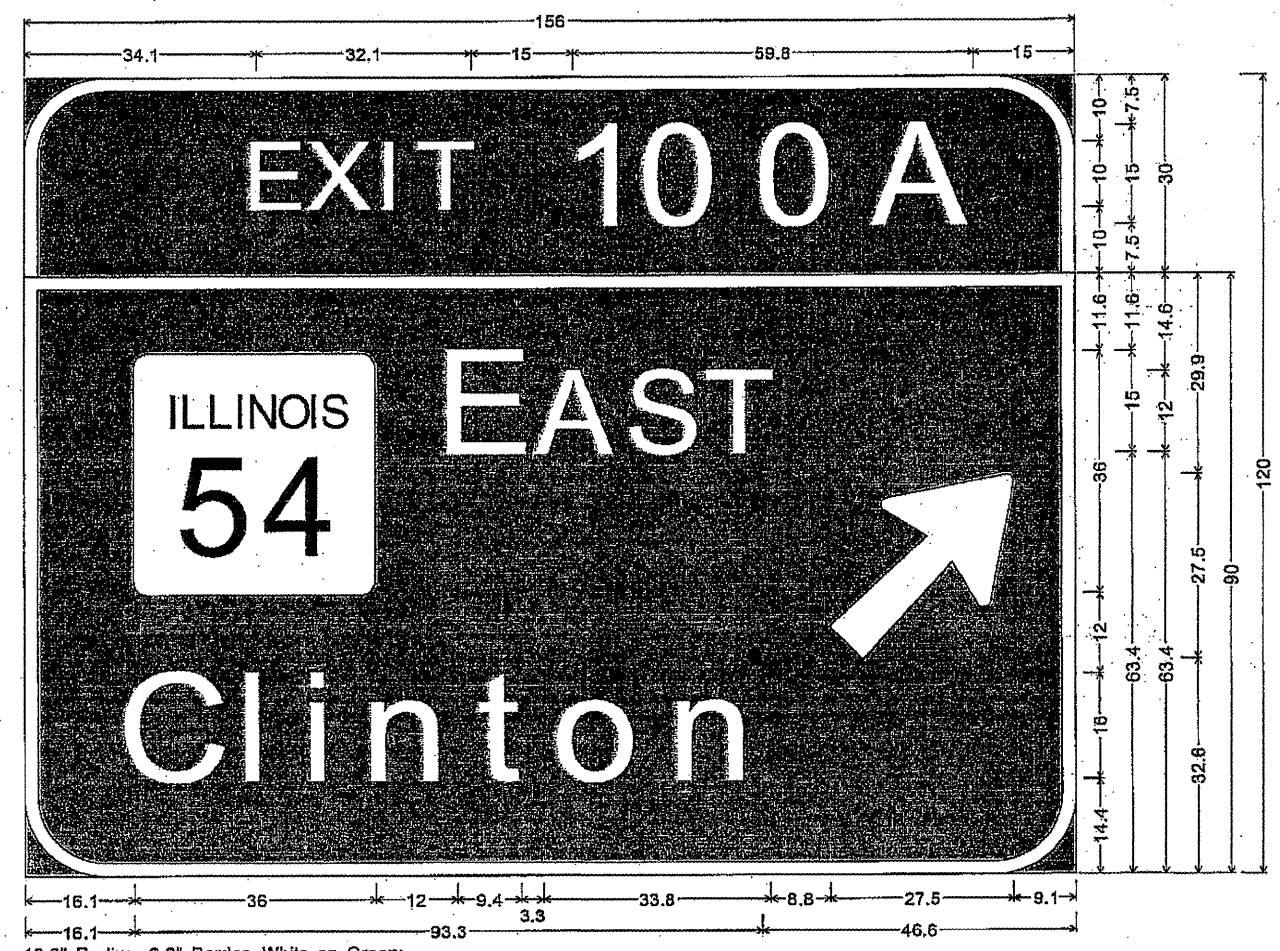

12.0" Radius, 2.0" Border, White on Green;
 "EXIT 100A" ClearviewHwy-5-W;
 12.0" Radius, 2.0" Border, White on Green;
 "E AST" ClearviewHwy-5-W; "Clinton" ClearviewHwy-5-W; Arrow 160 - 35.0" 45°;

| | | | |
|--|----------------------|------------|-----------|
| FILE NAME * | USER NAME * kellej_b | DESIGNED - | REVISED - |
| S:\Sign Truss Plan Details\46196\46196SignRepl.dgn | | DRAWN - | REVISED - |
| PLOT SCALE = 0.1800 ft / in | | CHECKED - | REVISED - |
| PLOT DATE = Sep-30-2011 02:13:49PM | | DATE - | REVISED - |

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

| SIGN PANEL DETAILS | | | |
|--------------------|---------------------|------|---------|
| SCALE: | SHEET NO. OF SHEETS | STA. | TO STA. |

| F.A. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|--------------------|------------------------|----------|---------------------------|-----------|
| LAB | D-6_OVDSTNSIGREEL12-23 | SANGAMON | 33 | 26 |
| CONTRACT NO. 46196 | | | ILLINOIS FED. AID PROJECT | |