

**MAINTENANCE SCHEDULE**

1. SILT FENCE - AT A MINIMUM, THE CONTRACTOR SHALL INSPECT ALL SILT FENCE WEEKLY OR AFTER EACH ONE-HALF INCH OR GREATER RAINFALL EVENT. ANY REQUIRED REPAIRS SHALL BE MADE BY THE CONTRACTOR TO KEEP THE SILT FENCE FUNCTIONAL AS DESIGNED.
2. HEAVY DUTY EROSION BLANKET - AT A MINIMUM, THE CONTRACTOR SHALL INSPECT ALL EROSION BLANKET WEEKLY OR AFTER EACH ONE-HALF INCH OR GREATER RAINFALL EVENT. ANY REQUIRED REPAIRS SHALL BE MADE BY THE CONTRACTOR TO KEEP THE HEAVY DUTY EROSION BLANKET FUNCTIONAL AS DESIGNED.
3. TEMPORARY DITCH CHECKS - AT A MINIMUM, THE CONTRACTOR SHALL INSPECT ALL TEMPORARY DITCH CHECKS WEEKLY OR AFTER EACH ONE-HALF INCH OR GREATER RAINFALL EVENT. ANY REQUIRED REPAIRS SHALL BE MADE BY THE CONTRACTOR TO KEEP THE DITCH CHECK FUNCTIONAL AS DESIGNED.
4. THE EROSION CONTROL QUANTITIES PROVIDED IN THE PLANS ARE APPROXIMATE. THE ACTUAL NEED FOR QUANTITIES WILL BE DETERMINED IN THE FIELD BY THE ENGINEER AT THE TIME OF CONSTRUCTION.

**SOIL STABILIZATION CHART**

STABILIZATION TYPE	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
CLASS 4 NATIVE GRASS MIXTURE				██████████	██████████				██████████			
SEEDING, CLASS 7 (TEMPORARY SEED)			██████████	██████████	██████████	██████████	██████████	██████████	██████████	██████████		


MINIMUM SEEDING RATE OF APPLICATION CL 7 (114 LB/ACRE), CL 4A (38 LB/ACRE), CL 4B (38 LB/ACRE)

**LEGEND**

- PERIMETER EROSION BARRIER
- INLET FILTERS
- IPP
- INLET AND PIPE PROTECTION
- TEMPORARY DITCH CHECKS
- COFFERDAM OR ALTERNATIVE METHOD OF DEWATERING AS APPROVED BY THE ENGINEER (INCIDENTAL TO CONSTRUCTION)
- TEMPORARY EROSION CONTROL SEEDING HEAVY DUTY EROSION CONTROL BLANKET SEEDING CLASS 4 (TO BE PLACED ON SIDE SLOPES)
- WETLAND BOUNDARY
- STONE RIPRAP, CLASS A4 MIN. THICKNESS = 20 INCHES
- ORDINARY HIGH WATER MARK BOUNDARY

**CONSTRUCTION SEQUENCING FOR WINGWALL REPAIR**

1. INSTALL SEDIMENT AND EROSION CONTROL SYSTEMS.
2. REMOVE EXISTING STRUCTURE WITHOUT IMPACT OR DEBRIS ENTERING THE WATERWAY.
3. CONSTRUCT STRUCTURE EXCAVATION PROTECTION AND INSTALL STRUCTURE.
4. REMOVE EROSION CONTROL MEASURES AND RESTORE.

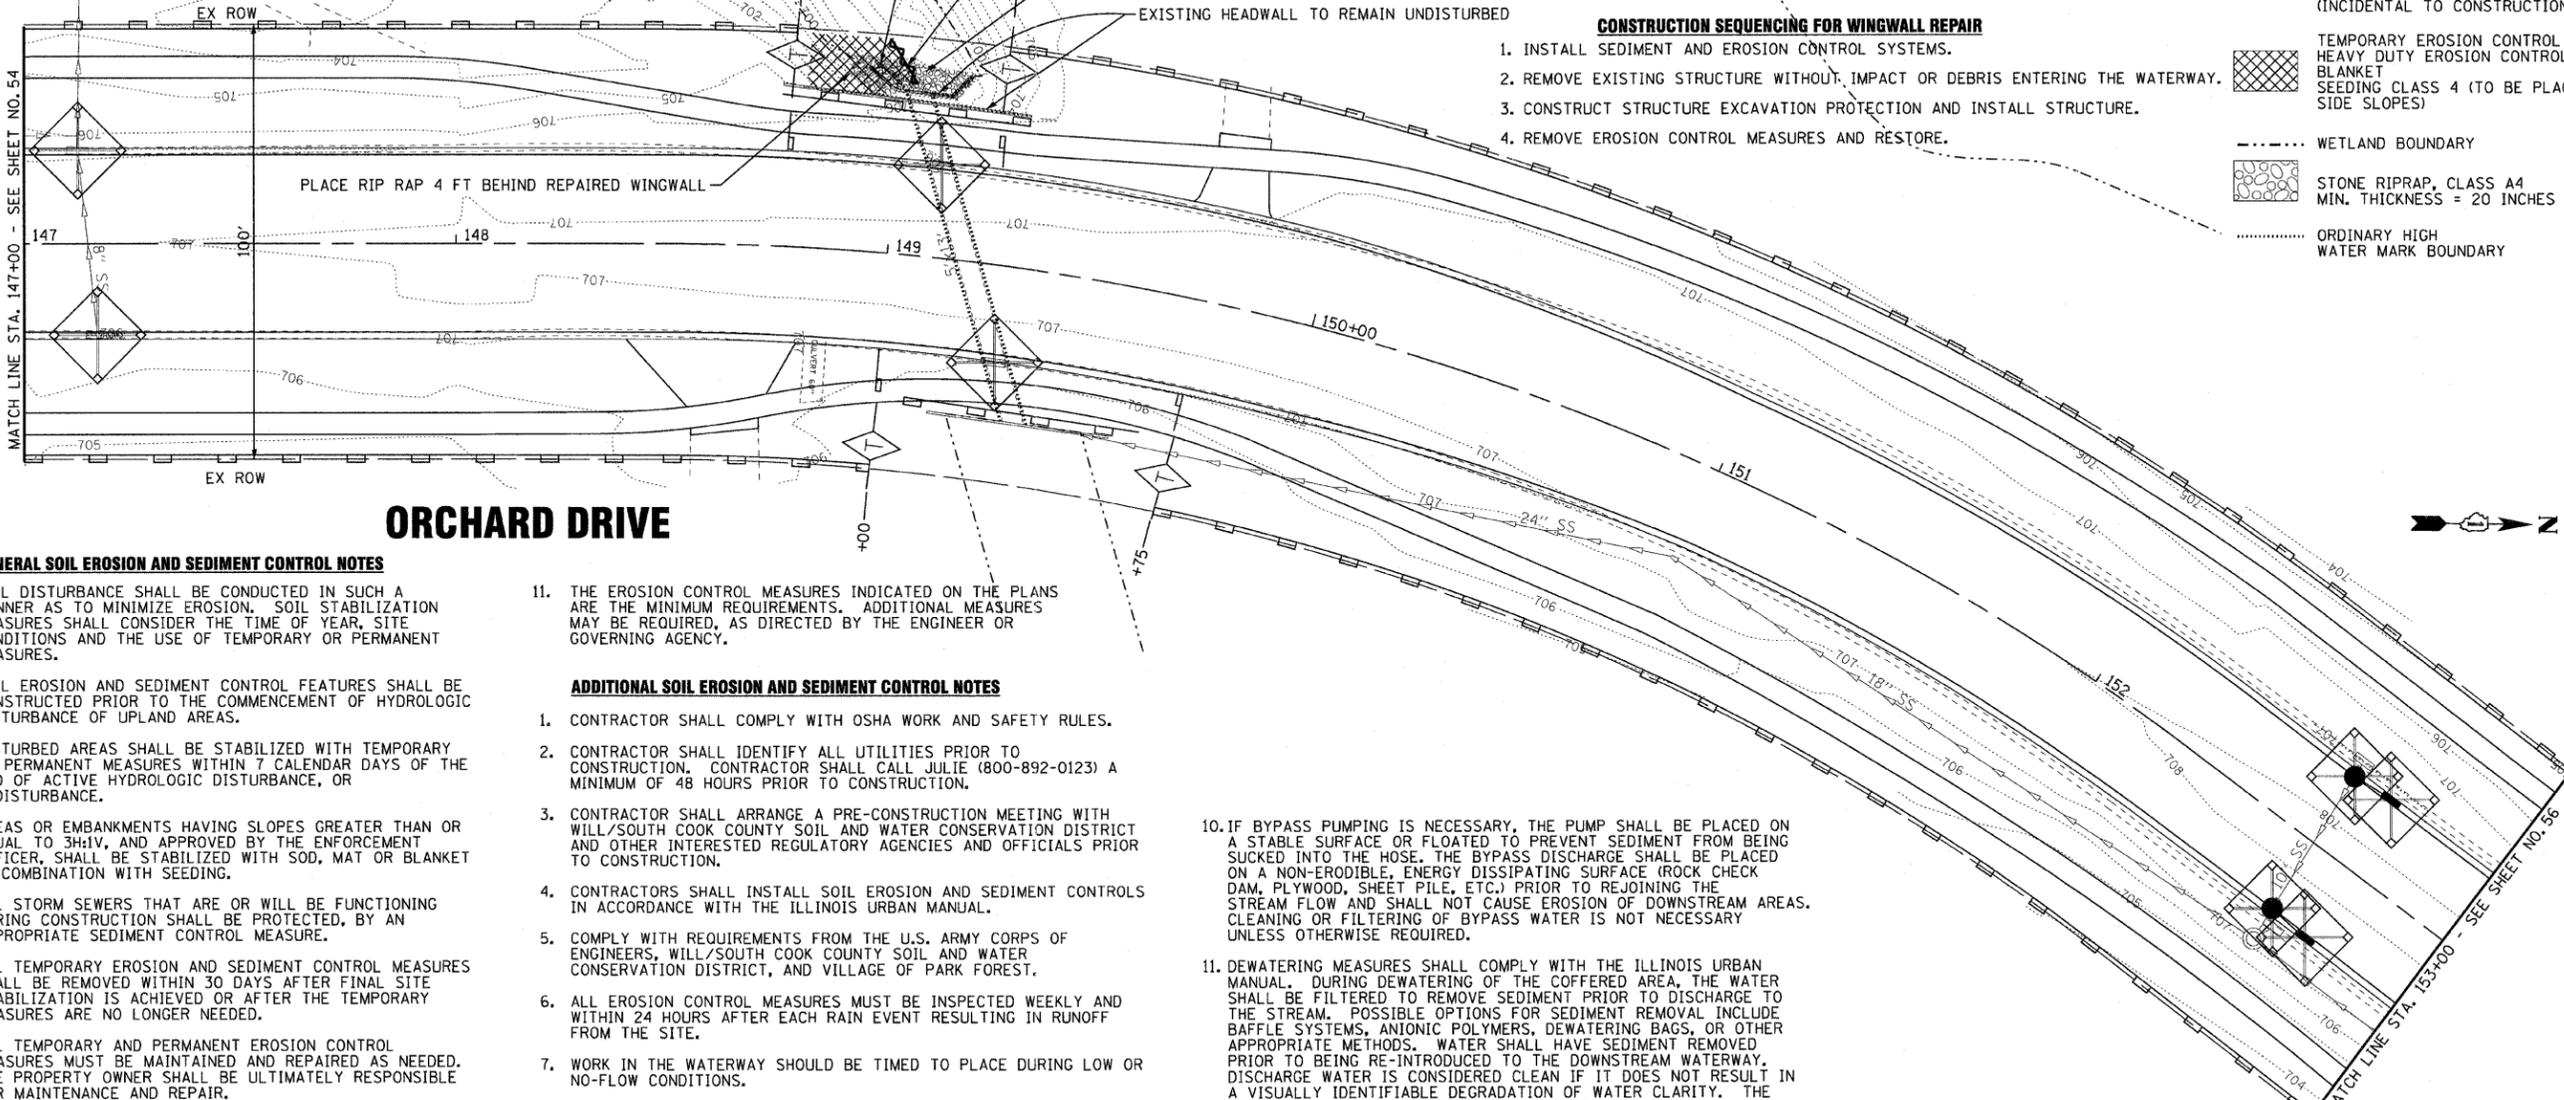

**ORCHARD DRIVE**

**GENERAL SOIL EROSION AND SEDIMENT CONTROL NOTES**

1. SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. SOIL STABILIZATION MEASURES SHALL CONSIDER THE TIME OF YEAR, SITE CONDITIONS AND THE USE OF TEMPORARY OR PERMANENT MEASURES.
2. SOIL EROSION AND SEDIMENT CONTROL FEATURES SHALL BE CONSTRUCTED PRIOR TO THE COMMENCEMENT OF HYDROLOGIC DISTURBANCE OF UPLAND AREAS.
3. DISTURBED AREAS SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT MEASURES WITHIN 7 CALENDAR DAYS OF THE END OF ACTIVE HYDROLOGIC DISTURBANCE, OR DEDISTURBANCE.
4. AREAS OR EMBANKMENTS HAVING SLOPES GREATER THAN OR EQUAL TO 3H:1V, AND APPROVED BY THE ENFORCEMENT OFFICER, SHALL BE STABILIZED WITH SOD, MAT OR BLANKET IN COMBINATION WITH SEEDING.
5. ALL STORM SEWERS THAT ARE OR WILL BE FUNCTIONING DURING CONSTRUCTION SHALL BE PROTECTED, BY AN APPROPRIATE SEDIMENT CONTROL MEASURE.
6. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED.
7. ALL TEMPORARY AND PERMANENT EROSION CONTROL MEASURES MUST BE MAINTAINED AND REPAIRED AS NEEDED. THE PROPERTY OWNER SHALL BE ULTIMATELY RESPONSIBLE FOR MAINTENANCE AND REPAIR.
8. A STABILIZED MAT OF AGGREGATE UNDERLAIN WITH FILTER CLOTH (OR OTHER APPROPRIATE MEASURE) SHALL BE LOCATED AT ANY POINT WHERE TRAFFIC WILL BE ENTERING OR LEAVING A CONSTRUCTION SITE TO OR FROM A PUBLIC RIGHT-OF-WAY, STREET, ALLEY OR PARKING AREA. ANY SEDIMENT OR SOIL REACHING AN IMPROVED PUBLIC RIGHT OF-WAY, STREET, ALLEY OR PARKING AREA SHALL BE REMOVED BY SCRAPPING OR STREET CLEANING AS ACCUMULATIONS WARRANT AND TRANSPORTED TO A CONTROLLED SEDIMENT DISPOSAL AREA.
9. SOIL STOCKPILES SHALL NOT BE LOCATED IN A FLOOD PRONE AREA, OVERLAND FLOW ROUTES, OR A DESIGNATED BUFFER PROTECTING WETLANDS OR STREAMS.
10. IF DEWATERING SERVICES ARE USED, ADJOINING PROPERTIES AND DISCHARGE LOCATIONS SHALL BE PROTECTED FROM EROSION. DISCHARGES SHALL BE ROUTED THROUGH AN EFFECTIVE SEDIMENT CONTROL MEASURE (e.g. SEDIMENT TRAP, SEDIMENT BASIN, OR OTHER APPROPRIATE MEASURE).

11. THE EROSION CONTROL MEASURES INDICATED ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL MEASURES MAY BE REQUIRED, AS DIRECTED BY THE ENGINEER OR GOVERNING AGENCY.

**ADDITIONAL SOIL EROSION AND SEDIMENT CONTROL NOTES**

1. CONTRACTOR SHALL COMPLY WITH OSHA WORK AND SAFETY RULES.
2. CONTRACTOR SHALL IDENTIFY ALL UTILITIES PRIOR TO CONSTRUCTION. CONTRACTOR SHALL CALL JULIE (800-892-0123) A MINIMUM OF 48 HOURS PRIOR TO CONSTRUCTION.
3. CONTRACTOR SHALL ARRANGE A PRE-CONSTRUCTION MEETING WITH WILL/SOUTH COOK COUNTY SOIL AND WATER CONSERVATION DISTRICT AND OTHER INTERESTED REGULATORY AGENCIES AND OFFICIALS PRIOR TO CONSTRUCTION.
4. CONTRACTORS SHALL INSTALL SOIL EROSION AND SEDIMENT CONTROLS IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL.
5. COMPLY WITH REQUIREMENTS FROM THE U.S. ARMY CORPS OF ENGINEERS, WILL/SOUTH COOK COUNTY SOIL AND WATER CONSERVATION DISTRICT, AND VILLAGE OF PARK FOREST.
6. ALL EROSION CONTROL MEASURES MUST BE INSPECTED WEEKLY AND WITHIN 24 HOURS AFTER EACH RAIN EVENT RESULTING IN RUNOFF FROM THE SITE.
7. WORK IN THE WATERWAY SHOULD BE TIMED TO PLACE DURING LOW OR NO-FLOW CONDITIONS.
8. WING WALL REPAIR WORK SHALL BE CONDUCTED IN-THE-DRY. STREAM FLOW MUST BE ISOLATED FROM THE WORK AREA USING A NON-ERODIBLE COFFERDAM (STEEL SHEETS, PRE-FABRICATED RIGID COFFERDAMS, INFLATABLE BLADDERS, SAND BAGS, ETC.). EXACT MEANS AND METHODS SHOULD BE DISCUSSED DURING THE SCHEDULED PRE-CONSTRUCTION MEETING.
9. WORK MAY NOT BE PERFORMED IN THE WATER, EXCEPT FOR THE PLACEMENT OF THE MATERIALS NECESSARY FOR THE CONSTRUCTION OF THE COFFERDAM. THE COFFERDAM MUST BE CONSTRUCTED FROM THE UPLAND AREA AND NO EQUIPMENT MAY ENTER THE WATER AT ANY TIME. ONCE THE COFFERDAM IS IN PLACE AND THE ISOLATED AREA IS DEWATERED, EQUIPMENT MAY ENTER THE COFFERED AREA TO PERFORM THE REQUIRED WORK.
10. IF BYPASS PUMPING IS NECESSARY, THE PUMP SHALL BE PLACED ON A STABLE SURFACE OR FLOATED TO PREVENT SEDIMENT FROM BEING SUCKED INTO THE HOSE. THE BYPASS DISCHARGE SHALL BE PLACED ON A NON-ERODIBLE, ENERGY DISSIPATING SURFACE (ROCK CHECK DAM, PLYWOOD, SHEET PILE, ETC.) PRIOR TO REJOINING THE STREAM FLOW AND SHALL NOT CAUSE EROSION OF DOWNSTREAM AREAS. CLEANING OR FILTERING OF BYPASS WATER IS NOT NECESSARY UNLESS OTHERWISE REQUIRED.
11. DEWATERING MEASURES SHALL COMPLY WITH THE ILLINOIS URBAN MANUAL. DURING DEWATERING OF THE COFFERED AREA, THE WATER SHALL BE FILTERED TO REMOVE SEDIMENT PRIOR TO DISCHARGE TO THE STREAM. POSSIBLE OPTIONS FOR SEDIMENT REMOVAL INCLUDE BAFFLE SYSTEMS, ANIONIC POLYMERS, DEWATERING BAGS, OR OTHER APPROPRIATE METHODS. WATER SHALL HAVE SEDIMENT REMOVED PRIOR TO BEING RE-INTRODUCED TO THE DOWNSTREAM WATERWAY. DISCHARGE WATER IS CONSIDERED CLEAN IF IT DOES NOT RESULT IN A VISUALLY IDENTIFIABLE DEGRADATION OF WATER CLARITY. THE DISCHARGE FROM THE DEWATERING DEVICE SHALL NOT CAUSE EROSION.
12. THE SIDE SLOPES MUST BE RESEEDED AND STABILIZED IMMEDIATELY AFTER FINAL GRADING WITH AN APPROPRIATE EROSION CONTROL BLANKET PRIOR TO ACCEPTING FLOWS. THE BOTTOM OF THE CHANNEL MUST BE BROUGHT BACK TO ITS ORIGINAL GRADE AND STABLE ENOUGH TO ACCEPT FLOWS.
13. STOCKPILES OF SOIL AND OTHER BUILDING MATERIALS TO REMAIN IN PLACE FOR MORE THAN THREE DAYS SHALL BE FURNISHED WITH EROSION AND SEDIMENT CONTROL MEASURES IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL.
14. IF CONCRETE IS REQUIRED FOR WORK, CONCRETE WASHOUT FACILITIES SHALL BE INSTALLED, OPERATED AND MAINTAINED IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL.
15. ALL ADJACENT ROADWAYS MUST BE KEPT CLEAR OF DEBRIS, INSPECTED DAILY AND CLEANED WHEN NECESSARY.

16. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN AND STORMWATER POLLUTION PREVENTION PLAN SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.
17. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION AS DETERMINED BY THE OWNER OR APPLICABLE REGULATORY AGENCY.
18. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO INFORM ANY SUB-CONTRACTOR(S) WHO MAY PERFORM WORK ON THIS PROJECT OF THE REQUIREMENTS IN IMPLEMENTING AND MAINTAINING THESE EROSION CONTROL PLANS AND ALL PERMITS.
19. FINAL ACCEPTANCE OF PROJECT WILL BE CONTINGENT ON RECORD DRAWING APPROVAL BY THE ENGINEER.

COPYRIGHT © 2011 BY BAXTER & WOODMAN, INC.  
 STATE OF ILLINOIS - PROFESSIONAL DESIGN FIRM  
 LICENSE NO. - 84-0027-208  
 315 W. WASHINGTON ST., SUITE 200, CHICAGO, IL 60601-1000  
 TEL: 312.580.1100 FAX: 312.580.1101



DESIGNED - TLH	REVISED -
DRAWN - MAC	REVISED -
CHECKED - TAO	REVISED -
DATE - 10/31/11	FILE - 060670-PH2-ER3A.sht

**STATE OF ILLINOIS  
ORCHARD DRIVE IMPROVEMENTS**

**EROSION CONTROL PLAN  
ORCHARD DRIVE**

SCALE: 1" = 20'

STA. 147+00 TO STA. 153+00

F.A.U. RTE. 2836	SECTION 06-00090-00-FP	COUNTY COOK	TOTAL SHEETS 200	SHEET NO. 55
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT M-8003661			CONTRACT NO. 63635	