



SURVEYED BY: _____ DATE: _____
 PLOTTED BY: _____
 CHECKED BY: _____
 DATE: _____
 FILE NAME: _____
 PROJECT: _____
 DRAWN BY: _____
 CHECKED BY: _____
 DATE: _____
 REVISIONS: _____
 CONTRACT NO. 63655

CHRISTOPHER B. BURKE ENGINEERING LTD.
 9575 West Higgins Road, Suite 600
 Rosemont, Illinois 60018
 (847) 823-0500

MATCH LINE STA. 130+00

MATCH LINE STA. 135+00

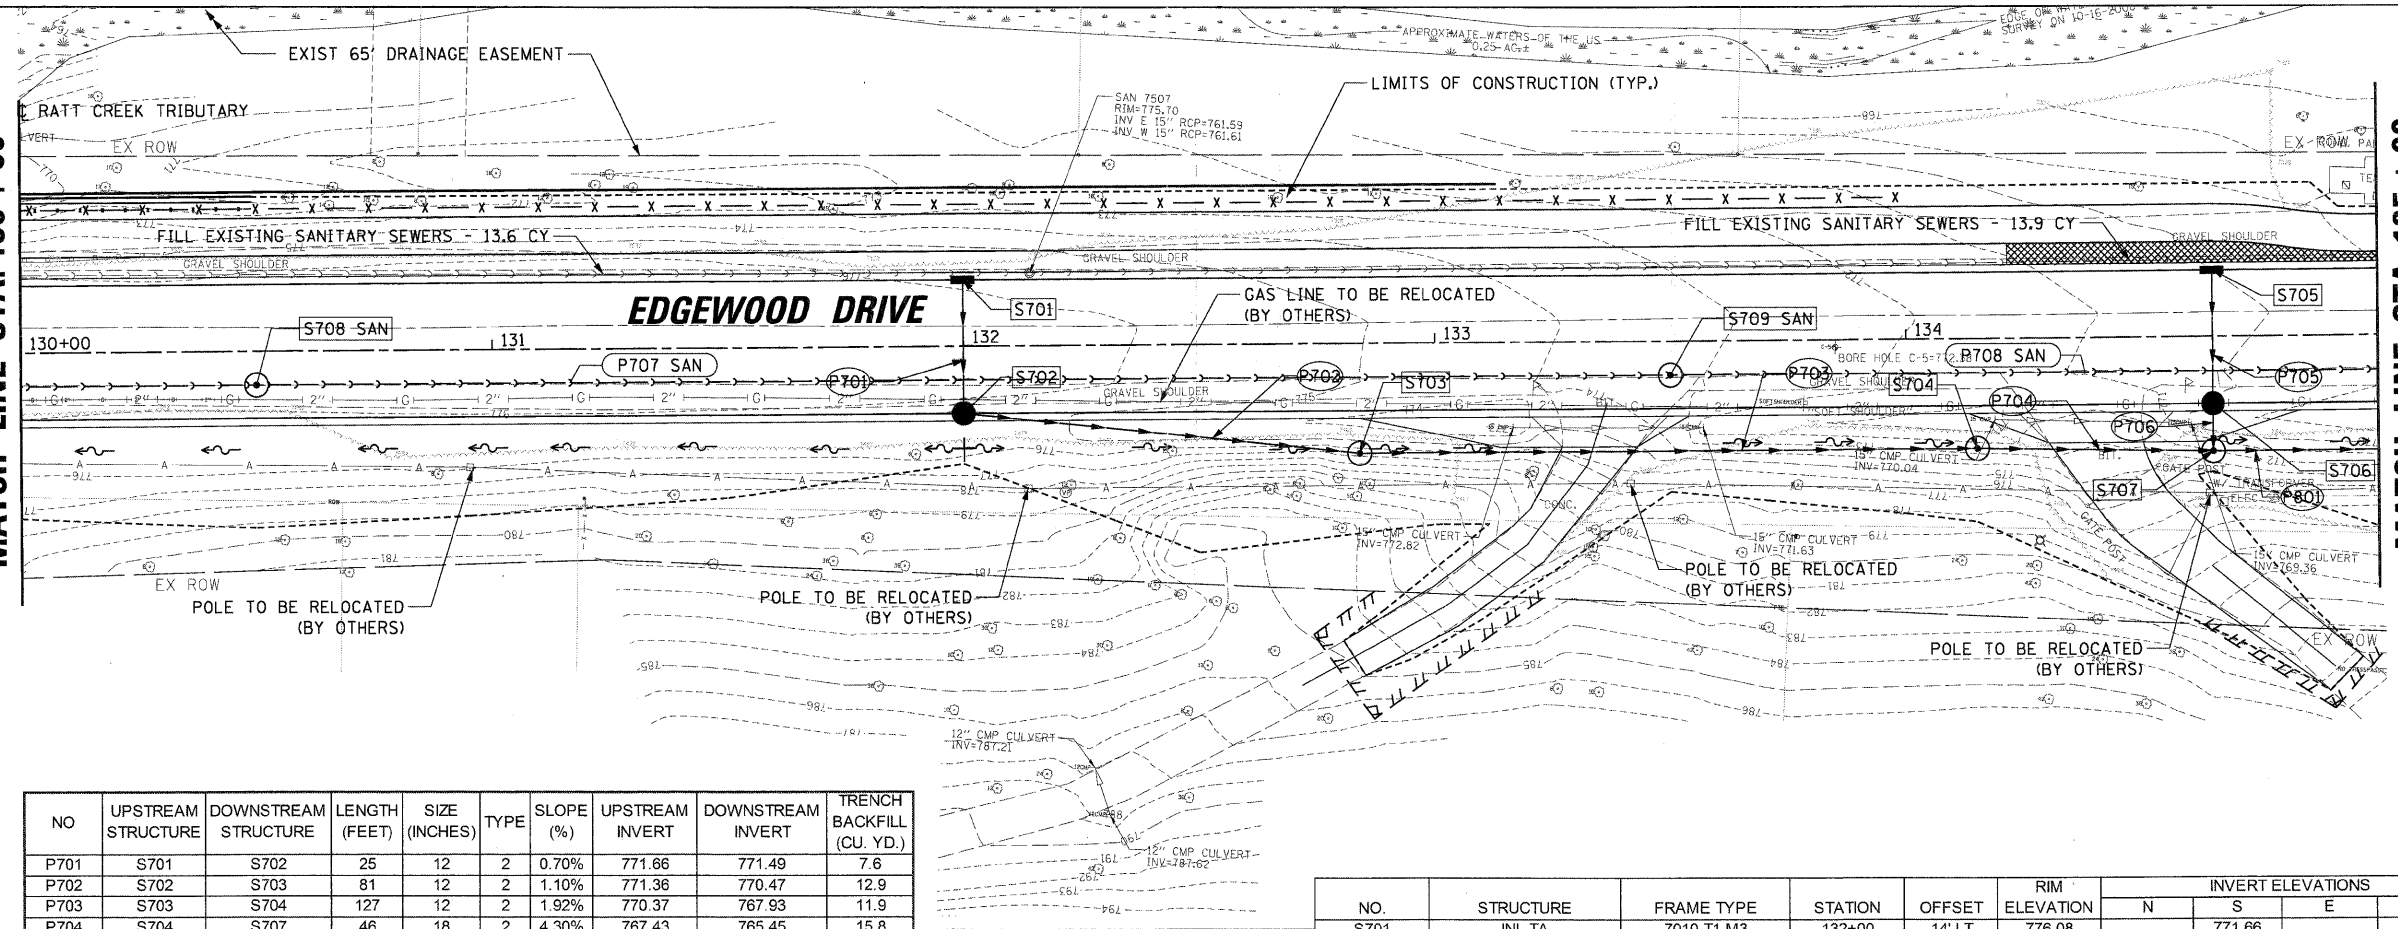

NO	UPSTREAM STRUCTURE	DOWNSTREAM STRUCTURE	LENGTH (FEET)	SIZE (INCHES)	TYPE	SLOPE (%)	UPSTREAM INVERT	DOWNSTREAM INVERT	TRENCH BACKFILL (CU. YD.)
P701	S701	S702	25	12	2	0.70%	771.66	771.49	7.6
P702	S702	S703	81	12	2	1.10%	771.36	770.47	12.9
P703	S703	S704	127	12	2	1.92%	770.37	767.93	11.9
P704	S704	S707	46	18	2	4.30%	767.43	765.45	15.8
P705	S705	S706	26	12	2	0.70%	766.31	766.13	6.5
P706	S706	S707	7	12	2	0.70%	766.03	765.98	2.3
P707 SAN	S708 SAN	S709 SAN	296	8		0.76%	762.62	760.38	543.0
P708 SAN	S709 SAN	S808 SAN	296	8		2.96%	760.31	751.54	522.0

NO.	STRUCTURE	FRAME TYPE	STATION	OFFSET	RIM ELEVATION	INVERT ELEVATIONS			
						N	S	E	W
S701	INL TA	7010-T1-M3	132+00	14' LT	776.08		771.66		
S702	CB TA 4'	7010-T1-M3	132+00	14' RT	776.08	771.49		771.36	
S703	MH TA 4'	6508	132+84	23' RT	775.09			770.37	770.47
S704	MH TA 4'	6508	134+15	23' RT	770.94			767.93	767.43
S705	INL TA	7010-T1-M3	134+65	14' LT	770.2		766.31		
S706	CB TA 4'	7010-T1-M3	134+65	14' RT	770.2	766.13	766.03		
S707	MH TA 4'	6508	134+65	24' RT	771.33	765.98		765.35	765.45
S708 SAN	MH TA 4' (SAN)	1050-Z1-CL	130+50	7' RT	776.97			762.62	762.65
S709 SAN	MH TA 4' (SAN)	1050-Z1-CL	133+50	7' RT	773.75			760.31	760.38

