



NOTE:
1. SEE SHEET 263 FOR REMOVALS.

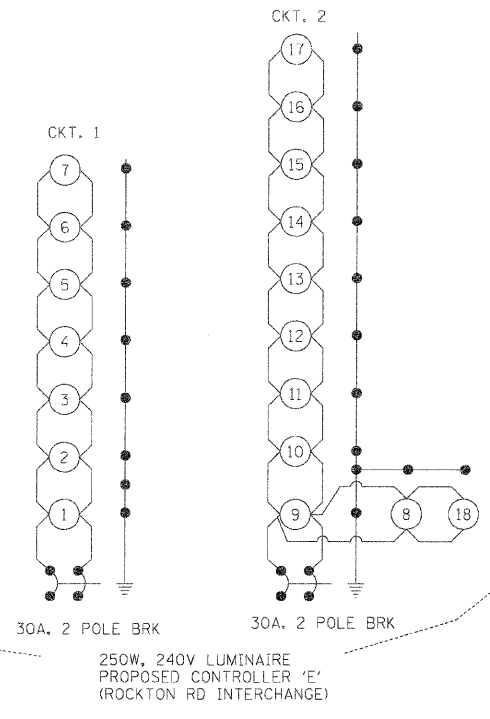

- EXISTING LIGHTING CONTROLLER 'E'
30A, 240/480V, 1 PHASE
- PROPOSED LIGHTING CONTROLLER 'E'
60A, 120/240V, 1 PHASE
- LEGEND:
- EXISTING UNIT DUCT, TO BE REMOVED UNLESS NOTED OTHERWISE
 - - - PROPOSED UNIT DUCT
 - CONDUIT PUSHED, 4" DIA., PVC SCHEDULE 80 (PAID AS UNDERGROUND CONDUIT, PVC, 4" DIA.)
 - EXISTING LIGHT POLE TO REMAIN UNLESS NOTED OTHERWISE
 - EXISTING LIGHTING CONTROLLER
 - PROPOSED LIGHTING CONTROLLER
 - PROPOSED LIGHT POLE, WEATHERING STEEL, 45 FT. M.H., TENON MOUNT WITH (1) 250W HPS MM VAPOR FIXTURE
 - PROPOSED LIGHT POLE, WEATHERING STEEL, 45 FT. M.H., (1) 250W HPS VAPOR FIXTURE WITH 15 FT MAST ARM
 - PROPOSED HAND HOLE
 - PROPOSED SIGNAL/LIGHT COMBO POLE (SEE SIGNAL SHEETS)
 - 2 UNIT DUCT, 600V, 2-1C NO.2, 1/C NO.2 GROUND, (XLP-TYPE USE), 1/4" DIA. POLYETHYLENE
 - 3 UNIT DUCT, 600V, 4-1C NO.2, 1C NO.4 GROUND, (XLP-TYPE USE), 1/2" DIA. POLYETHYLENE
 - 10 UNIT DUCT, 600V, 2-1C NO.4, 1/C NO.4 GROUND, (XLP-TYPE USE), 1" DIA. POLYETHYLENE



	USER NAME = _USERNAME_	DESIGNED - BLM	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LIGHTING PLAN ROCKTON RD EXIT RAMP		F.A.I. RTE. 90	SECTION (X2-1)R	COUNTY WINNEBAGO	TOTAL SHEETS 510	SHEET NO. 273	
	PLOT SCALE = 52.0000' / IN.	CHECKED - BLM	REVISED -		SCALE:	SHEET NO. OF SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT CONTRACT NO. 64C29				
	PLOT DATE = 10/25/2011	DATE - 10/14/11	REVISED -									