


R10-3E SIGN SCHEDULE			
COUNTY	CITY	INTERSECTION	NUMBER OF R10-3E SIGNS REQUIRED
GRUNDY	COAL CITY	IL 113 & BROADWAY ST.	8
	COAL CITY	IL 113 & GARFIELD ST.	4
	MORRIS	US 6 (BEDFORD RD.) & IL 47 (DIVISION ST.) (SOUTH JUNCTION)	4
	MORRIS	US 6 & IL 47 (DIVISION ST.) (NORTH JUNCTION)	2
	MORRIS	IL 47 (DIVISION ST.) & GEORGE ST.	6
	MORRIS	US 6 & LISBON RD.	8
	MORRIS	IL 47 & GORE RD.	4
	MORRIS	IL 47 & I-80 NORTH RAMP	2
	MORRIS	IL 47 & I-80 SOUTH RAMP	2
	MORRIS	IL 47 & PINE BLUFF RD.	2
KENDALL	PLANO	US 34 & LITTLE ROCK RD	2
LIVINGSTON	PONTIAC	IL 116 (HOWARD ST.) & ELM ST.	8
TOTAL			52

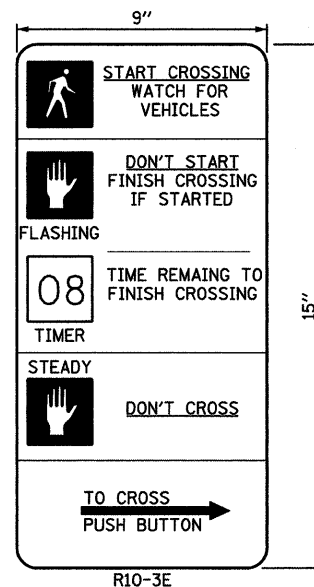

THE CONTRACTOR SHALL SUPPLY AND MOUNT ONE SIGN AT EACH EXISTING PEDESTRIAN PUSH-BUTTON AND THIS SHALL BE INCLUDED IN THE COST OF PEDESTRIAN SIGNAL HEAD PAY ITEM.

TRAFFIC SIGNAL GENERAL NOTES

- THE CONTRACTOR SHALL CONTACT THE APPROPRIATE CITY A MINIMUM OF 72 HOURS PRIOR TO BEGINNING WORK.
 - A. GIBSON CITY 815-784-5872
 - B. PAXTON 217-379-4022
 - C. COAL CITY 815-634-8608
 - D. MORRIS 815-942-0103
 - E. OSWEGO 630-554-3618
 - F. PLANO 630-552-8275
 - G. YORKVILLE 630-553-4350
 - H. FAIRBURY 815-692-2743
 - I. PONTIAC 815-844-6752
- THE TRAFFIC SIGNAL SECTION AT THE ILLINOIS DEPARTMENT OF TRANSPORTATION, DISTRICT 3, SHALL BE NOTIFIED AT 815-434-8506 AT LEAST 72 HOURS PRIOR TO TURNING ON ANY FLASHER OR CONTROLLER UNITS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING UTILITY PROPERTY DURING CONSTRUCTION OPERATIONS AS OUTLINED IN ARTICLE 107.31 OF THE STANDARD SPECIFICATIONS. A MINIMUM OF 48 HOURS ADVANCED NOTICE IS REQUIRED FOR NON-EMERGENCY WORK. THE JULIE NUMBER IS 800-892-0123.
- ALL TRAFFIC CONTROL AND OTHER ADVISORY SIGNS NEEDED FOR CONSTRUCTION ARE TO BE FURNISHED BY THE CONTRACTOR IN ACCORDANCE WITH SECTION 701 OF THE STANDARD SPECIFICATIONS.
- ALL TRAFFIC SIGNAL HEADS SHALL BE 12-INCH POLYCARBONATE.
- TRAFFIC SIGNAL HEADS SHALL BE PROPERLY COVERED PRIOR TO INTERSECTION TURN-ON OR AS DIRECTED BY THE ENGINEER. THIS COST SHALL BE INCLUDED WITH THE COST OF THE ASSOCIATED TRAFFIC SIGNAL PAY ITEMS.
- ALL THREADS OF BOLTS USED IN THE ASSEMBLY OF TRAFFIC SIGNAL COMPONENTS SHALL BE COATED WITH A NON-LEAD BASED ANTI-SEIZE COMPOUND, SIMILAR TO LEAD PLATE, PRIOR TO ASSEMBLY.
- ALL HARDWARE SHALL BE TIGHTENED AND WELL SECURED; CABLES SHALL BE NEATLY WOUND IN HANDHOLES. CABLES SHALL BE NEATLY TRAINED IN THE CONTROLLER CABINET.
- ALL UNINTERRUPTIBLE POWER SUPPLIES SHALL BE EQUIPPED WITH ALPHA GUARD MONITORS.
- CONTRACTOR PERSONNEL AND EQUIPMENT SHALL NOT BE LOCATED WITHIN 50' OF THE CENTERLINE OF ANY RAILROAD TRACK.

APPROVED PROVIDERS FOR LED SIGNAL MODULES ARE:
GENERAL ELECTRIC
DIALIGHT

SEE TABLE FOR PART NUMBERS

DIALIGHT		DIALIGHT	
	PART NO.		PART NO.
RED BALL	433-1210-003XL 433-1270-003XL	RED ARROW	432-1314-001XOD 432-1374-001XOD
YELLOW BALL	433-3230-901XL 433-3270-901XL	YELLOW ARROW	431-3334-901XOD 431-3374-901XOD
GREEN BALL	433-2220-001XL 433-2270-001XL	GREEN ARROW	432-2324-001XOD 432-2374-001XOD
COUNTDOWN PEDESTRIAN	430-6479-001X		

GENERAL ELECTRIC

GENERAL ELECTRIC		GENERAL ELECTRIC	
	PART NO.		PART NO.
RED BALL	DR6-RTFB-77A DR6-RCFB-77A	RED ARROW	DR6-RTAAN-17A
YELLOW BALL	DR6-YTFB-77A DR6-YCFB-77A	YELLOW ARROW	DR6-YTAAN-17A DR6-YTAAN-17A-YX
GREEN BALL	DR6-GTFB-77A DR6-GCFB-77A	GREEN ARROW	DR6-GTAAN-17A DR6-GCAAN-17A
COUNTDOWN PEDESTRIAN	PS7-CFF1-26A-J PS7-CFF1-46A-J		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

REVIEWED BY: Gene A. Wucher
DISTRICT OPERATIONS ENGINEER

DATE: OCTOBER 28, 2011

EXAMINED BY: Heidi Gray
DISTRICT CONSTRUCTION ENGINEER

Wayne Phillips
DISTRICT MATERIALS ENGINEER

Don Berman
DISTRICT STUDIES & PLANS ENGINEER