


S. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1300	58RS-5	COOK	33	20
STA.	TO STA.			
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

CONTRACT # 62701

SCHEDULE OF QUANTITIES

QUANTITY	UNIT	ITEM
8	EACH	INDUCTION LOOP DETECTOR AMPLIFIER WITH SYSTEM OUTPUT
1	EACH	MASTER CONTROLLER
90	LIN. FT.	GALVANIZED STEEL CONDUIT IN TRENCH 1
903	LIN. FT.	ELECTRIC CABLE IN CONDUIT NO. 18 3 PAIR TWISTED, SHIELDED
827	LIN. FT.	PULL ELECTRIC CABLE FROM CONDUIT
1	EACH	DRILL EXISTING HANDHOLE
90	LIN. FT.	TRENCH AND BACKFILL

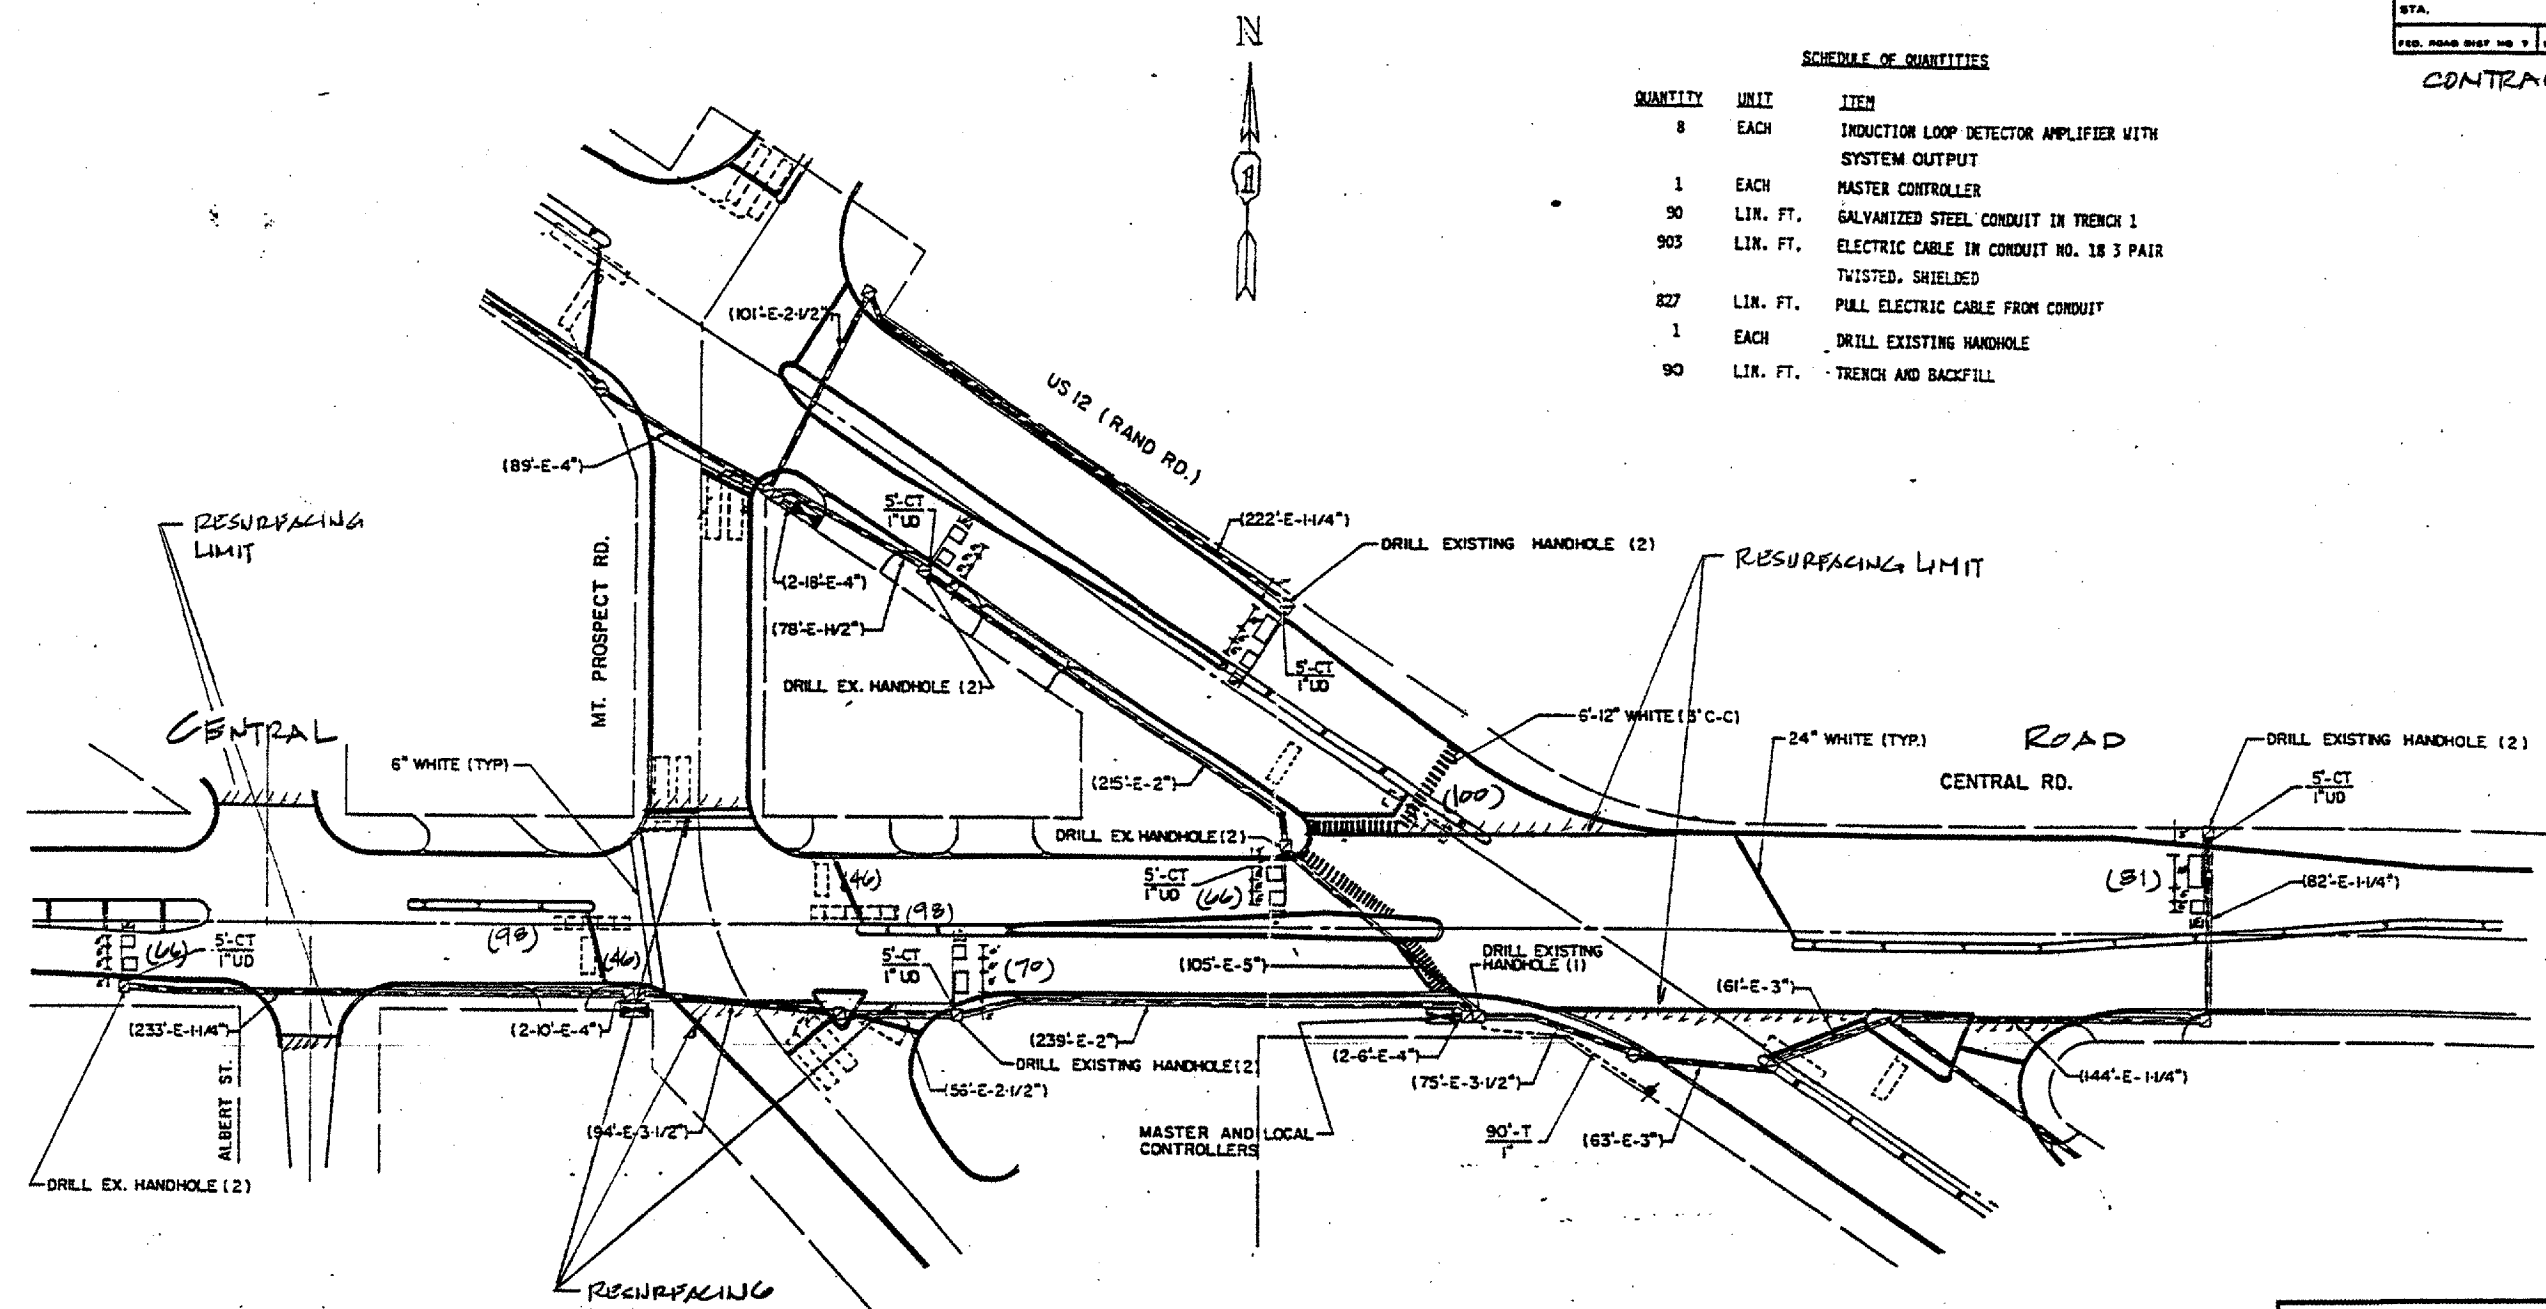

INTERCONNECT PLAN LEGEND

	NEW	EXISTING
CONTROLLER	[Symbol]	[Symbol]
HANDHOLE	[Symbol]	[Symbol]
DOUBLE HANDHOLE	[Symbol]	[Symbol]
G.S. CONDUIT IN TRENCH OR PUSHD	[Symbol]	[Symbol]
DETECTOR LOOP	[Symbol]	[Symbol]
CURB TRENCH	[Symbol]	[Symbol]
WET DUCT	[Symbol]	[Symbol]
SYSTEM	[Symbol]	[Symbol]
INTERSECTION	[Symbol]	[Symbol]

NOTE:
THIS PLAN IS FOR THE PURPOSE OF REPLACING THE DETECTOR LOOPS ONLY. ALL OTHER INFORMATION SHOWN IS NOT RELATED AND WILL BE DISREGARDED.

REPLACE ALL DETECTOR LOOPS AS SHOWN
(WITHIN THE RESURFACING LIMITS)

CODE NO.	QUANTITY	UNIT	ITEM
86600600	671	Foot	Detector Loop Replacement

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
DETECTOR LOOP REPLACEMENT
CENTRAL ROAD @ MT. PROSPECT RD.
U.S. ROUTE 12 @ CENTRAL ROAD
SCALE: 1"=20'
DATE: APRIL, 04
DRAWN BY: _____
DESIGNED BY: _____
CHECKED BY: _____