
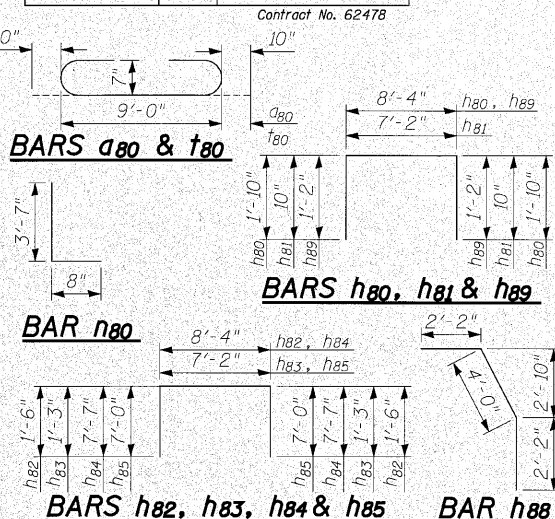
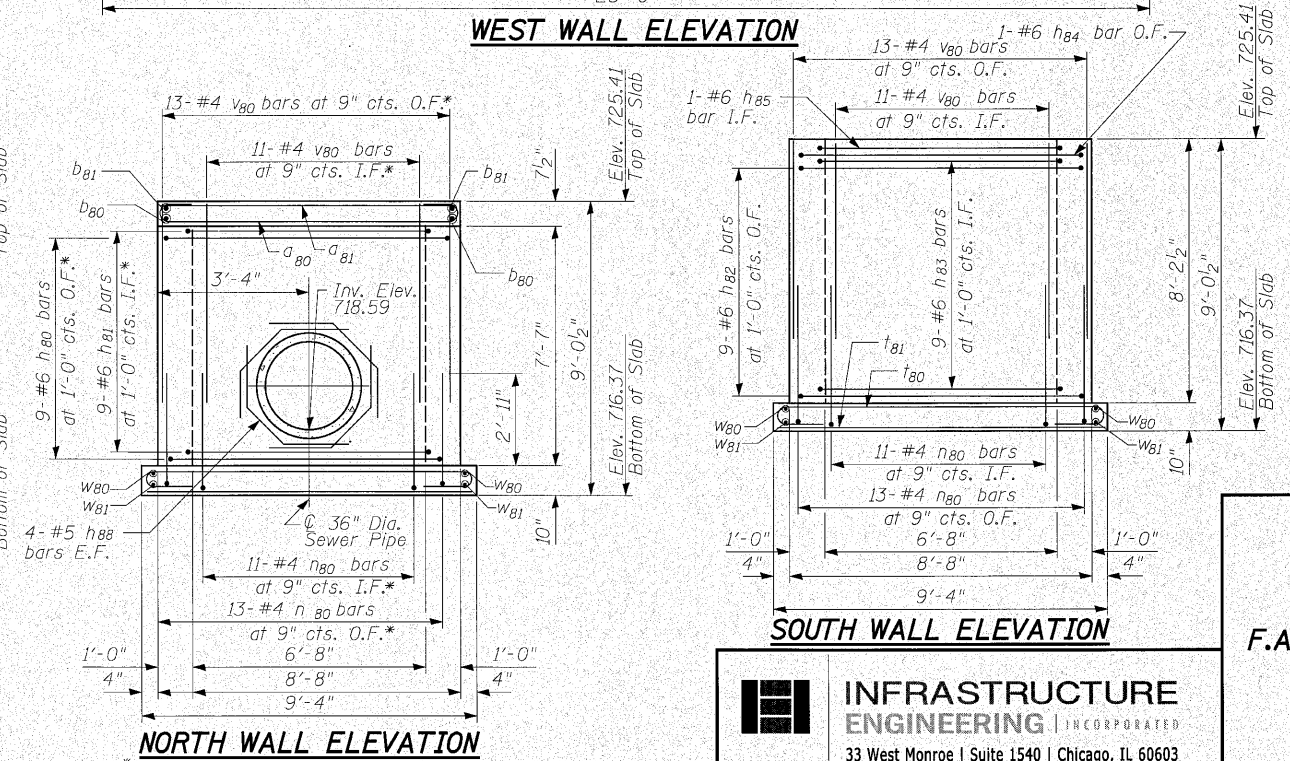
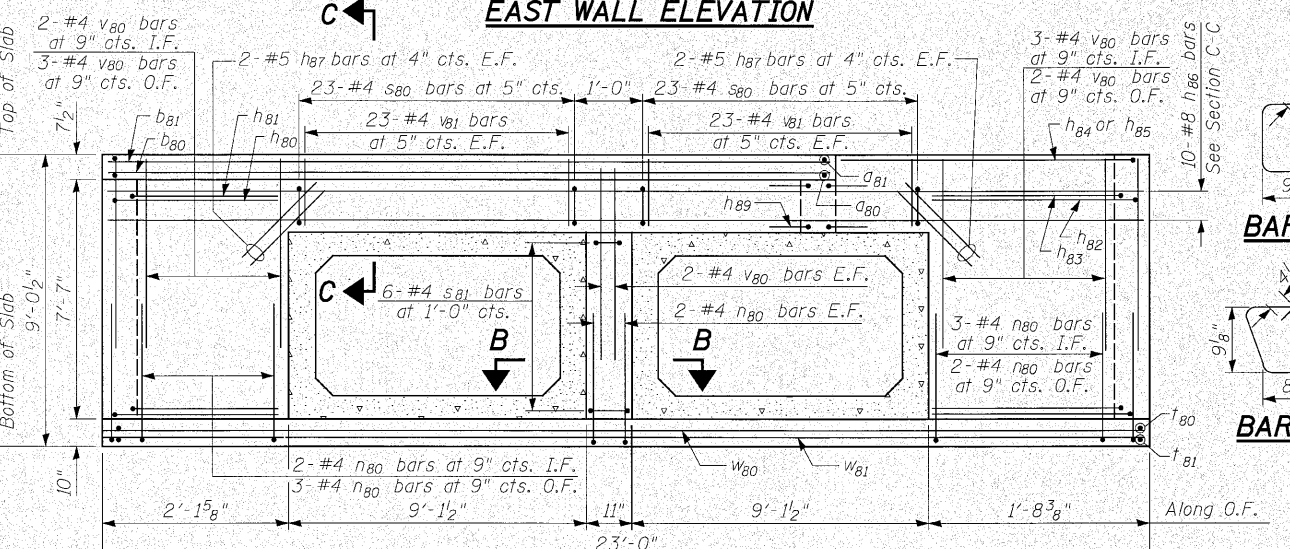
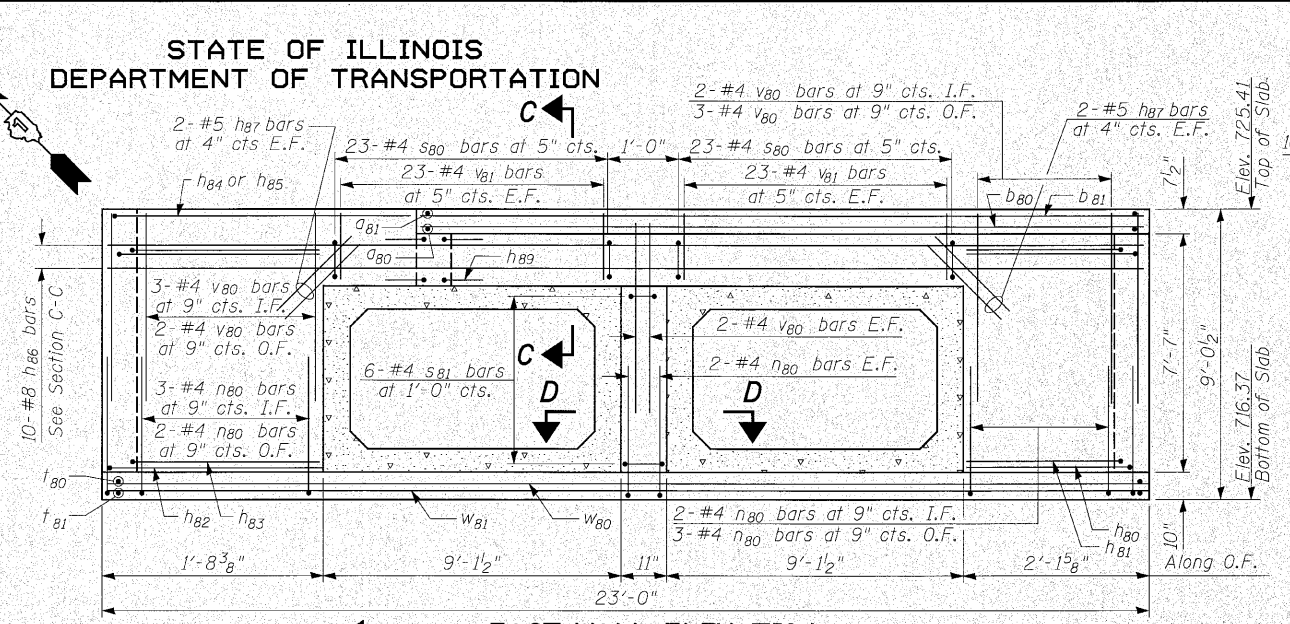
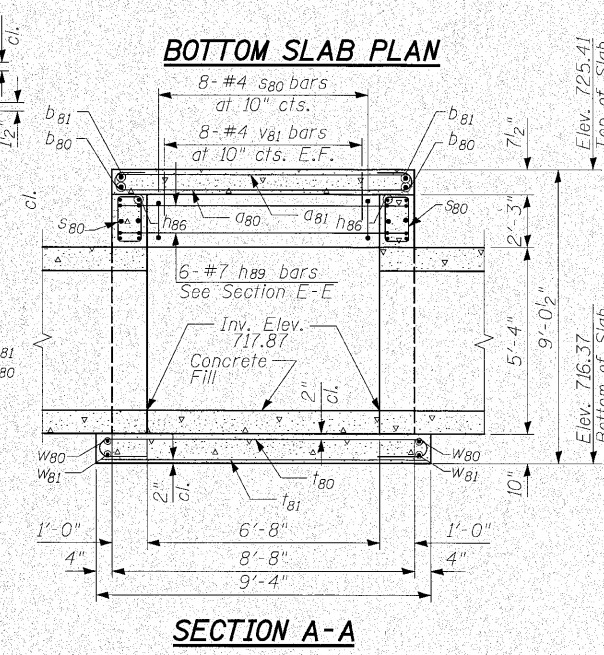
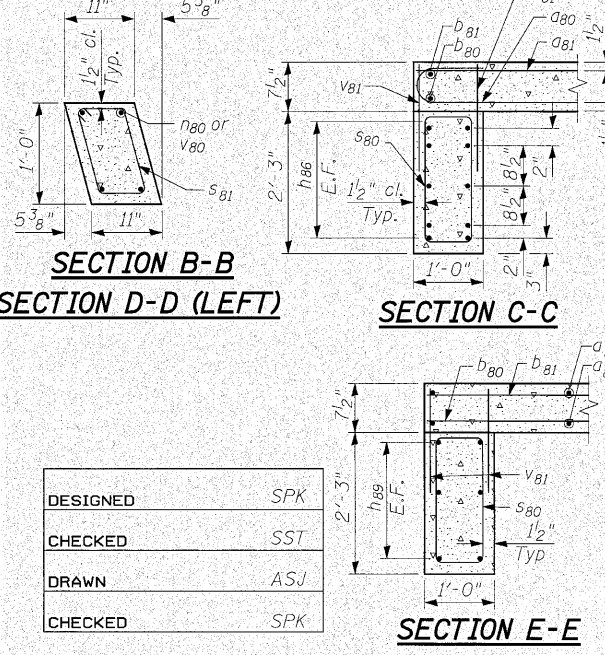


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	SHEET NO.	SHEET NO.
353	(12&13)WRS-4	Will	608	451
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT	Contract No. 62478

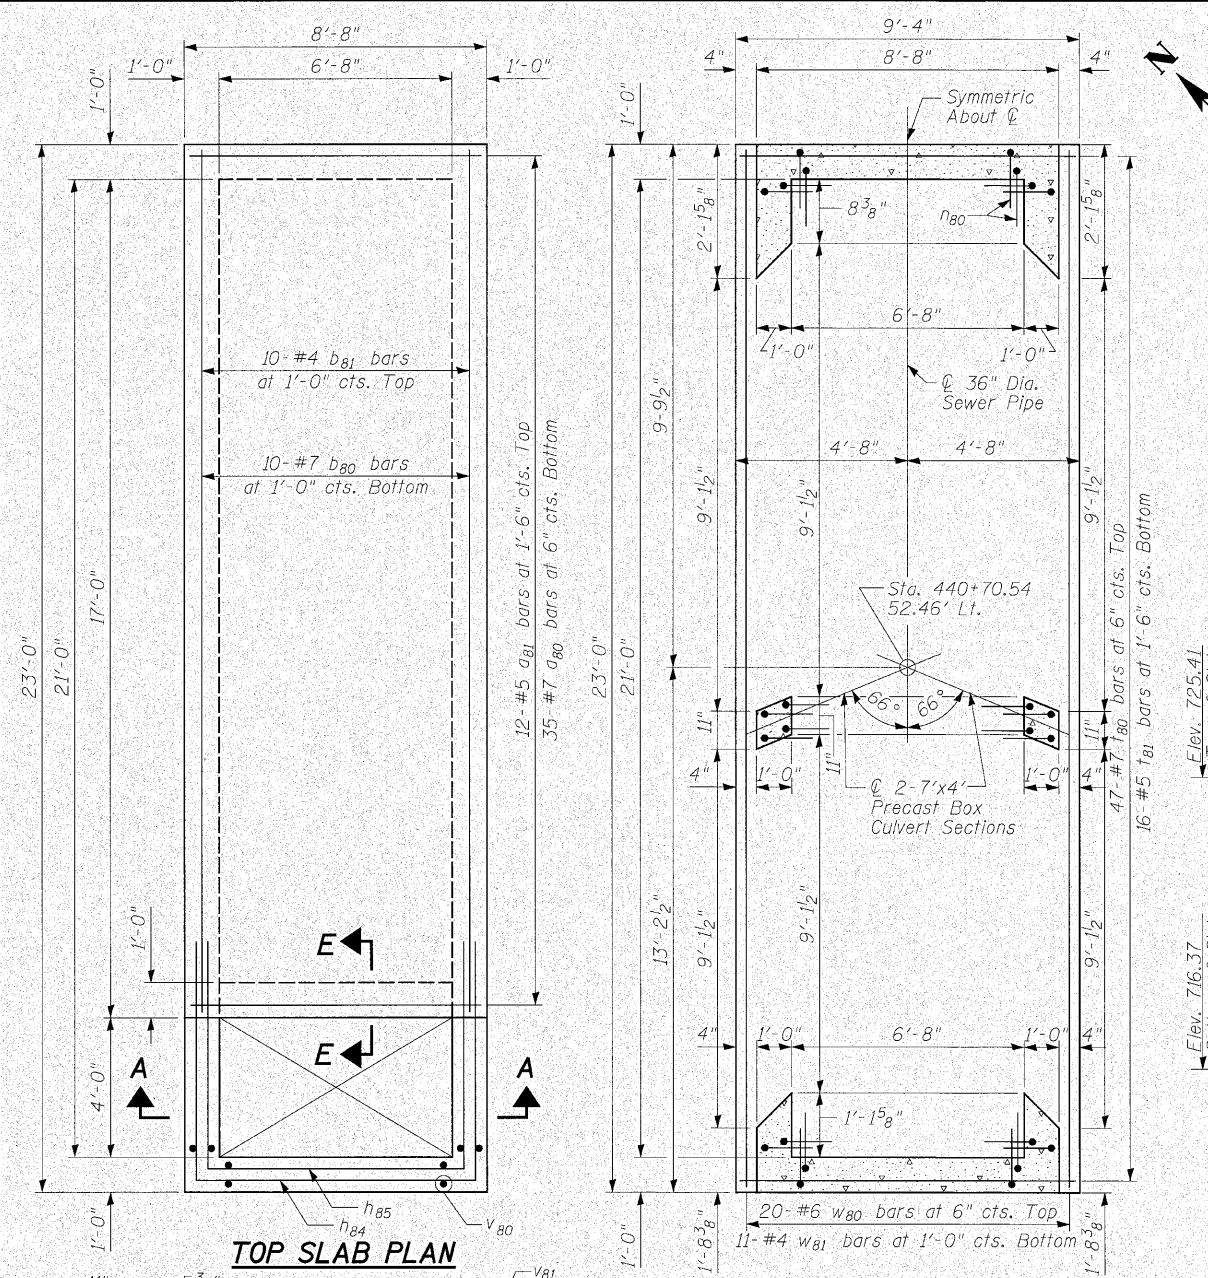

BILL OF MATERIAL

Bar	No.	Size	Length	Shape
a80	35	#7	10'-0"	C
a81	12	#5	8'-4"	—
b80	10	#7	17'-8"	—
b81	10	#4	17'-8"	—
h80	9	#6	12'-0"	—
h81	9	#6	8'-10"	—
h82	9	#6	11'-4"	—
h83	9	#6	9'-8"	—
h84	1	#6	23'-6"	—
h85	1	#6	21'-2"	—
h86	20	#8	22'-8"	—
h87	16	#5	2'-0"	—
h88	8	#5	8'-4"	—
h89	6	#7	10'-8"	—
n80	76	#4	4'-3"	—
s80	100	#4	6'-1"	—
s81	12	#4	3'-9"	—
t80	47	#7	10'-8"	C
t81	16	#5	9'-0"	—
v80	76	#4	6'-10"	—
v81	200	#4	1'-8"	—
w80	20	#6	22'-8"	—
w81	11	#4	22'-8"	—
Concrete Structures			Cu. Yd.	19.8
Reinforcement Bars			Pound	6,620

Note:
Quantity of Concrete Structures and Reinforcement Bars is shown for information only.

JUNCTION CHAMBER NO. 3
U.S. ROUTE 30 OVER
HICKORY CREEK TRIBUTARY 1
F.A.P. ROUTE 353 SEC. (12&13)WRS-4
WILL COUNTY
STATION 441+23.00
STRUCTURE NO. 099-4626

INFRASTRUCTURE ENGINEERING INCORPORATED
33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

P:\P-03\15095\Drawings\Final_Design\441+23.00\Drawings\Sheets\Culvert\441-sh12\103.dgn
 1:42:22 PM
 6/9/2010

DESIGNED	SPK
CHECKED	SST
DRAWN	ASJ
CHECKED	SPK