

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
506	123 B-1	HANCOCK	70	1
FED. ROAD DIST. NO.	ILLINOIS	CONTRACT NO. 72992		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PLANS FOR PROPOSED FEDERAL AID HIGHWAY

FAP ROUTE 506 (IL 96)
SECTION 123 B-1
PROJECT: F-0506(012)
STRUCTURE REPLACEMENT
HANCOCK COUNTY
C-96-066-08


D-96-525-05



LOCATION OF SECTION INDICATED THUS: - [black box] -

INDEX OF SHEETS	
SHEET NO.	DESCRIPTION
1	COVER SHEET
2	GENERAL NOTES
3 - 9	SUMMARY OF QUANTITIES
10 - 11	TYPICAL SECTIONS
12 - 15	SCHEDULE OF QUANTITIES
16	ALIGNMENT, TIES, & BENCHMARKS
17 - 19	PLAN AND PROFILE SHEETS
20	GRADING PLAN
21	EROSION PROTECTION DETAILS
22	BRIDGE APPROACH SHOULDER PAVEMENT DRAIN DETAIL
23	DISTRICT 6 ENTRANCE DETAILS
24	WIDE LOAD DETOUR MAP
25 - 26	TRAFFIC BARRIER TERMINAL TYPE 6 (SPECIAL)
27 - 31	MAINTENANCE OF TRAFFIC PLANS / DETAILS
32 - 34	EROSION CONTROL PLANS
35 - 57	STRUCTURE PLANS
58 - 70	CROSS SECTIONS

IDOT HIGHWAY STANDARDS			
000001-06	630301-05	701011-02	729001-01
280001-05	631031-09	701201-03	780001-02
406201-01	635001-01	701306-03	781001-03
420401-08	635006-03	701311-03	857006-01
482011-03	635011-02	701321-11	886001-01
542306-02	666001-01	701326-0A	886006-01
542401-01	667101-01	701901-01	BLR 17-4
606201-02	701001-02	704001-06	BLR 18-5
609001-05	701006-03	720011-01	
630001-09			

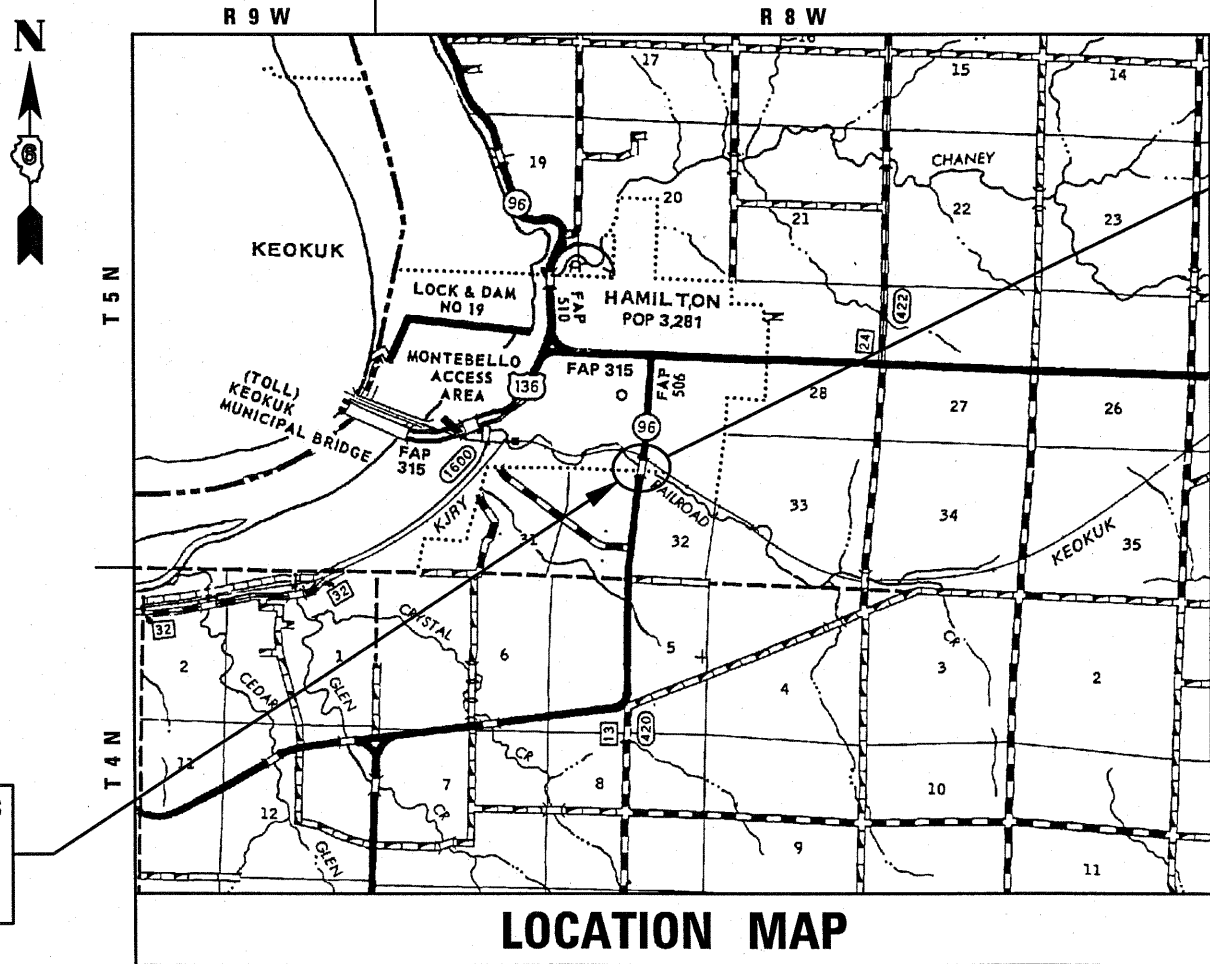


STA. 38+29.50, 0° SKEW
PROJECT INCLUDES REMOVAL OF THE EXISTING SINGLE SPAN BRIDGE; 43'-2" BK TO BK OF ABUTMENT, 33'-0" O. TO O.; PPC DECK BEAMS ON CLOSED ABUTMENTS (EX SN 034-0031); AND IT'S REPLACEMENT WITH A SINGLE SPAN BRIDGE; 115'-0" BK TO BK OF ABUTMENT, 39'-2" O. TO O.; RC DECK ON 63" BULB-T, OPEN INTEGRAL ABUTMENTS (PR SN 034-0522)

BEGIN IMPROVEMENTS
STA. 34 + 00
END IMPROVEMENTS
STA. 42 + 40

ie CONSULTANTS, INC.
6420 SOUTH SIXTH STREET
SPRINGFIELD, ILLINOIS 62712
TEL. (217) 529-8027
FAX (217) 529-4543
WWW.IE-CONSULTANTS.COM

CALL **J.U.L.I.E.** (JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS)
48 Hours (2 working days) Before You Dig.
TOLL FREE: 1 (800) 892-0123

APPROXIMATE SCALE: 0 1 2 MILES
NET LENGTH OF IMPROVEMENT = 840.00 FEET (0.159 MILES)
CLASSIFICATION = MINOR ARTERIAL, RURAL
CURRENT ADT: 2,534 (2012) PROJECTED ADT: 3,765 (2032)
86% PV 8.8% SU 5.2% MU



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED 8-11 2010
Reg. 7/2010
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

Dec 10 2010
Scott E. Stult P.E. /a
ACTING ENGINEER OF DESIGN AND ENVIRONMENT

Dec 10 2010
Christine M. Reed /a
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

[Signature]
DAVID R. BOOHER ILLINOIS P.E. 062-043769 DATE 9-9-2010
EXPIRES 11/30/2011

PROJECT ENGINEER: JOHN NEGANGARD (217) 782-6990
PROJECT MANAGER: VICTOR YOUNG (217) 557-7897
CONTRACT NO. 72992