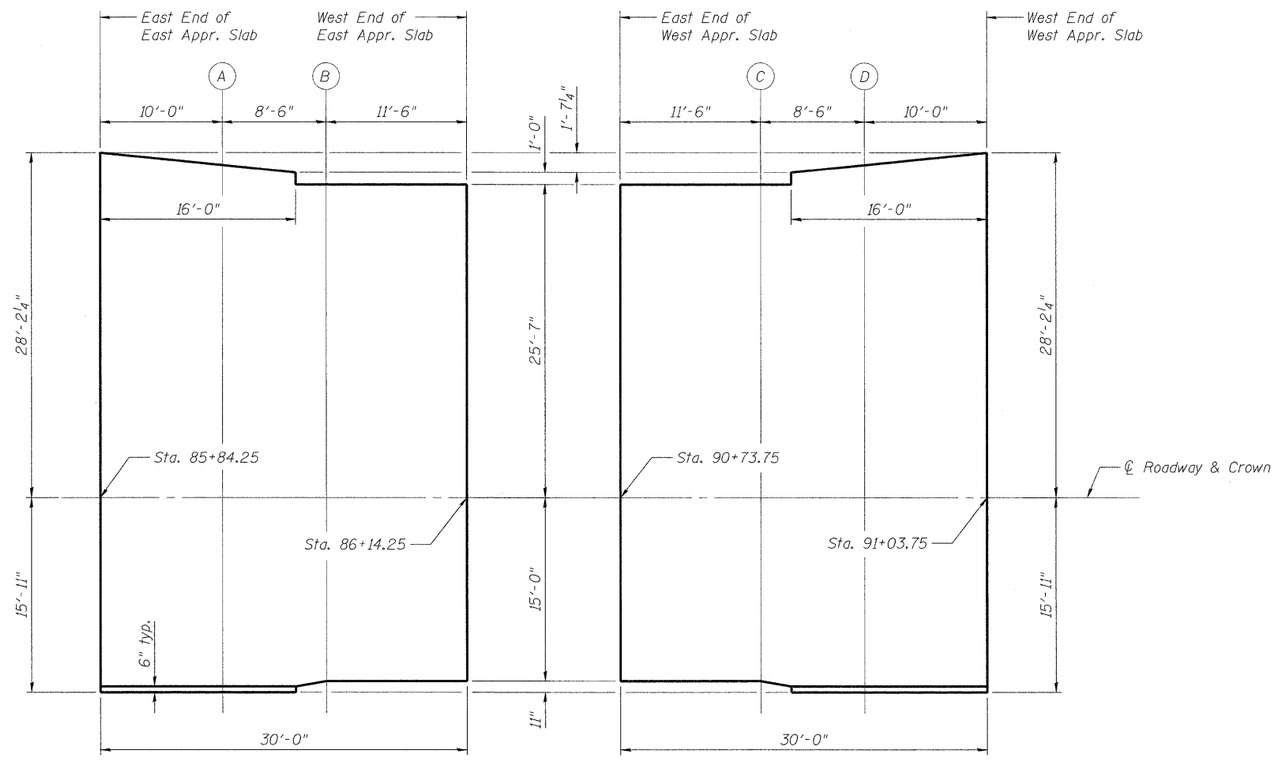

EAST APPROACH

WEST APPROACH

PLAN

SOUTH EDGE OF SLAB

Location	Station	Offset	Theoretical Grade Elevations
E. End East Appr.	85+84.25	-28.19	701.59
A	85+94.25	-27.19	701.82
B	86+02.75	-25.58	702.03
W. End East Appr.	86+14.25	-25.58	702.27
E. End West Appr.	90+73.75	-25.58	711.92
C	90+85.25	-25.58	712.18
D	90+93.75	-27.19	712.33
W. End West Appr.	91+03.75	-28.19	712.54

CENTERLINE ROAD, P.G.L. & CROWN

Location	Station	Offset	Theoretical Grade Elevations
E. End East Appr.	85+84.25	0	702.15
A	85+94.25	0	702.36
B	86+02..75	0	702.54
W. End East Appr.	86+14.25	0	702.78
E. End West Appr.	90+73.75	0	712.43
C	90+85.25	0	712.69
D	90+93.75	0	712.87
W. End West Appr.	91+03.75	0	713.10

NORTH EDGE OF SLAB OR FACE OF CURB

Location	Station	Offset	Theoretical Grade Elevations
E. End East Appr.	85+84.25	15.42	701.84
A	85+94.25	15.42	702.05
B	86+02..75	15.00	702.24
W. End East Appr.	86+14.25	15.00	702.48
E. End West Appr.	90+73.75	15.00	712.13
C	90+85.25	15.00	712.39
D	90+93.75	15.42	712.56
W. End West Appr.	91+03.75	15.42	712.79

Notes:
Negative (-) offsets are offsets to the left of the ℄ while looking upstation.

TOP OF APPROACH SLAB ELEVATIONS
STRUCTURE NUMBER 101-3100

PROFESSIONAL DESIGN FIRM LICENSE #184-001084

© Copyright Hanson Professional Services Inc. 2010

HANSON
Hanson Professional Services Inc.

JOB NO.	SHEET NO. 7	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
03R1807		5103	03-00337-00-BR	Winnebago	66	22
DATE 10/26/10	47 SHEETS			CONTRACT NO. 85523		
			ILLINOIS	FED. AID PROJECT		

LAYOUT	JKR/SMK	08/23/10
DRAWN	MGM	10/25/10
REVIEWED	JKR/SMK	10/26/10

10/29/2010
I:\03jobs\03R1807\StructSheets\S-007-TOS_Appdgn