


F.A. ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6721	07-00116-01-FP	TAZEWELL	20	1
FEDERAL ROAD DIST NO. 7		ILLINOIS	CONTRACT NO. 89490	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PLANS FOR
PROPOSED LOCAL AGENCY IMPROVEMENTS
FEDERAL URBAN PROJECT

INDEX OF SHEETS

- | | |
|-------|--|
| 1 | COVER SHEET |
| 2 | TYPICAL SECTION AND CONSTRUCTION PHASING |
| 3 | SUMMARY AND SCHEDULES OF QUANTITIES |
| 4-6 | PLAN AND PROFILE SHEET - EAST JEFFERSON STREET |
| 7 | PLAN AND PROFILE SHEET - TENNESSEE AVE. |
| 8 | PLAN AND PROFILE - TENNESSEE AVE AND INTERSECTION DETAIL |
| 9 | PAVEMENT MARKINGS |
| 10 | CONSTRUCTION DETAILS |
| 11 | STORM WATER POLLUTION PREVENTION PLAN |
| 12-20 | CROSS SECTIONS |

PLAN
PROFILE HORIZONTAL
PROFILE VERTICAL
CROSS SECTION HORIZONTAL
CROSS SECTION VERTICAL




FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THESE SCALES MAY BE USED.

F.A.U. ROUTE 6721, COUNTY OF TAZEWELL, ILLINOIS
SECTION 07-00116-01-FP
PROJECT M-5093 (127)
JOB NO. C-94-044-08
VILLAGE OF MORTON

LIST OF CONSTRUCTION STANDARDS

- | | |
|-----------|--|
| 280001-05 | TEMPORARY EROSION CONTROL SYSTEMS |
| 424001-05 | CURB RAMPS FOR SIDEWALKS |
| 542301-03 | PRECAST REINFORCED CONCRETE FLARED END SECTION |
| 602301-03 | INLET - TYPE A |
| 602306-03 | INLET - TYPE B |
| 602601-02 | PRECAST REINFORCED CONCRETE FLAT SLAB TOP |
| 604001-03 | FRAME AND LIDS, TYPE 1 |
| 604036-02 | TYPE B GRATE |
| 606001-04 | CONCRETE CURB TYPE B AND COMBINATION CURB AND GUTTER |
| 666001-01 | RIGHT OF WAY MARKERS |
| 667101-01 | PERMANENT SURVEY MARKERS |
| 701201-04 | LANE CLOSURE 2L 2W - DAY ONLY |
| 701301-04 | LANE CLOSURE 2L 2W - SHORT TIME OPERATION |
| 701311-03 | LANE CLOSURE 2L 2W - MOVING OPERATION DAY ONLY |
| 701501-06 | URBAN LANE CLOSURE, 2L, 2W - UNDIVIDED |
| 701901-01 | TRAFFIC CONTROL DEVICES |
| BLR 17-4 | TRAFFIC CONTROL DEVICES - DAY LABOR CONSTRUCTION |

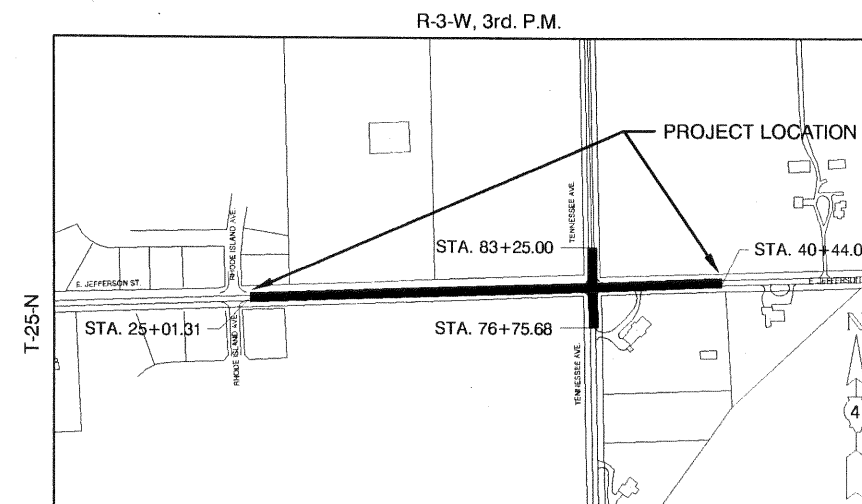

LOCATION SKETCH
RHODE ISLAND AVE. TO 400 FEET EAST OF TENNESSEE AVE.
LENGTH OF PROJECT: E. JEFFERSON ST. = GROSS 2192.01 LIN. FT.
NET 2156.01 LIN. FT. = 0.408 MILES

E. JEFFERSON STREET (RHODE ISLAND AVE. TO 400 FT. E. OF TENNESSEE AVE.)

FUNCTIONAL CLASSIFICATION: URBAN COLLECTOR
AD = 1,000 (2008) 1,350 (2028)
DESIGN SPEED = 30 MPH
GUIDELINES UTILIZED: URBAN
PV = 28.5% SU = 1.0% MU = 0.5%

VILLAGE OFFICIALS

NORMAN DURFLINGER, PRESIDENT
JOE NOHL, VILLAGE CLERK

BOARD OF TRUSTEES

GINGER HERMANN
TONY HUETTE
JEFF KAUFMAN
STEPHEN E. NEWHOUSE
DARRELL VIERLING
BETSY YARCHO



LOCATION OF PROPOSED IMPROVEMENT

APPROVED	10/26	2010
Robert C. W. [Signature]		
LOCAL AGENCY OFFICIAL		
PASSED	11/5	2010
[Signature]		
DISTRICT ENGINEER OF LOCAL AGENCIES & STREETS		
RELEASING FOR BID BASED ON LIMITED REVIEW	Nov 6	2010
[Signature]		
DEPUTY DIRECTOR OF HIGHWAY REGION THREE ENGINEER		
STATE OF ILLINOIS		
DEPARTMENT OF TRANSPORTATION		

PROPOSED IMPROVEMENT CONSISTS OF REMOVAL OF EXISTING SURFACE, CONSTRUCTING A FULL DEPTH HOT-MIX ASPHALT PAVEMENT, CURB AND GUTTER, STORM SEWERS, PAVEMENT MARKINGS, AND INTERSECTIONS IMPROVEMENTS AT E. JEFFERSON ST. AND TENNESSEE AVE.

COMMITMENTS:
1. ACCESS TO GRACE CHURCH TO BE PROVIDED AT ALL TIMES.

JULIE LOCATION

CALL JULIE 1-800-892-0123 48 HOURS BEFORE YOU DIG
EXCLUDING SATURDAYS, SUNDAYS, AND HOLIDAYS

CONTRACT NO. 89490 CATALOG # 033788-00

TAZEWELL COUNTY

SECTION NO. 07-00116-01-FP

M MOHR & KERR ENGINEERING & LAND SURVEYING, P.C.
7336 N. University Ave. Office: (309) 692-8500
Peoria, Illinois 61614 Fax: (309) 692-8501
www.mohrandkerr.com Professional Design Firm #184.005091

PROJECT NO. 09-112
SHEET 1 OF 20
DRAWING NO. 1