

CONSTRUCTION PLANS FOR CASEY MUNICIPAL AIRPORT


CASEY, CLARK COUNTY, ILLINOIS

EDGE LIGHTING ON RUNWAY 4-22 AND TAXIWAYS

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR108158	1/C #8 5KV UG CABLE IN UD	LIN. FT.	13,635	
AR109301	4 KW REGULATOR, STYLE 1	EACH	1	
AR109311	7.5 KW REGULATOR, STYLE 1	EACH	1	
AR109903	REMOVE REGULATOR	EACH	2	
AR110316	6" STEEL DUCT - JACKED	LIN. FT.	95	
AR125411	MITL, STAKE MOUNTED - LED	EACH	53	
AR125416	MITL, BASE MOUNTED - LED	EACH	6	
AR125442	TAXI GUIDANCE SIGN, 2 CHARACTER	EACH	3	
AR125443	TAXI GUIDANCE SIGN, 3 CHARACTER	EACH	1	
AR125445	TAXI GUIDANCE SIGN, 5 CHARACTER	EACH	1	
AR125505	MIRL, STAKE MOUNTED	EACH	30	
AR125510	MIRL, BASE MOUNTED	EACH	10	
AR125540	MI THRESHOLD LIGHT STAKE MTD	EACH	16	
AR125901	REMOVE STAKE MOUNTED LIGHT	EACH	83	
AR125902	REMOVE BASE MOUNTED LIGHT	EACH	18	
AR125904	REMOVE TAXI GUIDANCE SIGN	EACH	2	
AR150530	TRAFFIC MAINTENANCE	L. SUM	1	
AR800250	2-1/C #8 5 KV UG CABLE IN UD	LIN. FT.	1,595	

ILLINOIS PROJECT NO. 1H8-4369
SBG PROJECT NO. 3-17-SBGP-XX

DECEMBER 5, 2014

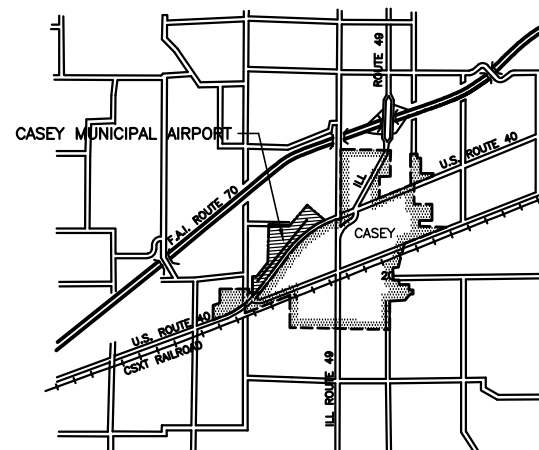

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	EDGE LIGHTING UNIT REMOVAL PLAN
4-5	RUNWAY 4-22 LIGHTING LAYOUT
6-7	RUNWAY 4-22 AND TAXIWAY LIGHTING LAYOUT
8-9	TYPICAL LIGHTING DETAILS

	PLANS PREPARED BY :	CITY OF CASEY, ILLINOIS
	HUTCHISON ENGINEERING, INC. JACKSONVILLE, ILLINOIS	APPROVED <i>Scott C. Baker</i> MAYOR DATE <u>11/14/14</u>
EXPIRES 11/30/15 ENGINEER'S SEAL	SUBMITTED <i>Scott C. Baker</i> DATE <u>October 24, 2014</u>	APPROVED <i>Scott C. Baker</i> CITY CLERK DATE <u>11/14/14</u>