SIGN DETAIL

1:75

64-CL-35
STA. 9+70

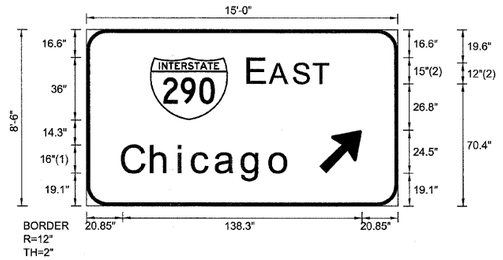

BORDER
R=12"
TH=2"

FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	36.8	49.4	45	36
ARMED	45	134.6	19.1	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																				LENGTH	SERIES/SIZE
E	A	S	T																																			ClearviewHwy-5-W
93.8	106.5	120.2	131.6																																	46.5	15,12
C	h	i	c	a	g	o																																ClearviewHwy-5-W-R
20.9	37.7	53.5	61.4	74.9	90.2	106.3																															97.8	16\13

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 30 OF 58 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	358
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		