SIGN DETAIL

1:75

WB-TR-44
STA. 391+50

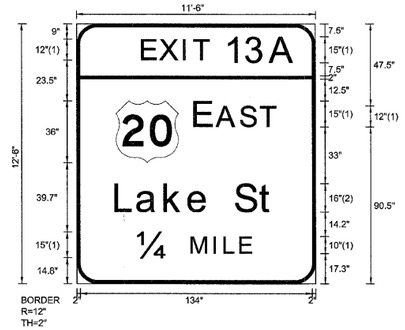

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	11'-6" x 12'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_4	0	22.7	69.5	36	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
E	X	I	T	1	3	A																																			ClearviewHwy-5-W
38.4	48.6	62.3	68.2	86.8	98.2	112.4																																		88.1	12,15
E	A	S	T																																						ClearviewHwy-5-W
68.7	81.5	95.2	106.6																																				46.5	15,12
L	a	k	e		S	t																																			ClearviewHwy-5-W-R
22.7	35.1	51.1	64.9	76.6	91.9	106																																		91.2	16/13
¼	M	I	L	E																																					ClearviewHwy-5-W
35.6	66.6	79.7	85.6	94.7																																		65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILE$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 37 OF 58 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	365
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		