SIGN DETAIL
1:75

WB-BM-91
STA. 699+70

SIGN NUMBER	name
WIDTH x HGHT.	12'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

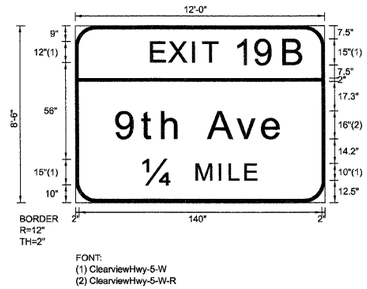

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)							LENGTH	SERIES/SIZE
E	X	I	T	1	9	B		ClearviewHwy-5-W
44.3	54.6	68.2	74.2	92.8	104.8	121.1	88.1	12,15
9	t	h		A	v	e		ClearviewHwy-5-W-R
24	38.6	50.5	61.5	77	93.6	108.3	96	16/13
¼	M	I	L	E				ClearviewHwy-5-W
39.3	70.3	83.4	89.3	98.4			65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 21 OF 34 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3131, ETC., 3435) RS-6	COOK	215	153
		CONTRACT NO. 60K10		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		