


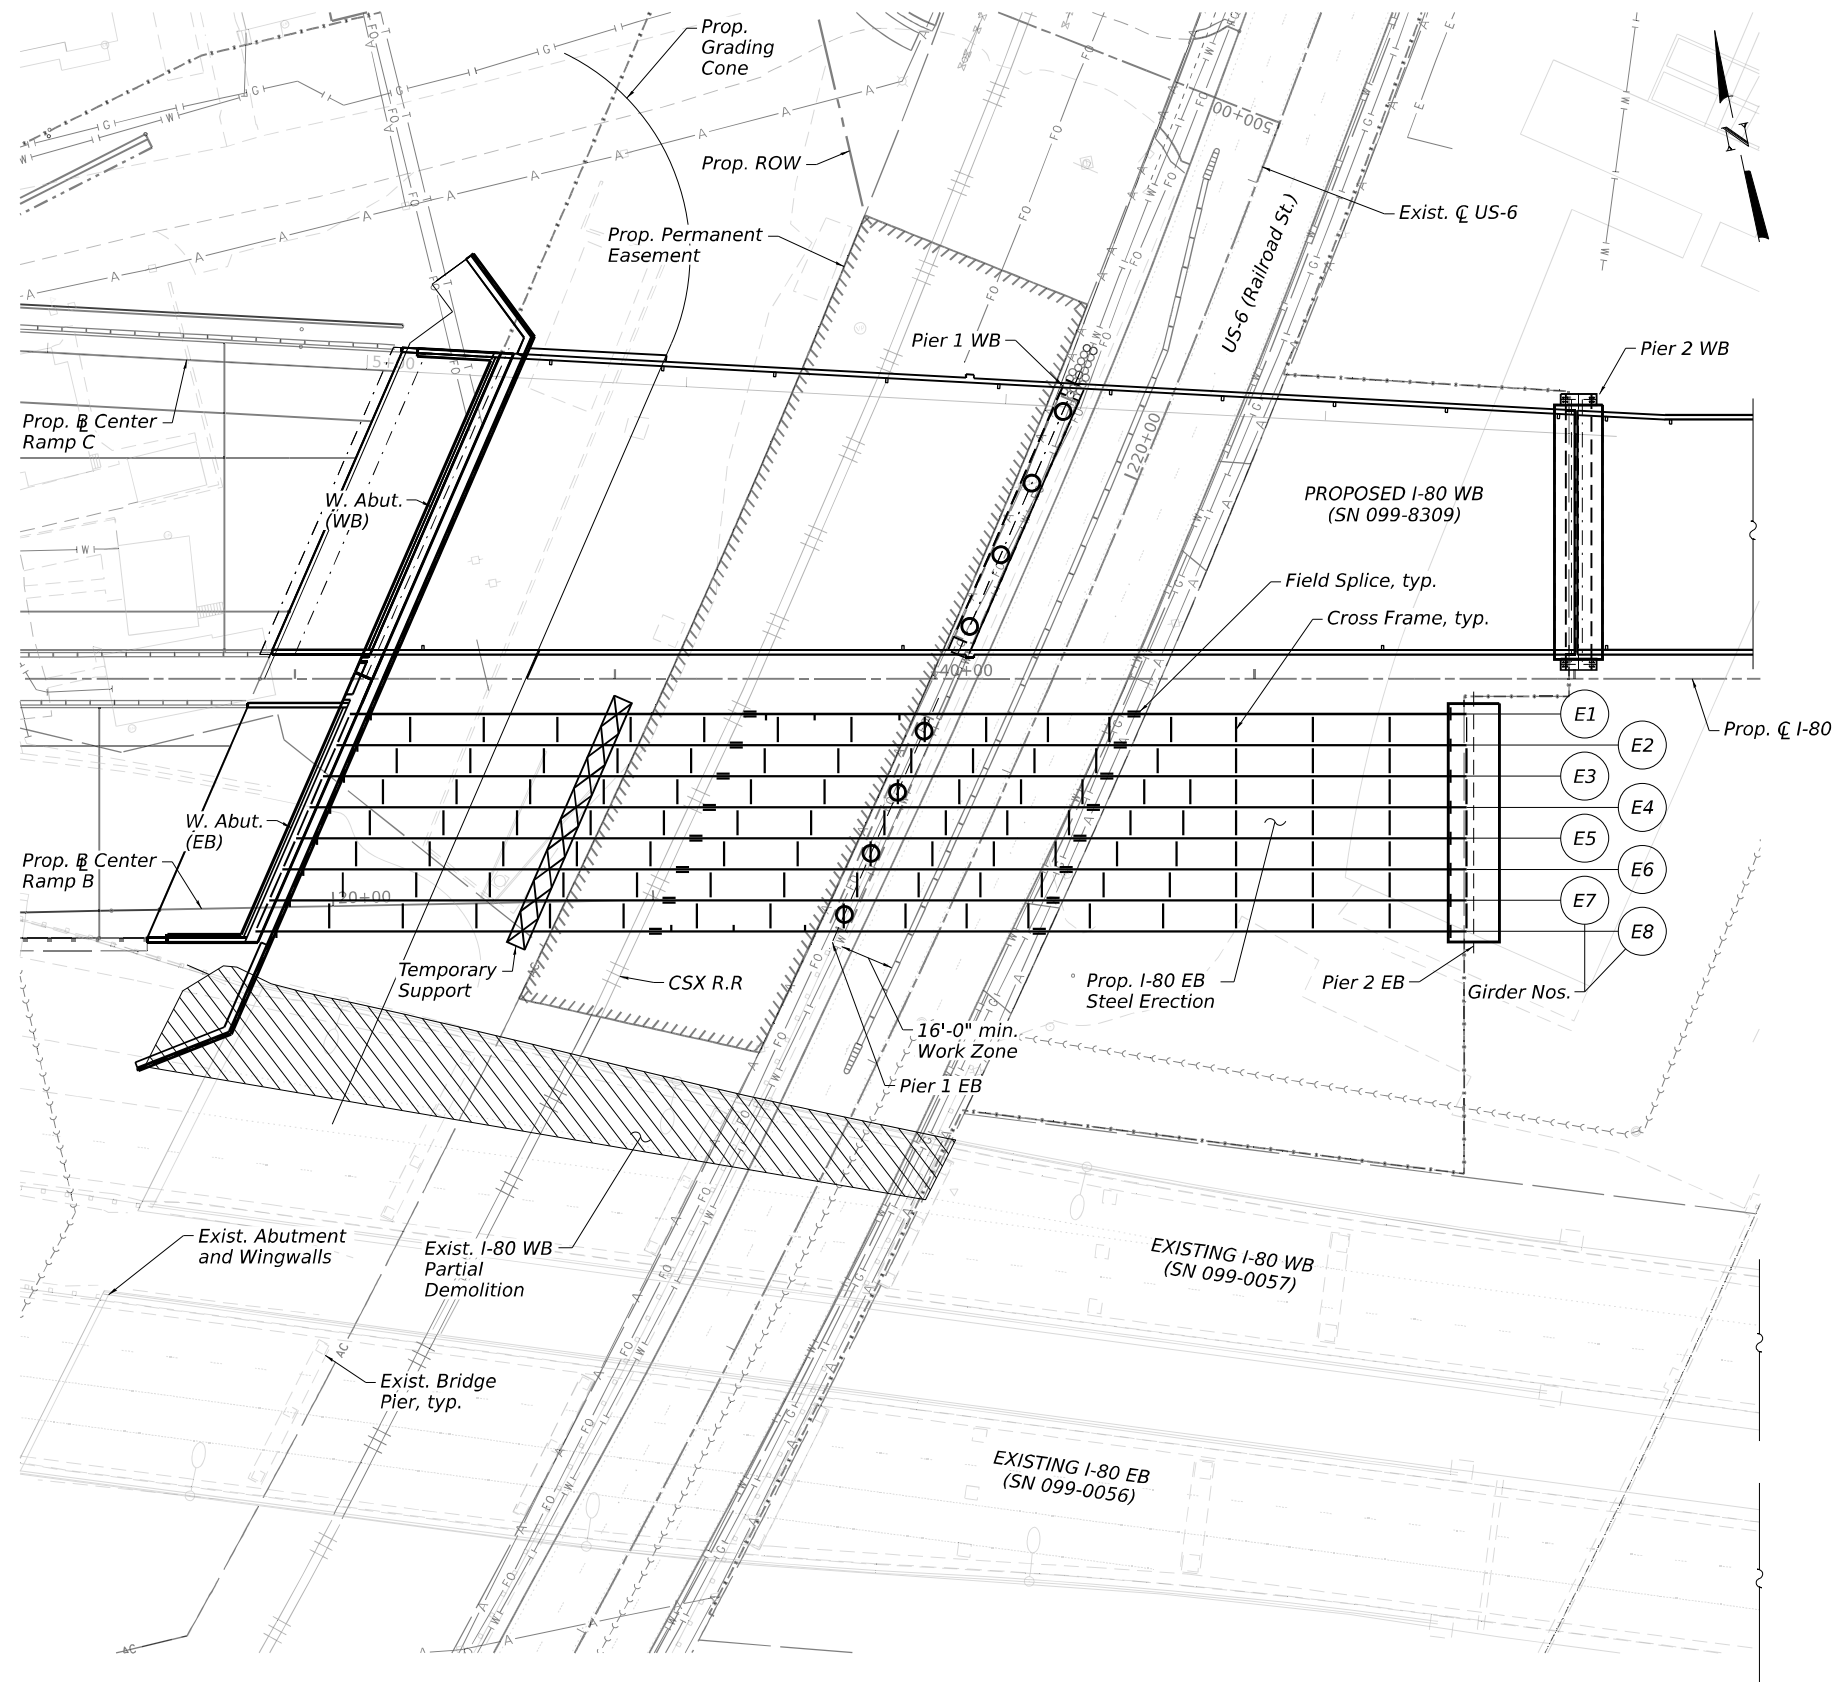

LEGEND

	Existing Right-of-Way
	Proposed Permanent Easement
	Temporary Support
	Exist. Bridge Removal
	Temporary Concrete Barrier

NOTES:

- The erection of the structural steel shall be accomplished by a steel erection contractor or sub-contractor certified as a Certified Structural Steel Erector (ACSE) with Bridge Erection Endorsement by AISC. See special provisions for "Erections of Complex Steel Structures."
- The erection stages shown on sheets S-21 thru S-23 are presented only as a conceptual erection procedure. All intermediate stages of erection, temporary restraining devices, temporary supports, jacking devices, crane locations, etc. that may be necessary are not shown. The Contractor may submit for approval an alternate procedure, or modify the conceptual procedure provided. The conceptual erection sequence shown is provided for information only and is not all-inclusive, and does not relieve the Contractor of the requirement to submit a steel erection plan prepared and sealed by a Licensed Structural Engineer in Illinois.
- Refer to the CSX Transportation (CSXT) Public Project Information Manual for additional requirements needed for working on/above/adjacent to CSXT. Specific sections that pertain to this project are: Special Provisions for Construction near CSXT Property, Overhead Bridge Criteria, Construction Submission Criteria, and Insurance Requirements for Public Projects.

PLAN - CONCEPTUAL ERECTION UNIT 1 EB

MODEL Default: FILE Name: p:\projects\trans\scorp\p1\10022\03-WSP\CD\62R23-RB-1-Sheets\Structural\0998309-8325-5172-SEB02.dgn



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684


USER NAME = USSJ696614	DESIGNED - GM	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 60,000' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - PJL	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CONCEPTUAL STEEL ERECTION PLAN - UNIT 1 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-22 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	603
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

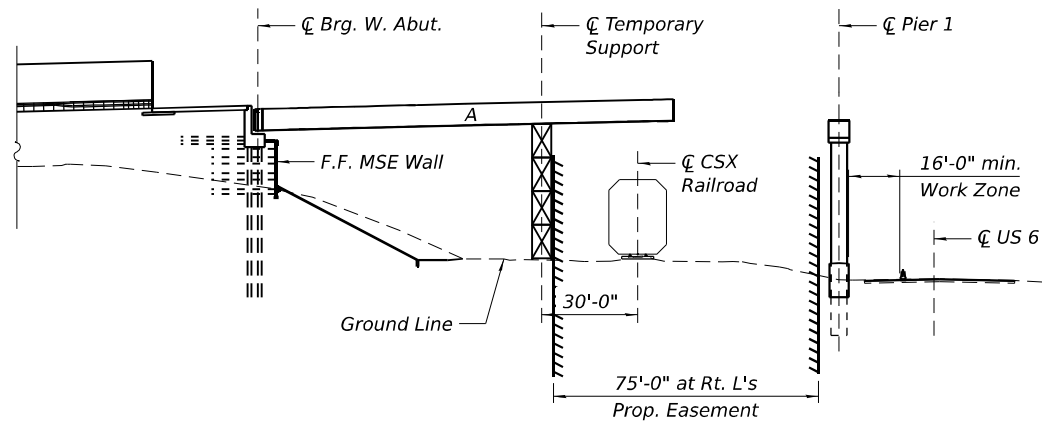


ELEVATION - STAGE 1

Note:
Elevations and Stage Notes are given for the WB steel erection. The EB steel erection is similar.

STAGE 1 NOTES:


1. Erect Temporary Support, provide jacking devices as required.
2. Position crane to west of CSX R.O.W. Erect Girder W1 Segment A onto Temporary Support. Hold Girder W1 Segment A with supplemental cranes as required for stability. Do not release cranes.
3. Erect Girder W2 Segment A and cross frames between Girder W1 and W2 before releasing cranes.
4. Erect Girder W3 thru W4 Segment A and cross frames. Proceed to Stage 2.
5. After Girder W1 thru W4 Segment A & B are erected. Repeat Step 4 for Girders W5 thru W10 and cross frames.

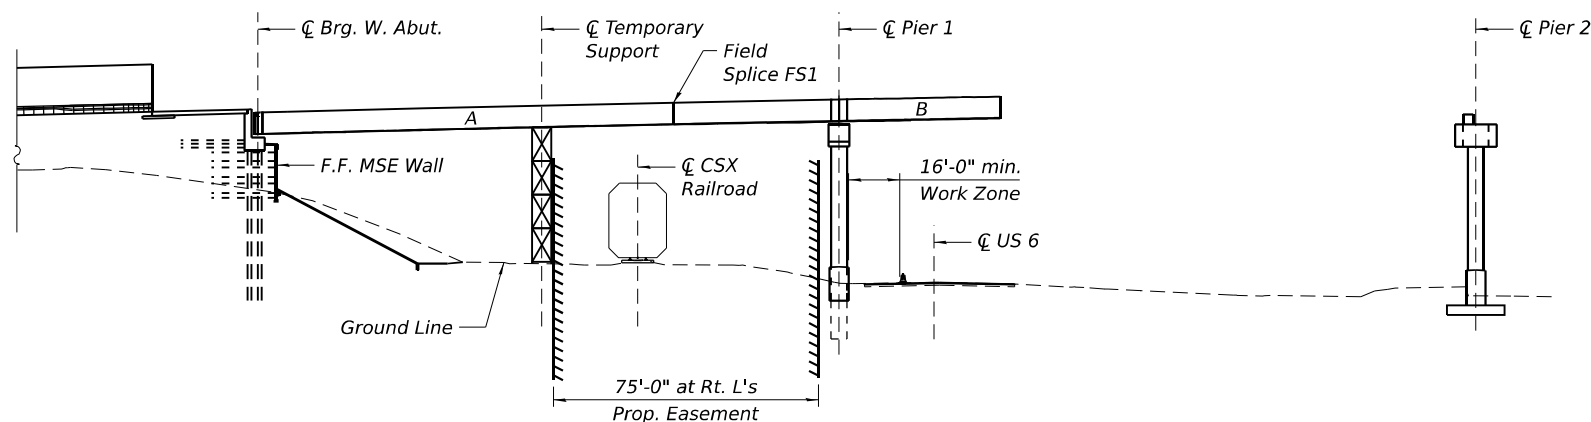

ELEVATION - STAGE 2

STAGE 2 NOTES:

1. Position crane to north of Pier 1 and east of CSX R.O.W. Position holding cranes and man-lifts in CSX R.O.W. to perform field splicing.
2. Erect Girder W1 Segment B and hold with cranes as required for stability. Complete Field Splice FS1 bolting. Do not release cranes.
3. Erect Girder W2 Segment B and cross frames and complete Field Splice FS1 bolting.
4. Erect Girders W3 and W4 Segment B and cross frames. Return to Stage 1 for Girder W5 thru W10 and cross frames erection and completion of Field Splice FS1 bolting.
5. Erect Girders W5 thru W10 Segment B and cross frames and complete Field Splice FS1 bolting.

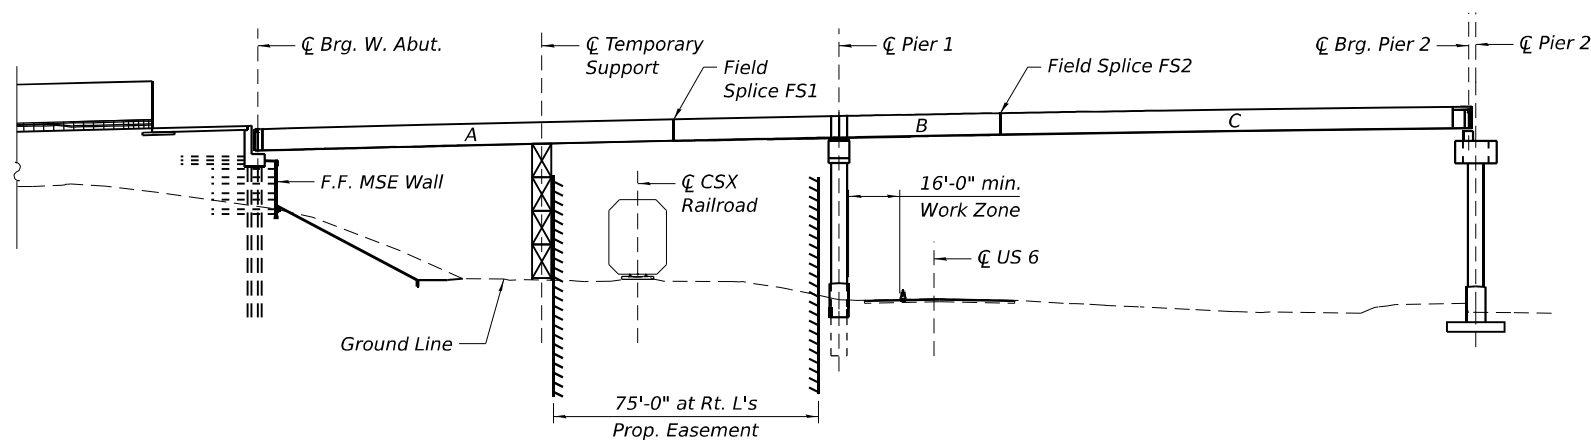

ELEVATION - STAGE 3

STAGE 3 NOTES:

1. Position cranes east of US-6.
2. Erect Girder W1 Segment C and hold with cranes as required for stability. Complete Field Splice FS2 bolting. Do not release cranes.
3. Erect Girder W2 Segment C and cross frames and complete Field Splice FS2 bolting.
4. Erect Girders W3 thru W10 Segment C and cross frames and complete Field Splice FS2 bolting.
5. Remove Temporary Support.


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**CONCEPTUAL STEEL ERECTION - UNIT 1 WB & EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	604
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

SHEET 5-23 OF 5-333 SHEETS

USER NAME = USSJ696614	DESIGNED - GM	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 60:0,000 " = 1" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - PJL	REVISED -

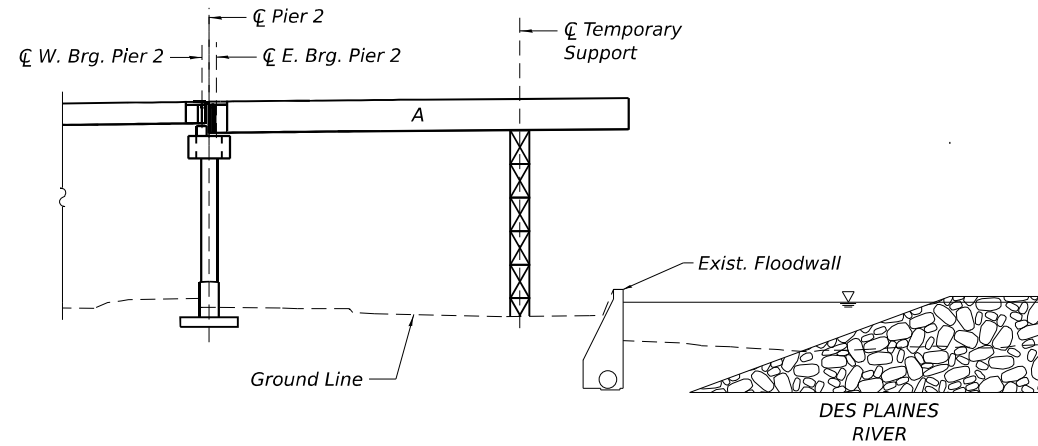


ELEVATION - STAGE 1

Note:
Elevations and Stage Notes are given for the WB steel erection. The EB steel erection is similar.

STAGE 1 NOTES:


1. Erect Temporary Support, provide jacking devices as required.
2. Position crane east of US-6 and to the west of existing floodwall. Erect Girder W1 Segment A onto Temporary Support. Hold Girder W1 Segment A with supplemental cranes as required for stability. Do not release cranes.
3. Erect Girder W2 Segment A and cross frames between Girder W1 and W2 before releasing cranes.
4. Erect Girder W3 thru W8 Segment A and cross frames. Proceed to Stage 2.

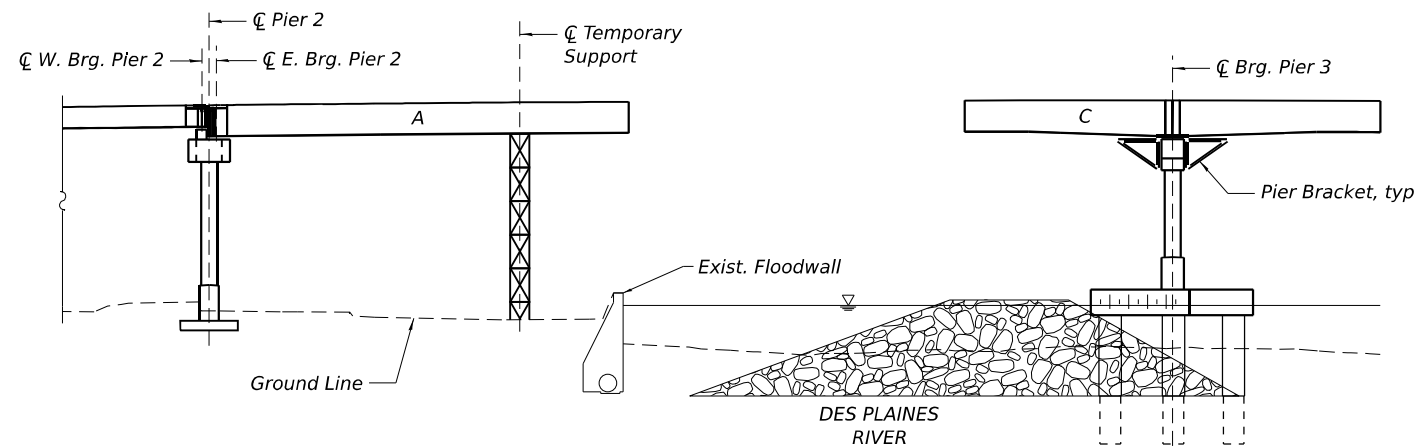

ELEVATION - STAGE 2

STAGE 2 NOTES:

1. Position crane to west of Pier 3 on the temporary causeway.
2. Install Pier Brackets and secondary stability components and/or erect temporary supports.
3. Erect Girder W1 Segment C onto Pier 3.
4. Erect Girders W2 thru W8 Segment C and cross frames onto Pier 3.

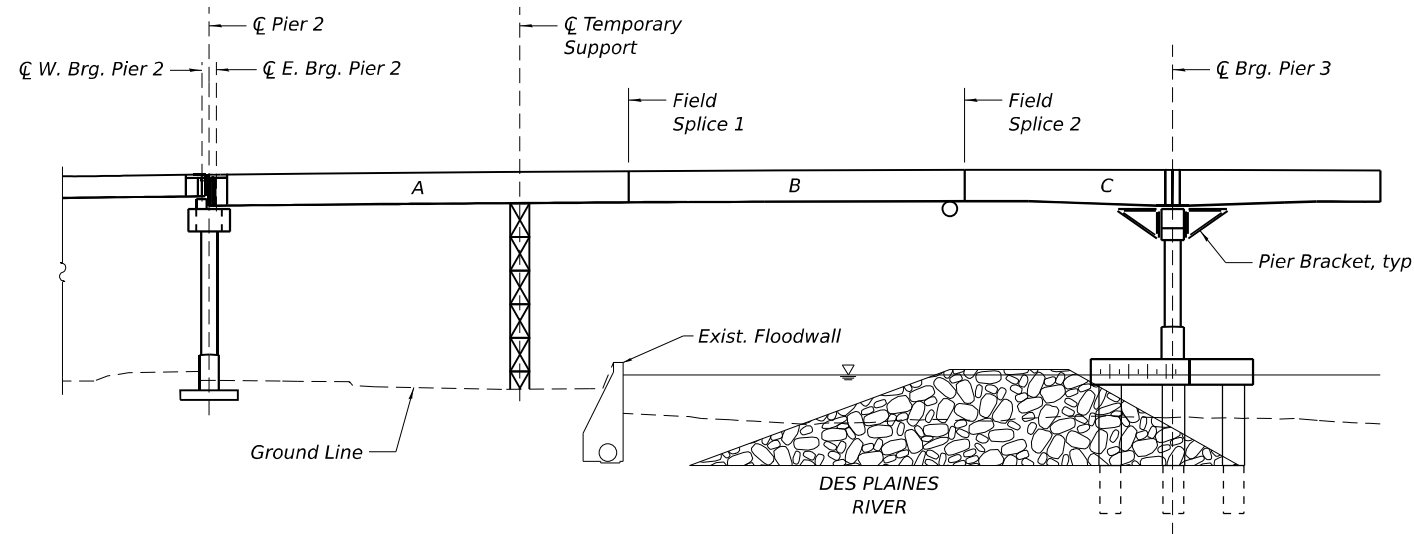

ELEVATION - STAGE 3

STAGE 3 NOTES:

1. Position cranes east of US-6 and on temporary causeway. Position man-lifts and holding cranes as needed for stability and field splicing.
2. Erect Girder W1 Segment B and hold with cranes as required for stability. Complete Field Splice 1 & 2 bolting. Do not release cranes.
3. Erect Girder W2 Segment B and cross frames and complete Field Splice 1 & 2 bolting.
4. Erect Girders W3 thru W8 Segment B and cross frames and complete Field Splice 1 & 2 bolting.
5. Remove Temporary Support.

MODEL Default:
FILE NAME: p:\projects\trans\systems-pw\hntb\comtrans\systems-pw\hntb\Documents\Projects_2018\CH4001401180022\03-WSP\CD\62R23-RB-1\Sheet\Structural\0998309-42R23-5176-SEB06.dgn

wsp
WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
DESIGNED -	GM
CHECKED -	PJL
PLOT SCALE	= 60:0,000 " = 1" / in.
PLOT DATE	= 11/5/2025
DRAWN -	GM
CHECKED -	PJL

REVISED -	
REVISED -	
REVISED -	
REVISED -	

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**CONCEPTUAL STEEL ERECTION 1 - UNIT 2 WB & EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**


SHEET 5-26 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	607
				CONTRACT NO. 62R23
		ILLINOIS	FED. AID PROJECT	

STAGE 4 NOTES:

- 1. Erect Temporary Support 2, provide jacking devices as required.
- 2. Position crane west of River St. and to the east of existing floodwall. Erect Girder W1 Segment I onto Temporary Support 2. Hold Girder W1 Segment A with supplemental cranes as required for stability. Do not release cranes.
- 3. Erect Girder W2 Segment I and cross frames between Girder W1 and W2 before releasing cranes.
- 4. Erect Girder W3 thru W8 Segment I and cross frames. Proceed to Stage 5.


Note:
Elevations and Stage Notes are given for the WB steel erection. The EB steel erection is similar.

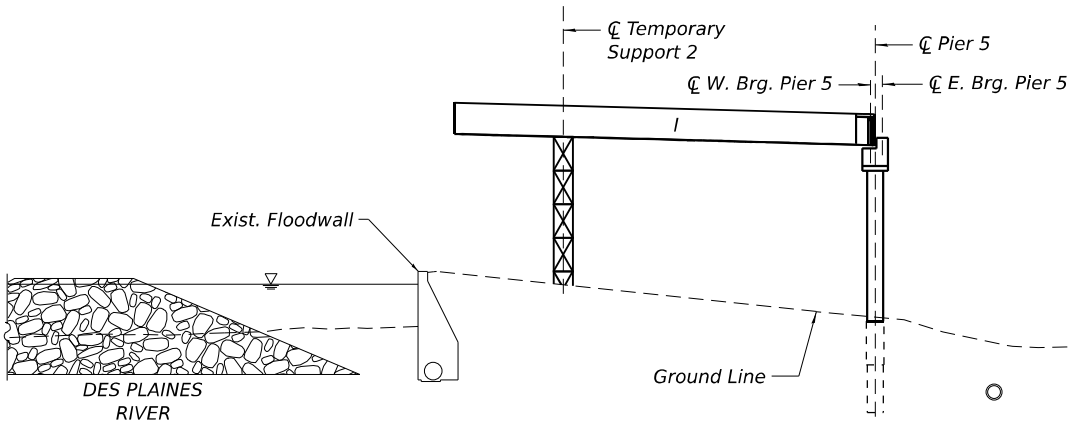

ELEVATION - STAGE 4

STAGE 5 NOTES:


- 1. Position crane to east of Pier 4 on the temporary causeway.
- 2. Install Pier Brackets and secondary stability components and/or erect temporary supports.
- 3. Erect Girder W1 Segment G onto Pier E.
- 4. Erect Girders W2 thru W8 Segment G and cross frames onto Pier 4.

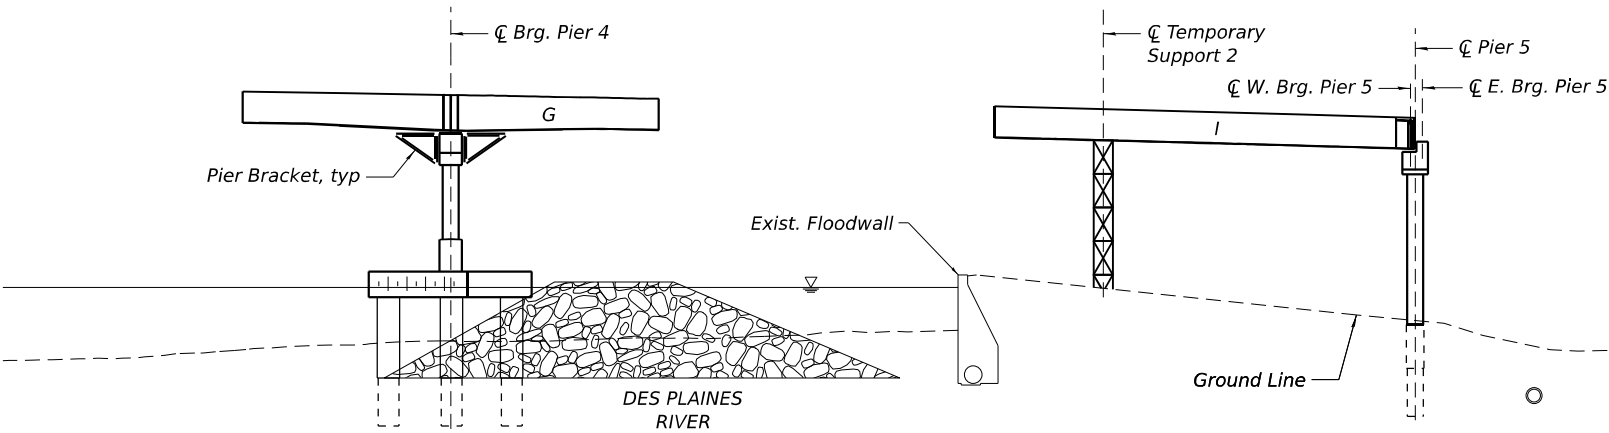

ELEVATION - STAGE 5

STAGE 6 NOTES:

- 1. Position cranes west of River St. and on temporary causeway. Position man-lifts and holding cranes as needed for stability and field splicing.
- 2. Erect Girder W1 Segment H and hold with cranes as required for stability. Complete Field Splice FS7 & FS8 bolting. Do not release cranes.
- 3. Erect Girder W2 Segment H and cross frames and complete Field Splice FS7 & FS8 bolting.
- 4. Erect Girders W3 thru W8 Segment H and cross frames and complete Field Splice FS7 & FS8 bolting.

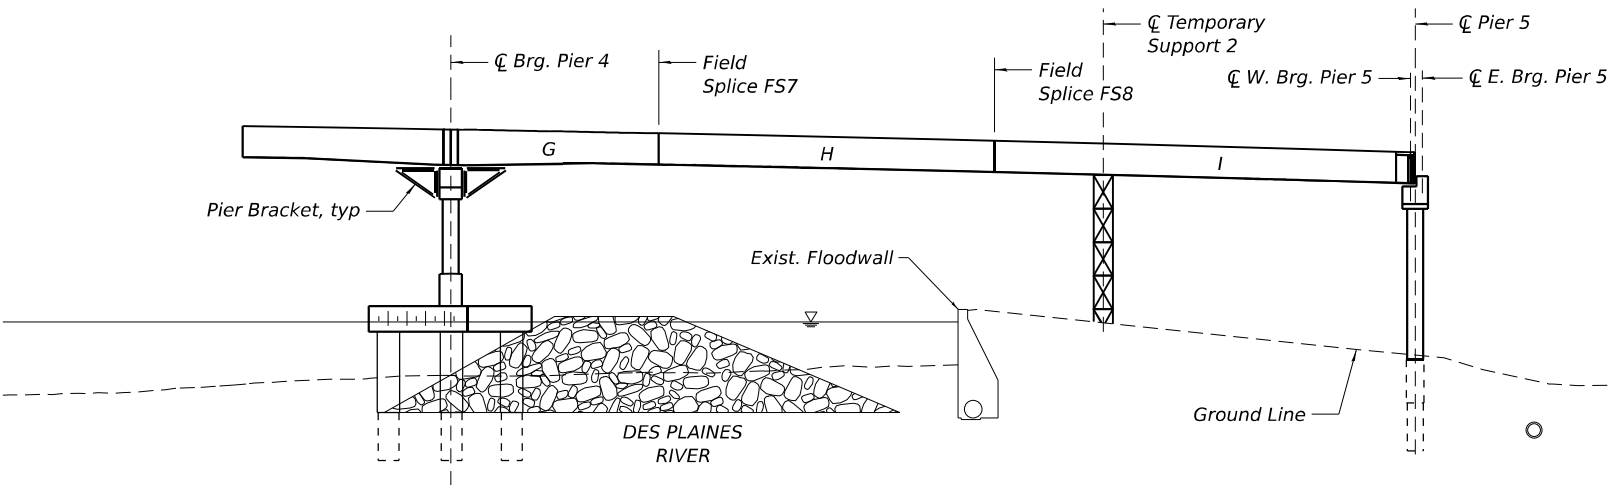

ELEVATION - STAGE 6

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CONCEPTUAL STEEL ERECTION 2 - UNIT 2 WB & EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	608
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

SHEET 5-27 OF 5-333 SHEETS




WSP USA INC.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 60:0,000 '"/>
PLOT DATE	= 11/5/2025

DESIGNED	- GM
CHECKED	- PJL
DRAWN	- GM
CHECKED	- PJL

REVISED	-
REVISED	-
REVISED	-
REVISED	-

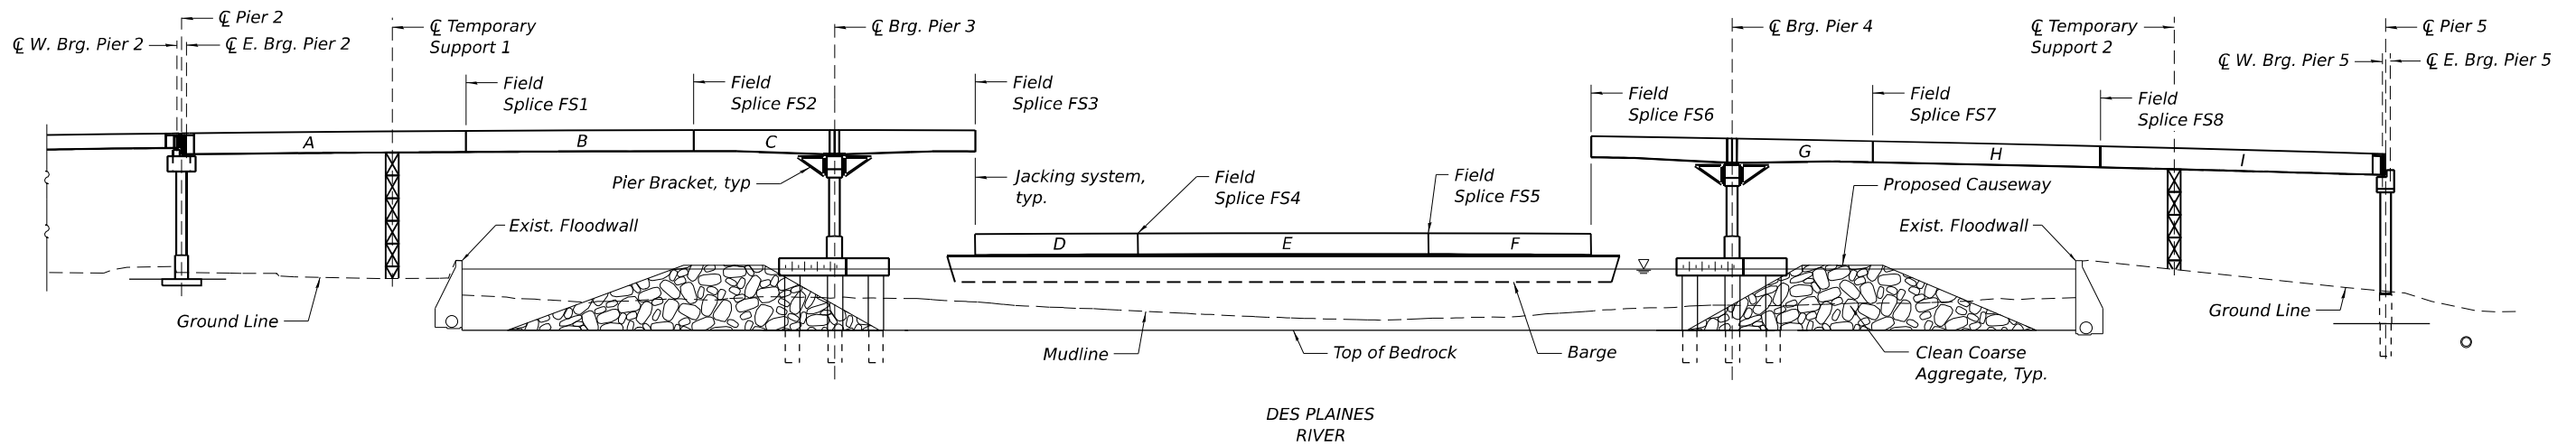

ELEVATION - STAGE 7

Note:
Elevation and Stage Notes are given for the
WB steel erection. The EB steel erection is
similar.

STAGE 7 NOTES:

- Using a single barge, or multiple barges connected together, construct a floating platform.
- On the floating platform, assemble Girder W1 thru W4 Segments D, E and G girders, cross frames, top lateral bracing, and complete Field Splice FS4 & FS5. All connections should be made completely.
- Lift the Girder W1 thru W4 Segments E, F, and G assembly into place with strand jack systems placed near the ends of the previously erected segments. Use jacking devices to adjust longitudinally and vertically as necessary, to complete Field Splice FS3 & FS6. Fully complete Field Splice FS3 & FS6 for all girder lines before releasing lifted assembly from strand jack systems.
- Repeat Step 3 for Girder W5 thru W8. Erect cross frames between previously erected Girder W4 and newly erected Girder W5.
- Remove Temporary Supports 1 and 2 and Pier Brackets.

MODEL Default:
FILE NAME: p:\projects\transys\corp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structural\0998309-42R23-5178-SEB08.dgn

wsp
WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - GM	REVISED -
CHECKED - PJL	CHECKED - PJL	REVISED -
PLOT SCALE = 80:0,000 " = 1" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - PJL	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**CONCEPTUAL STEEL ERECTION 3 - UNIT 2 WB & EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**

SHEET 5-28 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	609
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

Model Default:
File Name: p:\projects\transys\corp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5202-DEVI02.dgn

INSIDE FACE OF NORTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+61.38	-79.55	596.88	596.90
⌒ EXP. JT.	38+63.12	-79.46	596.92	596.94
⌒ BRG. W. ABUT. WB	38+65.39	-79.34	596.96	596.98
1A	38+75.37	-78.80	597.15	597.22
1B	38+85.36	-78.27	597.33	597.46
1C	38+95.34	-77.74	597.51	597.69
1D	39+05.33	-77.21	597.68	597.90
1E	39+15.32	-76.68	597.86	598.11
1F	39+25.30	-76.14	598.02	598.29
1G	39+35.29	-75.61	598.20	598.48
1H	39+45.27	-75.08	598.38	598.66
1I	39+55.26	-74.55	598.56	598.85
1J	39+65.24	-74.02	598.77	599.01
1K	39+75.23	-73.48	598.96	599.19
1L	39+85.22	-72.95	599.16	599.35
1M	39+95.20	-72.42	599.35	599.50
1N	40+05.19	-71.89	599.54	599.65
1O	40+15.17	-71.36	599.72	599.81
1P	40+25.16	-70.82	599.90	599.95
1Q	40+35.14	-70.29	600.07	600.11
⌒ BRG. PIER 1 WB	40+43.23	-69.86	600.21	600.23
1R	40+53.21	-69.33	600.38	600.39
1S	40+63.20	-68.80	600.54	600.55
1T	40+73.18	-68.27	600.70	600.72
1U	40+83.17	-67.73	600.86	600.88
1V	40+93.16	-67.20	601.01	601.05
1W	41+03.14	-66.67	601.15	601.21
1X	41+13.13	-66.14	601.30	601.37
1Y	41+23.11	-65.60	601.44	601.52
1Z	41+33.10	-65.07	601.57	601.66
1AA	41+43.08	-64.54	601.70	601.80
1AB	41+53.07	-64.01	601.83	601.93
1AC	41+63.06	-63.48	601.95	602.04
1AD	41+73.04	-62.94	602.07	602.15
1AE	41+83.03	-62.41	602.19	602.25
1AF	41+93.01	-61.88	602.30	602.34
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-61.56	602.37	602.39
⌒ PIER 2 WB	42+01.21	-61.44	602.39	602.41

GIRDER W1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+60.57	-77.54	596.91	596.93
⌒ EXP. JT.	38+62.31	-77.45	596.94	596.96
⌒ BRG. W. ABUT. WB	38+64.57	-77.33	596.98	597.01
1A	38+74.56	-76.79	597.17	597.25
1B	38+84.55	-76.26	597.36	597.49
1C	38+94.53	-75.73	597.54	597.71
1D	39+04.52	-75.20	597.71	597.93
1E	39+14.50	-74.66	597.88	598.13
1F	39+24.49	-74.13	598.05	598.32
1G	39+34.48	-73.60	598.22	598.50
1H	39+44.46	-73.06	598.41	598.69
1I	39+54.45	-72.53	598.59	598.87
1J	39+64.43	-72.00	598.79	599.04
1K	39+74.42	-71.46	598.99	599.21
1L	39+84.40	-70.93	599.18	599.37
1M	39+94.39	-70.40	599.37	599.53
1N	40+04.38	-69.86	599.56	599.68
1O	40+14.36	-69.33	599.74	599.83
1P	40+24.35	-68.80	599.92	599.98
1Q	40+34.33	-68.27	600.10	600.14
⌒ BRG. PIER 1 WB	40+42.37	-67.84	600.24	600.26
1R	40+52.36	-67.30	600.40	600.42
1S	40+62.35	-66.77	600.57	600.58
1T	40+72.33	-66.24	600.73	600.74
1U	40+82.32	-65.70	600.88	600.91
1V	40+92.30	-65.17	601.04	601.08
1W	41+02.29	-64.64	601.18	601.24
1X	41+12.28	-64.10	601.33	601.40
1Y	41+22.26	-63.57	601.47	601.55
1Z	41+32.25	-63.04	601.60	601.70
1AA	41+42.23	-62.51	601.73	601.83
1AB	41+52.22	-61.97	601.86	601.96
1AC	41+62.20	-61.44	601.99	602.07
1AD	41+72.19	-60.91	602.11	602.18
1AE	41+82.18	-60.37	602.22	602.28
1AF	41+92.16	-59.84	602.33	602.37
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-59.48	602.41	602.43
⌒ PIER 2 WB	42+01.21	-59.36	602.43	602.45

PROP. BL CENTER RAMP C

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+59.01	-73.71	596.96	596.98
⌒ EXP. JT.	38+60.75	-73.61	596.99	597.01
⌒ BRG. W. ABUT. WB	38+63.01	-73.49	597.03	597.05
1A	38+73.00	-72.96	597.22	597.30
1B	38+82.98	-72.43	597.41	597.54
1C	38+92.97	-71.90	597.59	597.76
1D	39+02.96	-71.37	597.76	597.98
1E	39+12.94	-70.84	597.94	598.18
1F	39+22.93	-70.31	598.10	598.37
1G	39+32.91	-69.78	598.27	598.55
1H	39+42.90	-69.25	598.46	598.73
1I	39+52.89	-68.72	598.64	598.92
1J	39+62.87	-68.19	598.84	599.08
1K	39+72.86	-67.66	599.04	599.26
1L	39+82.84	-67.14	599.23	599.42
1M	39+92.83	-66.61	599.42	599.58
1N	40+02.81	-66.08	599.61	599.73
1O	40+12.80	-65.55	599.79	599.88
1P	40+22.79	-65.02	599.97	600.03
1Q	40+32.77	-64.49	600.15	600.19
⌒ BRG. PIER 1 WB	40+40.72	-64.06	600.29	600.31
1R	40+50.70	-63.53	600.45	600.47
1S	40+60.69	-63.00	600.62	600.63
1T	40+70.67	-62.47	600.78	600.79
1U	40+80.66	-61.94	600.93	600.96
1V	40+90.64	-61.41	601.09	601.13
1W	41+00.63	-60.88	601.24	601.29
1X	41+10.62	-60.35	601.38	601.45
1Y	41+20.60	-59.82	601.52	601.60
1Z	41+30.59	-59.29	601.66	601.75
1AA	41+40.57	-58.76	601.79	601.89
1AB	41+50.56	-58.23	601.92	602.01
1AC	41+60.55	-57.71	602.04	602.13
1AD	41+70.53	-57.18	602.16	602.24
1AE	41+80.52	-56.65	602.28	602.34
1AF	41+90.50	-56.12	602.39	602.43
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-55.67	602.48	602.50
⌒ PIER 2 WB	42+01.21	-55.55	602.51	602.53

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 1 - UNIT 1 WB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -			I-80	FAI 80 21 STRUCTURE 2	WILL	1230	611
		PLOT SCALE = 8:0' = 1" / in.	DRAWN - GM	REVISED -			CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -			SHEET 5-30 OF 5-333 SHEETS				
											ILLINOIS

GIRDER W2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+56.53	-67.82	597.03	597.05
C EXP. JT.	38+58.27	-67.74	597.06	597.08
C BRG. W. ABUT. WB	38+60.54	-67.63	597.11	597.13
1A	38+70.53	-67.17	597.29	597.37
1B	38+80.52	-66.70	597.48	597.61
1C	38+90.51	-66.23	597.66	597.84
1D	39+00.50	-65.76	597.83	598.06
1E	39+10.48	-65.29	598.01	598.26
1F	39+20.47	-64.82	598.17	598.45
1G	39+30.46	-64.36	598.34	598.63
1H	39+40.45	-63.89	598.52	598.81
1I	39+50.44	-63.42	598.70	598.99
1J	39+60.43	-62.95	598.89	599.15
1K	39+70.42	-62.48	599.09	599.32
1L	39+80.41	-62.01	599.29	599.48
1M	39+90.40	-61.55	599.48	599.64
1N	40+00.39	-61.08	599.67	599.79
1O	40+10.38	-60.61	599.85	599.94
1P	40+20.36	-60.14	600.03	600.09
1Q	40+30.35	-59.67	600.21	600.24
C BRG. PIER 1 WB	40+38.66	-59.28	600.35	600.37
1R	40+48.65	-58.81	600.52	600.53
1S	40+58.64	-58.35	600.68	600.69
1T	40+68.63	-57.88	600.84	600.86
1U	40+78.62	-57.41	601.00	601.03
1V	40+88.61	-56.94	601.15	601.19
1W	40+98.60	-56.47	601.30	601.36
1X	41+08.58	-56.00	601.44	601.52
1Y	41+18.57	-55.54	601.58	601.67
1Z	41+28.56	-55.07	601.72	601.82
1AA	41+38.55	-54.60	601.85	601.95
1AB	41+48.54	-54.13	601.98	602.08
1AC	41+58.53	-53.66	602.10	602.20
1AD	41+68.52	-53.19	602.22	602.31
1AE	41+78.51	-52.73	602.34	602.40
1AF	41+88.50	-52.26	602.45	602.49
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
C W. BRG. PIER 2 WB	41+98.96	-51.77	602.56	602.58
C PIER 2 WB	42+01.21	-51.66	602.59	602.61

GIRDER W3

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+52.31	-58.10	597.15	597.17
C EXP. JT.	38+54.05	-58.03	597.18	597.20
C BRG. W. ABUT. WB	38+56.33	-57.94	597.22	597.24
1A	38+66.32	-57.53	597.41	597.49
1B	38+76.31	-57.13	597.60	597.72
1C	38+86.30	-56.73	597.78	597.95
1D	38+96.29	-56.32	597.95	598.17
1E	39+06.29	-55.92	598.13	598.37
1F	39+16.28	-55.51	598.29	598.56
1G	39+26.27	-55.11	598.46	598.74
1H	39+36.26	-54.70	598.63	598.90
1I	39+46.25	-54.30	598.81	599.09
1J	39+56.25	-53.89	598.99	599.24
1K	39+66.24	-53.49	599.19	599.41
1L	39+76.23	-53.08	599.39	599.58
1M	39+86.22	-52.68	599.58	599.73
1N	39+96.21	-52.27	599.77	599.89
1O	40+06.20	-51.87	599.95	600.04
1P	40+16.20	-51.46	600.13	600.19
1Q	40+26.19	-51.06	600.31	600.35
C BRG. PIER 1 WB	40+34.93	-50.70	600.46	600.48
1R	40+44.92	-50.30	600.63	600.64
1S	40+54.91	-49.89	600.79	600.81
1T	40+64.91	-49.49	600.95	600.97
1U	40+74.90	-49.08	601.11	601.14
1V	40+84.89	-48.68	601.26	601.31
1W	40+94.88	-48.27	601.41	601.48
1X	41+04.87	-47.87	601.55	601.64
1Y	41+14.87	-47.46	601.69	601.79
1Z	41+24.86	-47.06	601.83	601.94
1AA	41+34.85	-46.65	601.96	602.08
1AB	41+44.84	-46.25	602.09	602.20
1AC	41+54.83	-45.84	602.21	602.32
1AD	41+64.82	-45.44	602.34	602.43
1AE	41+74.82	-45.04	602.45	602.53
1AF	41+84.81	-44.63	602.56	602.62
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
C W. BRG. PIER 2 WB	41+98.96	-44.06	602.72	602.74
C PIER 2 WB	42+01.21	-43.97	602.74	602.76

NORTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+47.91	-48.00	597.27	597.29
C EXP. JT.	38+50.23	-48.00	597.31	597.33
C BRG. W. ABUT. WB	38+52.00	-48.00	597.34	597.36
1A	38+62.00	-48.00	597.52	597.60
1B	38+72.00	-48.00	597.70	597.83
1C	38+82.00	-48.00	597.88	598.05
1D	38+92.00	-48.00	598.05	598.25
1E	39+02.00	-48.00	598.21	598.45
1F	39+12.00	-48.00	598.38	598.63
1G	39+22.00	-48.00	598.54	598.80
1H	39+32.00	-48.00	598.69	598.95
1I	39+42.00	-48.00	598.87	599.13
1J	39+52.00	-48.00	599.04	599.27
1K	39+62.00	-48.00	599.22	599.43
1L	39+72.00	-48.00	599.41	599.59
1M	39+82.00	-48.00	599.60	599.74
1N	39+92.00	-48.00	599.78	599.89
1O	40+02.00	-48.00	599.96	600.04
1P	40+12.00	-48.00	600.13	600.19
1Q	40+22.00	-48.00	600.30	600.34
C BRG. PIER 1 WB	40+33.75	-48.00	600.49	600.52
1R	40+43.75	-48.00	600.65	600.67
1S	40+53.75	-48.00	600.81	600.83
1T	40+63.75	-48.00	600.96	600.99
1U	40+73.75	-48.00	601.11	601.15
1V	40+83.75	-48.00	601.26	601.31
1W	40+93.75	-48.00	601.40	601.47
1X	41+03.75	-48.00	601.54	601.63
1Y	41+13.75	-48.00	601.67	601.77
1Z	41+23.75	-48.00	601.80	601.91
1AA	41+33.75	-48.00	601.92	602.05
1AB	41+43.75	-48.00	602.04	602.17
1AC	41+53.75	-48.00	602.16	602.28
1AD	41+63.75	-48.00	602.27	602.38
1AE	41+73.75	-48.00	602.38	602.47
1AF	41+83.75	-48.00	602.49	602.55
1AG	41+93.75	-48.00	602.59	602.63
1AH	-	-	-	-
1AI	-	-	-	-
C W. BRG. PIER 2 WB	41+98.96	-48.00	602.64	602.66
C PIER 2 WB	42+01.21	-48.00	602.66	602.68

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

Model Default: p:\projects\trans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CH401\401180022\03-WSP\Structure\0998309-42R23-S204-25W104.dgn
FILE NAME: p:\projects\trans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CH401\401180022\03-WSP\Structure\0998309-42R23-S204-25W104.dgn

GIRDER W4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+48.08	-48.38	597.26	597.28
⌒ EXP. JT.	38+49.83	-48.32	597.30	597.32
⌒ BRG. W. ABUT. WB	38+52.11	-48.25	597.34	597.36
1A	38+62.11	-47.90	597.53	597.60
1B	38+72.10	-47.56	597.71	597.83
1C	38+82.09	-47.22	597.88	598.05
1D	38+92.09	-46.87	598.06	598.26
1E	39+02.08	-46.53	598.23	598.46
1F	39+12.08	-46.19	598.40	598.65
1G	39+22.07	-45.85	598.56	598.83
1H	39+32.07	-45.50	598.73	598.99
1I	39+42.06	-45.16	598.92	599.18
1J	39+52.05	-44.82	599.10	599.33
1K	39+62.05	-44.47	599.29	599.50
1L	39+72.04	-44.13	599.49	599.67
1M	39+82.04	-43.79	599.68	599.83
1N	39+92.03	-43.45	599.87	599.98
1O	40+02.02	-43.10	600.06	600.14
1P	40+12.02	-42.76	600.24	600.29
1Q	40+22.01	-42.42	600.41	600.45
⌒ BRG. PIER 1 WB	40+31.19	-42.10	600.57	600.59
1R	40+41.19	-41.76	600.74	600.76
1S	40+51.18	-41.42	600.90	600.92
1T	40+61.17	-41.07	601.06	601.09
1U	40+71.17	-40.73	601.22	601.26
1V	40+81.16	-40.39	601.37	601.43
1W	40+91.16	-40.04	601.52	601.59
1X	41+01.15	-39.70	601.67	601.76
1Y	41+11.14	-39.36	601.81	601.91
1Z	41+21.14	-39.02	601.94	602.06
1AA	41+31.13	-38.67	602.08	602.20
1AB	41+41.13	-38.33	602.20	602.33
1AC	41+51.12	-37.99	602.33	602.45
1AD	41+61.11	-37.64	602.45	602.56
1AE	41+71.11	-37.30	602.57	602.66
1AF	41+81.10	-36.96	602.68	602.75
1AG	41+91.10	-36.62	602.79	602.83
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-36.35	602.87	602.89
⌒ PIER 2 WB	42+01.21	-36.27	602.89	602.91

SOUTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+42.69	-36.00	597.12	597.14
⌒ EXP. JT.	38+45.01	-36.00	597.17	597.19
⌒ BRG. W. ABUT. WB	38+46.78	-36.00	597.21	597.23
1A	38+56.78	-36.00	597.42	597.49
1B	38+66.78	-36.00	597.63	597.74
1C	38+76.78	-36.00	597.83	597.99
1D	38+86.78	-36.00	598.03	598.22
1E	38+96.78	-36.00	598.22	598.44
1F	39+06.78	-36.00	598.41	598.65
1G	39+16.78	-36.00	598.60	598.85
1H	39+26.78	-36.00	598.78	599.03
1I	39+36.78	-36.00	598.97	599.22
1J	39+46.78	-36.00	599.17	599.39
1K	39+56.78	-36.00	599.36	599.56
1L	39+66.78	-36.00	599.55	599.72
1M	39+76.78	-36.00	599.74	599.88
1N	39+86.78	-36.00	599.93	600.03
1O	39+96.78	-36.00	600.11	600.18
1P	40+06.78	-36.00	600.28	600.33
1Q	40+16.78	-36.00	600.45	600.49
⌒ BRG. PIER 1 WB	40+28.53	-36.00	600.65	600.67
1R	40+38.53	-36.00	600.81	600.83
1S	40+48.53	-36.00	600.97	600.99
1T	40+58.53	-36.00	601.13	601.16
1U	40+68.53	-36.00	601.28	601.32
1V	40+78.53	-36.00	601.42	601.49
1W	40+88.53	-36.00	601.57	601.65
1X	40+98.53	-36.00	601.70	601.81
1Y	41+08.53	-36.00	601.84	601.96
1Z	41+18.53	-36.00	601.97	602.10
1AA	41+28.53	-36.00	602.10	602.24
1AB	41+38.53	-36.00	602.22	602.36
1AC	41+48.53	-36.00	602.34	602.47
1AD	41+58.53	-36.00	602.45	602.58
1AE	41+68.53	-36.00	602.56	602.67
1AF	41+78.53	-36.00	602.67	602.75
1AG	41+88.53	-36.00	602.77	602.83
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-36.00	602.88	602.90
⌒ PIER 2 WB	42+01.21	-36.00	602.90	602.92

GIRDER W5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+43.86	-38.67	597.16	597.18
⌒ EXP. JT.	38+45.61	-38.62	597.19	597.21
⌒ BRG. W. ABUT. WB	38+47.90	-38.55	597.24	597.26
1A	38+57.89	-38.27	597.44	597.51
1B	38+67.89	-37.99	597.64	597.76
1C	38+77.89	-37.71	597.84	598.00
1D	38+87.88	-37.42	598.04	598.23
1E	38+97.88	-37.14	598.23	598.45
1F	39+07.87	-36.86	598.42	598.66
1G	39+17.87	-36.58	598.61	598.86
1H	39+27.87	-36.29	598.79	599.04
1I	39+37.86	-36.01	598.99	599.24
1J	39+47.86	-35.73	599.19	599.41
1K	39+57.85	-35.45	599.39	599.59
1L	39+67.85	-35.16	599.59	599.75
1M	39+77.85	-34.88	599.78	599.91
1N	39+87.84	-34.60	599.97	600.07
1O	39+97.84	-34.32	600.15	600.23
1P	40+07.83	-34.03	600.33	600.38
1Q	40+17.83	-33.75	600.50	600.54
⌒ BRG. PIER 1 WB	40+27.44	-33.48	600.67	600.69
1R	40+37.44	-33.20	600.84	600.86
1S	40+47.43	-32.92	601.00	601.02
1T	40+57.43	-32.63	601.16	601.19
1U	40+67.43	-32.35	601.31	601.36
1V	40+77.42	-32.07	601.47	601.53
1W	40+87.42	-31.79	601.61	601.70
1X	40+97.41	-31.50	601.76	601.86
1Y	41+07.41	-31.22	601.90	602.01
1Z	41+17.41	-30.94	602.03	602.16
1AA	41+27.40	-30.66	602.16	602.30
1AB	41+37.40	-30.37	602.29	602.43
1AC	41+47.39	-30.09	602.41	602.55
1AD	41+57.39	-29.81	602.53	602.66
1AE	41+67.39	-29.53	602.65	602.75
1AF	41+77.38	-29.25	602.76	602.84
1AG	41+87.38	-28.96	602.87	602.92
1AH	-	-	-	-
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-28.64	602.99	603.01
⌒ PIER 2 WB	42+01.21	-28.57	603.01	603.03

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 8'0" = 1" / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 3 - UNIT 1 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-32 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	613
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\wsp\transystems-pw\hntb\transystems-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5205-DEW\05.dgn

GIRDER W6				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+39.63	-28.95	597.02	597.04
⌒ EXP. JT.	38+41.39	-28.91	597.06	597.08
⌒ BRG. W. ABUT. WB	38+43.68	-28.86	597.12	597.14
1A	38+53.68	-28.64	597.34	597.41
1B	38+63.68	-28.41	597.57	597.69
1C	38+73.68	-28.19	597.79	597.95
1D	38+83.67	-27.97	598.00	598.20
1E	38+93.67	-27.74	598.22	598.44
1F	39+03.67	-27.52	598.43	598.67
1G	39+13.67	-27.30	598.63	598.89
1H	39+23.66	-27.07	598.84	599.09
1I	39+33.66	-26.85	599.04	599.29
1J	39+43.66	-26.63	599.25	599.47
1K	39+53.66	-26.40	599.45	599.64
1L	39+63.65	-26.18	599.64	599.81
1M	39+73.65	-25.96	599.83	599.97
1N	39+83.65	-25.73	600.02	600.13
1O	39+93.65	-25.51	600.21	600.28
1P	40+03.64	-25.29	600.39	600.44
1Q	40+13.64	-25.06	600.56	600.60
⌒ BRG. PIER 1 WB	40+23.69	-24.84	600.74	600.76
1R	40+33.68	-24.62	600.90	600.93
1S	40+43.68	-24.39	601.07	601.09
1T	40+53.68	-24.17	601.23	601.26
1U	40+63.68	-23.95	601.38	601.44
1V	40+73.67	-23.72	601.54	601.61
1W	40+83.67	-23.50	601.68	601.78
1X	40+93.67	-23.28	601.83	601.94
1Y	41+03.67	-23.05	601.97	602.10
1Z	41+13.66	-22.83	602.10	602.25
1AA	41+23.66	-22.61	602.24	602.39
1AB	41+33.66	-22.38	602.36	602.52
1AC	41+43.66	-22.16	602.49	602.64
1AD	41+53.65	-21.94	602.61	602.75
1AE	41+63.65	-21.71	602.73	602.85
1AF	41+73.65	-21.49	602.84	602.94
1AG	41+83.65	-21.27	602.95	603.02
1AH	41+93.64	-21.04	603.05	603.09
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-20.93	603.10	603.12
⌒ PIER 2 WB	42+01.21	-20.87	603.13	603.15

CROWN - WB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+37.48	-24.00	596.95	596.97
⌒ EXP. JT.	38+39.79	-24.00	597.01	597.03
⌒ BRG. W. ABUT. WB	38+41.57	-24.00	597.05	597.07
1A	38+51.57	-24.00	597.29	597.36
1B	38+61.57	-24.00	597.52	597.64
1C	38+71.57	-24.00	597.75	597.91
1D	38+81.57	-24.00	597.97	598.17
1E	38+91.57	-24.00	598.20	598.42
1F	39+01.57	-24.00	598.41	598.66
1G	39+11.57	-24.00	598.63	598.88
1H	39+21.57	-24.00	598.84	599.09
1I	39+31.57	-24.00	599.04	599.29
1J	39+41.57	-24.00	599.24	599.47
1K	39+51.57	-24.00	599.44	599.64
1L	39+61.57	-24.00	599.64	599.80
1M	39+71.57	-24.00	599.82	599.96
1N	39+81.57	-24.00	600.01	600.11
1O	39+91.57	-24.00	600.19	600.27
1P	40+01.57	-24.00	600.37	600.42
1Q	40+11.57	-24.00	600.54	600.58
⌒ BRG. PIER 1 WB	40+23.32	-24.00	600.74	600.76
1R	40+33.32	-24.00	600.91	600.93
1S	40+43.32	-24.00	601.07	601.09
1T	40+53.32	-24.00	601.22	601.26
1U	40+63.32	-24.00	601.38	601.43
1V	40+73.32	-24.00	601.53	601.60
1W	40+83.32	-24.00	601.67	601.77
1X	40+93.32	-24.00	601.81	601.93
1Y	41+03.32	-24.00	601.95	602.08
1Z	41+13.32	-24.00	602.08	602.23
1AA	41+23.32	-24.00	602.21	602.37
1AB	41+33.32	-24.00	602.34	602.50
1AC	41+43.32	-24.00	602.46	602.61
1AD	41+53.32	-24.00	602.57	602.72
1AE	41+63.32	-24.00	602.69	602.81
1AF	41+73.32	-24.00	602.80	602.90
1AG	41+83.32	-24.00	602.90	602.97
1AH	41+93.32	-24.00	603.00	603.04
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-24.00	603.06	603.08
⌒ PIER 2 WB	42+01.21	-24.00	603.08	603.10

GIRDER W7				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+35.41	-19.23	596.83	596.85
⌒ EXP. JT.	38+37.17	-19.20	596.87	596.89
⌒ BRG. W. ABUT. WB	38+39.47	-19.16	596.92	596.95
1A	38+49.47	-19.00	597.16	597.23
1B	38+59.46	-18.83	597.39	597.51
1C	38+69.46	-18.67	597.62	597.78
1D	38+79.46	-18.50	597.84	598.04
1E	38+89.46	-18.34	598.06	598.29
1F	38+99.46	-18.17	598.28	598.52
1G	39+09.46	-18.01	598.49	598.74
1H	39+19.46	-17.84	598.70	598.95
1I	39+29.46	-17.68	598.90	599.15
1J	39+39.45	-17.51	599.10	599.32
1K	39+49.45	-17.34	599.30	599.50
1L	39+59.45	-17.18	599.49	599.66
1M	39+69.45	-17.01	599.68	599.81
1N	39+79.45	-16.85	599.86	599.97
1O	39+89.45	-16.68	600.04	600.12
1P	39+99.45	-16.52	600.22	600.27
1Q	40+09.44	-16.35	600.39	600.43
⌒ BRG. PIER 1 WB	40+19.92	-16.18	600.57	600.59
1R	40+29.92	-16.01	600.73	600.76
1S	40+39.92	-15.85	600.89	600.92
1T	40+49.92	-15.68	601.05	601.09
1U	40+59.91	-15.52	601.20	601.26
1V	40+69.91	-15.35	601.35	601.43
1W	40+79.91	-15.19	601.49	601.60
1X	40+89.91	-15.02	601.63	601.76
1Y	40+99.91	-14.85	601.77	601.92
1Z	41+09.91	-14.69	601.90	602.07
1AA	41+19.91	-14.52	602.03	602.21
1AB	41+29.90	-14.36	602.15	602.34
1AC	41+39.90	-14.19	602.27	602.45
1AD	41+49.90	-14.03	602.39	602.55
1AE	41+59.90	-13.86	602.50	602.65
1AF	41+69.90	-13.70	602.60	602.73
1AG	41+79.90	-13.53	602.71	602.80
1AH	41+89.90	-13.36	602.81	602.86
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-13.21	602.90	602.92
⌒ PIER 2 WB	42+01.21	-13.18	602.92	602.94

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\proj\transystems-pw\hntb\com\transys\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-S2\06-DEVI\06.dgn

NORTH EDGE OF SOUTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+32.26	-12.00	596.64	596.66
⌒ EXP. JT.	38+34.58	-12.00	596.70	596.72
⌒ BRG. W. ABUT. WB	38+36.35	-12.00	596.74	596.76
1A	38+46.35	-12.00	596.98	597.05
1B	38+56.35	-12.00	597.22	597.34
1C	38+66.35	-12.00	597.45	597.62
1D	38+76.35	-12.00	597.68	597.88
1E	38+86.35	-12.00	597.90	598.13
1F	38+96.35	-12.00	598.12	598.37
1G	39+06.35	-12.00	598.34	598.59
1H	39+16.35	-12.00	598.55	598.80
1I	39+26.35	-12.00	598.76	599.00
1J	39+36.35	-12.00	598.96	599.18
1K	39+46.35	-12.00	599.16	599.36
1L	39+56.35	-12.00	599.35	599.52
1M	39+66.35	-12.00	599.55	599.68
1N	39+76.35	-12.00	599.73	599.84
1O	39+86.35	-12.00	599.92	599.99
1P	39+96.35	-12.00	600.10	600.15
1Q	40+06.35	-12.00	600.27	600.31
⌒ BRG. PIER 1 WB	40+18.10	-12.00	600.47	600.50
1R	40+28.10	-12.00	600.64	600.67
1S	40+38.10	-12.00	600.80	600.84
1T	40+48.10	-12.00	600.96	601.01
1U	40+58.10	-12.00	601.12	601.19
1V	40+68.10	-12.00	601.27	601.37
1W	40+78.10	-12.00	601.42	601.54
1X	40+88.10	-12.00	601.56	601.71
1Y	40+98.10	-12.00	601.70	601.88
1Z	41+08.10	-12.00	601.83	602.03
1AA	41+18.10	-12.00	601.96	602.17
1AB	41+28.10	-12.00	602.09	602.31
1AC	41+38.10	-12.00	602.21	602.43
1AD	41+48.10	-12.00	602.33	602.54
1AE	41+58.10	-12.00	602.45	602.63
1AF	41+68.10	-12.00	602.56	602.71
1AG	41+78.10	-12.00	602.67	602.78
1AH	41+88.10	-12.00	602.77	602.85
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-12.00	602.88	602.90
⌒ PIER 2 WB	42+01.21	-12.00	602.90	602.92

GIRDER W8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+31.18	-9.52	596.57	596.59
⌒ EXP. JT.	38+32.95	-9.50	596.61	596.63
⌒ BRG. W. ABUT. WB	38+35.25	-9.47	596.66	596.69
1A	38+45.25	-9.36	596.90	596.98
1B	38+55.25	-9.25	597.14	597.26
1C	38+65.25	-9.14	597.37	597.53
1D	38+75.25	-9.03	597.59	597.80
1E	38+85.25	-8.93	597.81	598.05
1F	38+95.25	-8.82	598.03	598.28
1G	39+05.25	-8.71	598.25	598.51
1H	39+15.25	-8.60	598.46	598.71
1I	39+25.25	-8.49	598.66	598.91
1J	39+35.25	-8.38	598.86	599.09
1K	39+45.25	-8.27	599.06	599.26
1L	39+55.25	-8.16	599.26	599.42
1M	39+65.25	-8.05	599.45	599.58
1N	39+75.24	-7.94	599.63	599.73
1O	39+85.24	-7.84	599.81	599.89
1P	39+95.24	-7.73	599.99	600.04
1Q	40+05.24	-7.62	600.17	600.20
⌒ BRG. PIER 1 WB	40+16.14	-7.50	600.35	600.37
1R	40+26.14	-7.39	600.52	600.54
1S	40+36.14	-7.28	600.68	600.71
1T	40+46.14	-7.17	600.84	600.89
1U	40+56.14	-7.06	600.99	601.06
1V	40+66.14	-6.95	601.14	601.24
1W	40+76.14	-6.84	601.29	601.41
1X	40+86.14	-6.73	601.43	601.58
1Y	40+96.14	-6.63	601.56	601.74
1Z	41+06.14	-6.52	601.70	601.90
1AA	41+16.14	-6.41	601.83	602.04
1AB	41+26.14	-6.30	601.95	602.17
1AC	41+36.14	-6.19	602.07	602.29
1AD	41+46.14	-6.08	602.19	602.39
1AE	41+56.14	-5.97	602.31	602.49
1AF	41+66.14	-5.86	602.42	602.57
1AG	41+76.14	-5.75	602.52	602.64
1AH	41+86.13	-5.64	602.62	602.70
1AI	-	-	-	-
⌒ W. BRG. PIER 2 WB	41+98.96	-5.50	602.75	602.77
⌒ PIER 2 WB	42+01.21	-5.48	602.77	602.79

PGL I-80 WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. WB	38+27.04	0.00	596.28	596.30
⌒ EXP. JT.	38+29.36	0.00	596.33	596.35
⌒ BRG. W. ABUT. WB	38+31.13	0.00	596.38	596.40
1A	38+41.13	0.00	596.62	596.69
1B	38+51.13	0.00	596.85	596.98
1C	38+61.13	0.00	597.09	597.26
1D	38+71.13	0.00	597.32	597.52
1E	38+81.13	0.00	597.54	597.78
1F	38+91.13	0.00	597.77	598.02
1G	39+01.13	0.00	597.98	598.24
1H	39+11.13	0.00	598.20	598.45
1I	39+21.13	0.00	598.41	598.65
1J	39+31.13	0.00	598.61	598.84
1K	39+41.13	0.00	598.82	599.01
1L	39+51.13	0.00	599.01	599.18
1M	39+61.13	0.00	599.21	599.34
1N	39+71.13	0.00	599.40	599.50
1O	39+81.13	0.00	599.58	599.65
1P	39+91.13	0.00	599.76	599.81
1Q	40+01.13	0.00	599.94	599.97
⌒ BRG. PIER 1 WB	40+12.88	0.00	600.15	600.17
1R	40+22.88	0.00	600.31	600.34
1S	40+32.88	0.00	600.48	600.52
1T	40+42.88	0.00	600.64	600.70
1U	40+52.88	0.00	600.80	600.88
1V	40+62.88	0.00	600.95	601.07
1W	40+72.88	0.00	601.10	601.25
1X	40+82.88	0.00	601.25	601.42
1Y	40+92.88	0.00	601.39	601.59
1Z	41+02.88	0.00	601.52	601.75
1AA	41+12.88	0.00	601.66	601.90
1AB	41+22.88	0.00	601.79	602.04
1AC	41+32.88	0.00	601.91	602.16
1AD	41+42.88	0.00	602.03	602.27
1AE	41+52.88	0.00	602.15	602.36
1AF	41+62.88	0.00	602.26	602.45
1AG	41+72.88	0.00	602.37	602.52
1AH	41+82.88	0.00	602.48	602.58
1AI	41+92.88	0.00	602.58	602.63
⌒ W. BRG. PIER 2 WB	41+98.96	0.00	602.64	602.66
⌒ PIER 2 WB	42+01.21	0.00	602.66	602.68

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 8:0' " / in.
PLOT DATE	= 11/5/2025

DESIGNED	-	LAS
CHECKED	-	PJL
DRAWN	-	GM
CHECKED	-	LAS


REVISED	-
REVISED	-
REVISED	-
REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


TOP OF SLAB ELEVATIONS 5 - UNIT 1 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-34 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	615
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

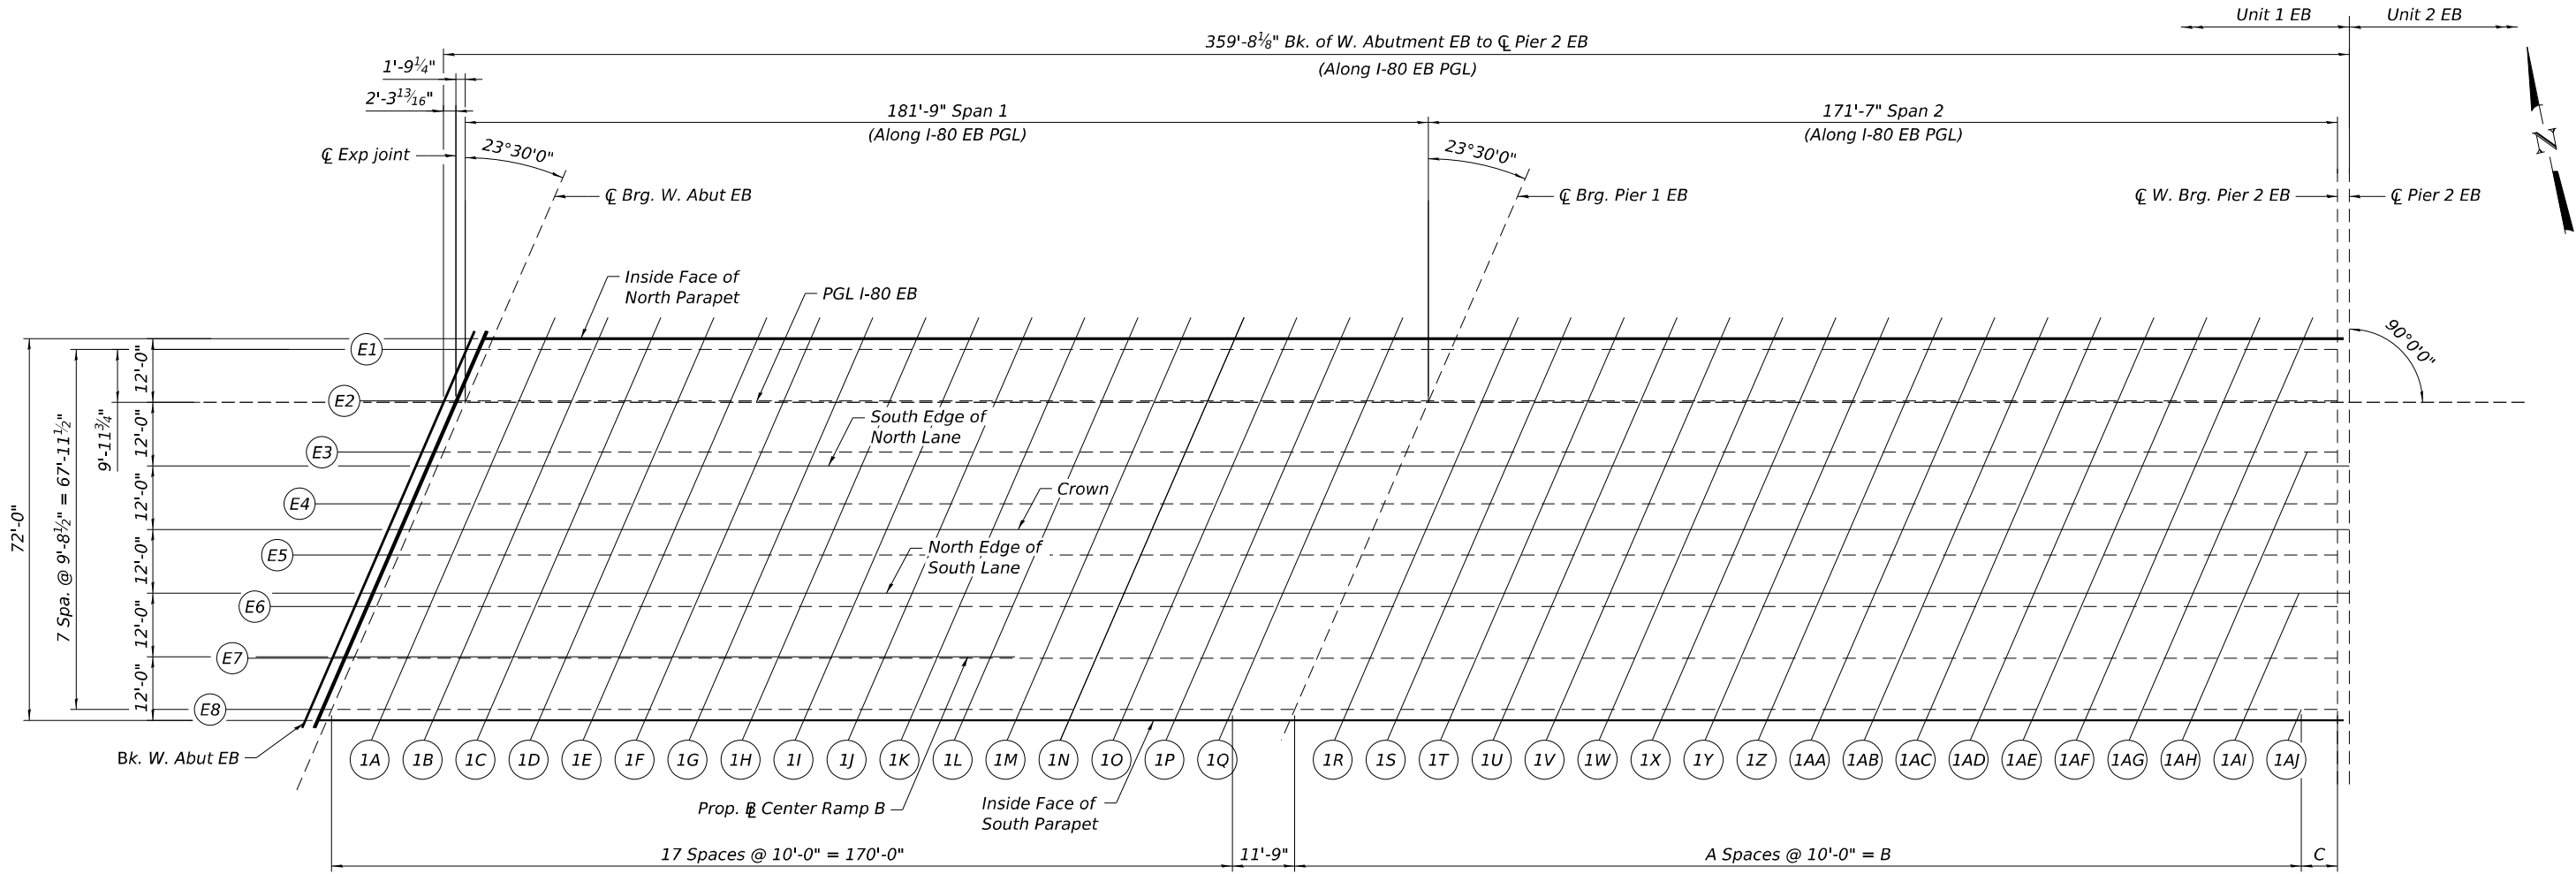

PLAN - UNIT 1 EB

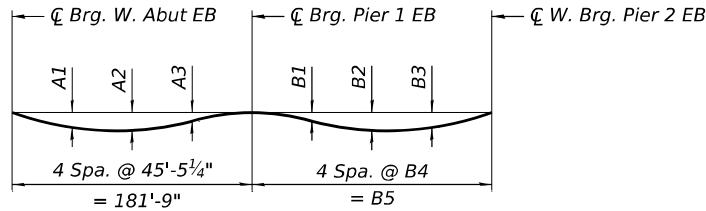


DEAD LOAD DEFLECTION DIAGRAM

(Includes weight of concrete only.)

Note:

The above deflections are not to be used in the field if the engineer is working from the grade elevations adjusted for dead load deflections and grinding as shown on sheets S-37 to S-41.

Girder	DEAD LOAD DEFLECTIONS							
	Span 1			Span 2				
	A1	A2	A3	B1	B2	B3	B4	B5
E1	2 ⁵ / ₈ "	3 ¹ / ₈ "	1 ³ / ₈ "	3 ³ / ₈ "	1 ³ / ₈ "	1 ¹ / ₄ "	41'-9 ³ / ₄ " (-)	167'-2 ⁵ / ₁₆ "
E2	2 ⁵ / ₈ "	3"	1 ³ / ₈ "	1 ¹ / ₂ "	1 ⁵ / ₈ "	1 ¹ / ₂ "	42'-10 ³ / ₈ " (+)	171'-5 ⁹ / ₁₆ "
E3	2 ¹ / ₂ "	2 ¹ / ₈ "	1 ¹ / ₄ "	5 ³ / ₈ "	1 ¹ / ₈ "	1 ³ / ₄ "	43'-11 ¹ / ₄ "	175'-8 ¹ / ₄ "
E4	2 ³ / ₈ "	2 ⁵ / ₈ "	1"	7 ³ / ₈ "	2 ¹ / ₄ "	2"	44'-11 ³ / ₄ " (-)	179'-10 ⁷ / ₈ "
E5	2 ¹ / ₄ "	2 ¹ / ₂ "	1"	1"	2 ⁵ / ₈ "	2 ¹ / ₄ "	46'-0 ³ / ₈ " (+)	184'-1 ⁹ / ₁₆ "
E6	2 ¹ / ₄ "	2 ¹ / ₂ "	7 ³ / ₈ "	1 ¹ / ₄ "	3"	2 ⁵ / ₈ "	47'-1" (+)	188'-4 ³ / ₁₆ "
E7	2 ¹ / ₄ "	2 ³ / ₈ "	7 ³ / ₈ "	1 ¹ / ₂ "	3 ³ / ₈ "	3"	48'-1 ³ / ₄ " (-)	192'-6 ⁷ / ₈ "
E8	2 ¹ / ₈ "	2 ¹ / ₄ "	3 ³ / ₄ "	1 ³ / ₄ "	3 ⁷ / ₈ "	3 ¹ / ₄ "	49'-2 ³ / ₈ "	196'-9 ¹ / ₂ "



FILLET HEIGHTS

To determine "t": After all structural steel has been erected, elevations of the top flanges of the beams shall be taken at intervals shown. These elevations subtracted from the "Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding" shown on sheets S-37 to S-41, minus the initial slab thickness prior to grinding, equals the fillet heights "t" above top flange of beams.

The slab is to be ground after curing to achieve smoothness, but the slab is not to be ground to elevations below the "Theoretical Grade Elevations" shown on sheets S-37 to S-41. For grinding the deck, see Special Provisions.

TOP OF SLAB DIMENSIONS TABLE - UNIT 1 EB

Girder	A	B	C
E1	16	160'-0"	7'-2 ¹⁵ / ₁₆ "
E2	16	160'-0"	11'-5 ⁹ / ₁₆ "
E3	17	170'-0"	5'-8 ¹ / ₄ "
E4	17	170'-0"	9'-10 ⁷ / ₈ "
E5	17	170'-0"	14'-1 ⁹ / ₁₆ "
E6	18	180'-0"	8'-4 ³ / ₁₆ "
E7	18	180'-0"	12'-6 ⁷ / ₈ "
E8	19	190'-0"	6'-9 ¹ / ₂ "

NOTES:

- The dead load deflections shown in the diagram and used for fillet height determination are based on the Deck Pouring Sequence shown on sheet S-109.
- If the Contractor elects to use a different pour placement/hardening schedule, then the deflections and fillet heights shall be re-calculated.
- The cost of re-calculating deflections and adjusting fillet heights shall be included in the cost of Concrete Superstructure.
- Up to 1/4 inch to be ground off the bridge deck and the bridge approach slabs. The Profile Grade shows the final grade after grinding.

MODEL Default: wsp\transystems-pw-jantley.com\transystems-pw-labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62023-RB-1-Sheets\Structural\0998309-42R23-S208-DEE101.dgn
FILE NAME: pw\transystems-pw-jantley.com\transystems-pw-labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62023-RB-1-Sheets\Structural\0998309-42R23-S208-DEE101.dgn



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 400
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
CHECKED - PJL	REVIS	
PLOT SCALE = 32:0 " = 1"	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION PLAN - UNIT 1 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-36 OF S-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	617
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

Model Default:
File Name: p:\projects\trans\systems-pw\hntb\comtrans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5209-DEE102.dgn

INSIDE FACE OF NORTH PARAPET - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+14.00	-12.00	595.71	595.73
⌒ EXP. JT.	38+16.32	-12.00	595.77	595.79
⌒ BRG. W. ABUT. EB	38+18.09	-12.00	595.81	595.83
1A	38+28.09	-12.00	596.06	596.14
1B	38+38.09	-12.00	596.30	596.44
1C	38+48.09	-12.00	596.54	596.72
1D	38+58.09	-12.00	596.78	597.00
1E	38+68.09	-12.00	597.01	597.26
1F	38+78.09	-12.00	597.24	597.51
1G	38+88.09	-12.00	597.46	597.75
1H	38+98.09	-12.00	597.68	597.96
1I	39+08.09	-12.00	597.89	598.17
1J	39+18.09	-12.00	598.10	598.36
1K	39+28.09	-12.00	598.31	598.54
1L	39+38.09	-12.00	598.51	598.71
1M	39+48.09	-12.00	598.71	598.87
1N	39+58.09	-12.00	598.91	599.03
1O	39+68.09	-12.00	599.10	599.19
1P	39+78.09	-12.00	599.29	599.35
1Q	39+88.09	-12.00	599.47	599.51
⌒ BRG. PIER 1 EB	39+99.84	-12.00	599.68	599.70
1R	40+09.84	-12.00	599.85	599.87
1S	40+19.84	-12.00	600.02	600.05
1T	40+29.84	-12.00	600.19	600.22
1U	40+39.84	-12.00	600.35	600.40
1V	40+49.84	-12.00	600.51	600.58
1W	40+59.84	-12.00	600.67	600.75
1X	40+69.84	-12.00	600.82	600.93
1Y	40+79.84	-12.00	600.96	601.09
1Z	40+89.84	-12.00	601.10	601.24
1AA	40+99.84	-12.00	601.24	601.39
1AB	41+09.84	-12.00	601.38	601.52
1AC	41+19.84	-12.00	601.51	601.64
1AD	41+29.84	-12.00	601.63	601.76
1AE	41+39.84	-12.00	601.76	601.86
1AF	41+49.84	-12.00	601.87	601.95
1AG	41+59.84	-12.00	601.99	602.03
1AH	-	-	-	-
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	-12.00	602.06	602.08
⌒ PIER 2 EB	41+68.45	-12.00	602.08	602.10

GIRDER E1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+13.12	-9.98	595.73	595.75
⌒ EXP. JT.	38+15.44	-9.98	595.79	595.81
⌒ BRG. W. ABUT. EB	38+17.21	-9.98	595.83	595.85
1A	38+27.21	-9.98	596.08	596.16
1B	38+37.21	-9.98	596.32	596.46
1C	38+47.21	-9.98	596.56	596.74
1D	38+57.21	-9.98	596.80	597.02
1E	38+67.21	-9.98	597.03	597.28
1F	38+77.21	-9.98	597.26	597.53
1G	38+87.21	-9.98	597.48	597.77
1H	38+97.21	-9.98	597.70	597.98
1I	39+07.21	-9.98	597.91	598.19
1J	39+17.21	-9.98	598.13	598.38
1K	39+27.21	-9.98	598.33	598.56
1L	39+37.21	-9.98	598.54	598.73
1M	39+47.21	-9.98	598.74	598.89
1N	39+57.21	-9.98	598.93	599.05
1O	39+67.21	-9.98	599.12	599.21
1P	39+77.21	-9.98	599.31	599.37
1Q	39+87.21	-9.98	599.49	599.53
⌒ BRG. PIER 1 EB	39+98.96	-9.98	599.70	599.72
1R	40+08.96	-9.98	599.88	599.90
1S	40+18.96	-9.98	600.05	600.07
1T	40+28.96	-9.98	600.22	600.25
1U	40+38.96	-9.98	600.38	600.43
1V	40+48.96	-9.98	600.54	600.61
1W	40+58.96	-9.98	600.69	600.78
1X	40+68.96	-9.98	600.84	600.95
1Y	40+78.96	-9.98	600.99	601.12
1Z	40+88.96	-9.98	601.13	601.27
1AA	40+98.96	-9.98	601.27	601.42
1AB	41+08.96	-9.98	601.41	601.55
1AC	41+18.96	-9.98	601.54	601.67
1AD	41+28.96	-9.98	601.66	601.79
1AE	41+38.96	-9.98	601.79	601.89
1AF	41+48.96	-9.98	601.90	601.98
1AG	41+58.96	-9.98	602.02	602.06
1AH	-	-	-	-
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	-9.98	602.10	602.12
⌒ PIER 2 EB	41+68.45	-9.98	602.12	602.14

GIRDER E2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+08.90	-0.27	595.82	595.84
⌒ EXP. JT.	38+11.22	-0.27	595.88	595.90
⌒ BRG. W. ABUT. EB	38+12.99	-0.27	595.92	595.94
1A	38+22.99	-0.27	596.17	596.25
1B	38+32.99	-0.27	596.42	596.55
1C	38+42.99	-0.27	596.66	596.84
1D	38+52.99	-0.27	596.89	597.12
1E	38+62.99	-0.27	597.13	597.38
1F	38+72.99	-0.27	597.36	597.63
1G	38+82.99	-0.27	597.58	597.87
1H	38+92.99	-0.27	597.80	598.09
1I	39+02.99	-0.27	598.02	598.29
1J	39+12.99	-0.27	598.23	598.48
1K	39+22.99	-0.27	598.44	598.67
1L	39+32.99	-0.27	598.65	598.84
1M	39+42.99	-0.27	598.85	599.00
1N	39+52.99	-0.27	599.04	599.16
1O	39+62.99	-0.27	599.24	599.32
1P	39+72.99	-0.27	599.43	599.48
1Q	39+82.99	-0.27	599.61	599.65
⌒ BRG. PIER 1 EB	39+94.74	-0.27	599.82	599.84
1R	40+04.74	-0.27	600.00	600.02
1S	40+14.74	-0.27	600.17	600.20
1T	40+24.74	-0.27	600.34	600.38
1U	40+34.74	-0.27	600.50	600.56
1V	40+44.74	-0.27	600.67	600.75
1W	40+54.74	-0.27	600.82	600.93
1X	40+64.74	-0.27	600.97	601.10
1Y	40+74.74	-0.27	601.12	601.27
1Z	40+84.74	-0.27	601.27	601.43
1AA	40+94.74	-0.27	601.41	601.58
1AB	41+04.74	-0.27	601.54	601.71
1AC	41+14.74	-0.27	601.68	601.84
1AD	41+24.74	-0.27	601.80	601.95
1AE	41+34.74	-0.27	601.93	602.05
1AF	41+44.74	-0.27	602.05	602.14
1AG	41+54.74	-0.27	602.17	602.23
1AH	-	-	-	-
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	-0.27	602.29	602.31
⌒ PIER 2 EB	41+68.45	-0.27	602.32	602.34

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 8'0" = 1" / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 1 - UNIT 1 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-37 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	618
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\comtrans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5210-DEE103.dgn

PGL I-80 EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+08.78	0.00	595.82	595.84
⌒ EXP. JT.	38+11.10	0.00	595.88	595.90
⌒ BRG. W. ABUT. EB	38+12.87	0.00	595.92	595.94
1A	38+22.87	0.00	596.17	596.25
1B	38+32.87	0.00	596.42	596.55
1C	38+42.87	0.00	596.66	596.84
1D	38+52.87	0.00	596.90	597.12
1E	38+62.87	0.00	597.13	597.38
1F	38+72.87	0.00	597.36	597.63
1G	38+82.87	0.00	597.58	597.87
1H	38+92.87	0.00	597.80	598.09
1I	39+02.87	0.00	598.02	598.30
1J	39+12.87	0.00	598.23	598.49
1K	39+22.87	0.00	598.44	598.67
1L	39+32.87	0.00	598.65	598.84
1M	39+42.87	0.00	598.85	599.00
1N	39+52.87	0.00	599.05	599.17
1O	39+62.87	0.00	599.24	599.33
1P	39+72.87	0.00	599.43	599.49
1Q	39+82.87	0.00	599.61	599.65
⌒ BRG. PIER 1 EB	39+94.62	0.00	599.83	599.85
1R	40+04.62	0.00	600.00	600.03
1S	40+14.62	0.00	600.18	600.20
1T	40+24.62	0.00	600.34	600.38
1U	40+34.62	0.00	600.51	600.57
1V	40+44.62	0.00	600.67	600.75
1W	40+54.62	0.00	600.83	600.93
1X	40+64.62	0.00	600.98	601.11
1Y	40+74.62	0.00	601.13	601.27
1Z	40+84.62	0.00	601.27	601.43
1AA	40+94.62	0.00	601.41	601.58
1AB	41+04.62	0.00	601.55	601.72
1AC	41+14.62	0.00	601.68	601.84
1AD	41+24.62	0.00	601.81	601.95
1AE	41+34.62	0.00	601.93	602.06
1AF	41+44.62	0.00	602.05	602.15
1AG	41+54.62	0.00	602.17	602.23
1AH	-	-	-	-
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	0.00	602.30	602.32
⌒ PIER 2 EB	41+68.45	0.00	602.32	602.34

GIRDER E3

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+04.68	9.44	595.61	595.63
⌒ EXP. JT.	38+06.99	9.44	595.67	595.70
⌒ BRG. W. ABUT. EB	38+08.77	9.44	595.72	595.74
1A	38+18.77	9.44	595.99	596.07
1B	38+28.77	9.44	596.26	596.39
1C	38+38.77	9.44	596.52	596.70
1D	38+48.77	9.44	596.78	597.00
1E	38+58.77	9.44	597.04	597.28
1F	38+68.77	9.44	597.29	597.55
1G	38+78.77	9.44	597.54	597.81
1H	38+88.77	9.44	597.78	598.05
1I	38+98.77	9.44	598.02	598.28
1J	39+08.77	9.44	598.25	598.49
1K	39+18.77	9.44	598.48	598.69
1L	39+28.77	9.44	598.71	598.89
1M	39+38.77	9.44	598.93	599.08
1N	39+48.77	9.44	599.15	599.26
1O	39+58.77	9.44	599.35	599.43
1P	39+68.77	9.44	599.54	599.59
1Q	39+78.77	9.44	599.73	599.76
⌒ BRG. PIER 1 EB	39+90.52	9.44	599.94	599.96
1R	40+00.52	9.44	600.12	600.14
1S	40+10.52	9.44	600.29	600.33
1T	40+20.52	9.44	600.46	600.51
1U	40+30.52	9.44	600.63	600.70
1V	40+40.52	9.44	600.79	600.88
1W	40+50.52	9.44	600.95	601.07
1X	40+60.52	9.44	601.10	601.25
1Y	40+70.52	9.44	601.25	601.42
1Z	40+80.52	9.44	601.40	601.58
1AA	40+90.52	9.44	601.54	601.73
1AB	41+00.52	9.44	601.68	601.87
1AC	41+10.52	9.44	601.81	602.00
1AD	41+20.52	9.44	601.94	602.12
1AE	41+30.52	9.44	602.07	602.22
1AF	41+40.52	9.44	602.19	602.31
1AG	41+50.52	9.44	602.31	602.39
1AH	41+60.52	9.44	602.42	602.47
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	9.44	602.49	602.51
⌒ PIER 2 EB	41+68.45	9.44	602.51	602.53

SOUTH EDGE OF NORTH LANE - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+03.56	12.00	595.55	595.57
⌒ EXP. JT.	38+05.88	12.00	595.62	595.64
⌒ BRG. W. ABUT. EB	38+07.65	12.00	595.67	595.69
1A	38+17.65	12.00	595.94	596.02
1B	38+27.65	12.00	596.22	596.34
1C	38+37.65	12.00	596.48	596.66
1D	38+47.65	12.00	596.75	596.96
1E	38+57.65	12.00	597.01	597.25
1F	38+67.65	12.00	597.27	597.53
1G	38+77.65	12.00	597.52	597.79
1H	38+87.65	12.00	597.77	598.04
1I	38+97.65	12.00	598.01	598.27
1J	39+07.65	12.00	598.25	598.49
1K	39+17.65	12.00	598.49	598.70
1L	39+27.65	12.00	598.72	598.90
1M	39+37.65	12.00	598.95	599.09
1N	39+47.65	12.00	599.18	599.29
1O	39+57.65	12.00	599.38	599.46
1P	39+67.65	12.00	599.57	599.62
1Q	39+77.65	12.00	599.76	599.79
⌒ BRG. PIER 1 EB	39+89.40	12.00	599.97	599.99
1R	39+99.40	12.00	600.15	600.18
1S	40+09.40	12.00	600.33	600.36
1T	40+19.40	12.00	600.50	600.54
1U	40+29.40	12.00	600.66	600.73
1V	40+39.40	12.00	600.83	600.92
1W	40+49.40	12.00	600.98	601.10
1X	40+59.40	12.00	601.14	601.28
1Y	40+69.40	12.00	601.29	601.45
1Z	40+79.40	12.00	601.44	601.62
1AA	40+89.40	12.00	601.58	601.77
1AB	40+99.40	12.00	601.72	601.91
1AC	41+09.40	12.00	601.85	602.04
1AD	41+19.40	12.00	601.98	602.15
1AE	41+29.40	12.00	602.11	602.26
1AF	41+39.40	12.00	602.23	602.35
1AG	41+49.40	12.00	602.35	602.43
1AH	41+59.40	12.00	602.46	602.51
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	41+66.20	12.00	602.54	602.56
⌒ PIER 2 EB	41+68.45	12.00	602.56	602.58

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

GIRDER E4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	38+00.46	19.15	595.38	595.40
C EXP. JT.	38+02.77	19.15	595.45	595.47
C BRG. W. ABUT. EB	38+04.55	19.15	595.50	595.52
1A	38+14.55	19.15	595.79	595.86
1B	38+24.55	19.15	596.08	596.20
1C	38+34.55	19.15	596.37	596.53
1D	38+44.55	19.15	596.65	596.85
1E	38+54.55	19.15	596.92	597.15
1F	38+64.55	19.15	597.20	597.44
1G	38+74.55	19.15	597.47	597.72
1H	38+84.55	19.15	597.73	597.98
1I	38+94.55	19.15	597.99	598.23
1J	39+04.55	19.15	598.25	598.47
1K	39+14.55	19.15	598.50	598.70
1L	39+24.55	19.15	598.75	598.91
1M	39+34.55	19.15	598.99	599.12
1N	39+44.55	19.15	599.21	599.31
1O	39+54.55	19.15	599.43	599.50
1P	39+64.55	19.15	599.62	599.67
1Q	39+74.55	19.15	599.81	599.84
C BRG. PIER 1 EB	39+86.30	19.15	600.02	600.04
1R	39+96.30	19.15	600.20	600.23
1S	40+06.30	19.15	600.38	600.42
1T	40+16.30	19.15	600.55	600.61
1U	40+26.30	19.15	600.72	600.80
1V	40+36.30	19.15	600.88	600.99
1W	40+46.30	19.15	601.04	601.18
1X	40+56.30	19.15	601.20	601.36
1Y	40+66.30	19.15	601.35	601.53
1Z	40+76.30	19.15	601.50	601.70
1AA	40+86.30	19.15	601.64	601.86
1AB	40+96.30	19.15	601.78	602.00
1AC	41+06.30	19.15	601.92	602.13
1AD	41+16.30	19.15	602.05	602.25
1AE	41+26.30	19.15	602.18	602.35
1AF	41+36.30	19.15	602.30	602.44
1AG	41+46.30	19.15	602.42	602.53
1AH	41+56.30	19.15	602.54	602.60
1AI	-	-	-	-
1AJ	-	-	-	-
C W. BRG. PIER 2 EB	41+66.20	19.15	602.65	602.67
C PIER 2 EB	41+68.45	19.15	602.67	602.69

CROWN - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+98.35	24.00	595.25	595.28
└─ EXP. JT.	38+00.66	24.00	595.33	595.35
└─ BRG. W. ABUT. EB	38+02.43	24.00	595.38	595.40
1A	38+12.43	24.00	595.68	595.75
1B	38+22.43	24.00	595.98	596.10
1C	38+32.43	24.00	596.28	596.44
1D	38+42.43	24.00	596.57	596.77
1E	38+52.43	24.00	596.86	597.08
1F	38+62.43	24.00	597.15	597.38
1G	38+72.43	24.00	597.43	597.67
1H	38+82.43	24.00	597.70	597.94
1I	38+92.43	24.00	597.97	598.20
1J	39+02.43	24.00	598.24	598.45
1K	39+12.43	24.00	598.51	598.69
1L	39+22.43	24.00	598.77	598.92
1M	39+32.43	24.00	599.01	599.13
1N	39+42.43	24.00	599.24	599.33
1O	39+52.43	24.00	599.46	599.52
1P	39+62.43	24.00	599.65	599.69
1Q	39+72.43	24.00	599.84	599.87
└─ BRG. PIER 1 EB	39+84.18	24.00	600.06	600.08
1R	39+94.18	24.00	600.24	600.27
1S	40+04.18	24.00	600.42	600.46
1T	40+14.18	24.00	600.59	600.65
1U	40+24.18	24.00	600.76	600.85
1V	40+34.18	24.00	600.92	601.04
1W	40+44.18	24.00	601.08	601.23
1X	40+54.18	24.00	601.24	601.42
1Y	40+64.18	24.00	601.39	601.60
1Z	40+74.18	24.00	601.54	601.77
1AA	40+84.18	24.00	601.68	601.93
1AB	40+94.18	24.00	601.82	602.08
1AC	41+04.18	24.00	601.96	602.20
1AD	41+14.18	24.00	602.09	602.33
1AE	41+24.18	24.00	602.22	602.43
1AF	41+34.18	24.00	602.35	602.52
1AG	41+44.18	24.00	602.47	602.60
1AH	41+54.18	24.00	602.58	602.67
1AI	-	-	-	-
1AJ	-	-	-	-
└─ W. BRG. PIER 2 EB	41+66.20	24.00	602.72	602.74
└─ PIER 2 EB	41+68.45	24.00	602.74	602.76

GIRDER E5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+96.23	28.85	595.12	595.14
C EXP. JT.	37+98.55	28.85	595.19	595.21
C BRG. W. ABUT. EB	38+00.32	28.85	595.24	595.26
1A	38+10.32	28.85	595.55	595.62
1B	38+20.32	28.85	595.85	595.97
1C	38+30.32	28.85	596.15	596.30
1D	38+40.32	28.85	596.44	596.63
1E	38+50.32	28.85	596.73	596.95
1F	38+60.32	28.85	597.01	597.25
1G	38+70.32	28.85	597.29	597.54
1H	38+80.32	28.85	597.57	597.81
1I	38+90.32	28.85	597.84	598.07
1J	39+00.32	28.85	598.11	598.32
1K	39+10.32	28.85	598.38	598.56
1L	39+20.32	28.85	598.64	598.79
1M	39+30.32	28.85	598.89	599.01
1N	39+40.32	28.85	599.12	599.21
1O	39+50.32	28.85	599.34	599.40
1P	39+60.32	28.85	599.54	599.58
1Q	39+70.32	28.85	599.73	599.76
C BRG. PIER 1 EB	39+82.07	28.85	599.95	599.97
1R	39+92.07	28.85	600.13	600.16
1S	40+02.07	28.85	600.31	600.35
1T	40+12.07	28.85	600.48	600.54
1U	40+22.07	28.85	600.65	600.74
1V	40+32.07	28.85	600.81	600.93
1W	40+42.07	28.85	600.98	601.13
1X	40+52.07	28.85	601.13	601.32
1Y	40+62.07	28.85	601.29	601.49
1Z	40+72.07	28.85	601.44	601.67
1AA	40+82.07	28.85	601.58	601.82
1AB	40+92.07	28.85	601.72	601.97
1AC	41+02.07	28.85	601.86	602.10
1AD	41+12.07	28.85	601.99	602.23
1AE	41+22.07	28.85	602.12	602.33
1AF	41+32.07	28.85	602.25	602.42
1AG	41+42.07	28.85	602.37	602.50
1AH	41+52.07	28.85	602.49	602.58
1AI	-	-	-	-
1AJ	-	-	-	-
C W. BRG. PIER 2 EB	41+66.20	28.85	602.65	602.67
C PIER 2 EB	41+68.45	28.85	602.67	602.69

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

NORTH EDGE OF SOUTH LANE - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+93.13	36.00	594.91	594.93
└─ EXP. JT.	37+95.44	36.00	594.99	595.01
└─ BRG. W. ABUT. EB	37+97.22	36.00	595.04	595.06
1A	38+07.22	36.00	595.35	595.42
1B	38+17.22	36.00	595.65	595.77
1C	38+27.22	36.00	595.95	596.11
1D	38+37.22	36.00	596.24	596.44
1E	38+47.22	36.00	596.53	596.75
1F	38+57.22	36.00	596.82	597.05
1G	38+67.22	36.00	597.10	597.34
1H	38+77.22	36.00	597.38	597.62
1I	38+87.22	36.00	597.65	597.88
1J	38+97.22	36.00	597.92	598.13
1K	39+07.22	36.00	598.19	598.37
1L	39+17.22	36.00	598.45	598.60
1M	39+27.22	36.00	598.71	598.82
1N	39+37.22	36.00	598.94	599.03
1O	39+47.22	36.00	599.17	599.22
1P	39+57.22	36.00	599.37	599.41
1Q	39+67.22	36.00	599.56	599.59
└─ BRG. PIER 1 EB	39+78.97	36.00	599.78	599.80
1R	39+88.97	36.00	599.97	600.00
1S	39+98.97	36.00	600.14	600.19
1T	40+08.97	36.00	600.32	600.39
1U	40+18.97	36.00	600.49	600.59
1V	40+28.97	36.00	600.66	600.79
1W	40+38.97	36.00	600.82	600.99
1X	40+48.97	36.00	600.98	601.18
1Y	40+58.97	36.00	601.13	601.37
1Z	40+68.97	36.00	601.28	601.54
1AA	40+78.97	36.00	601.43	601.70
1AB	40+88.97	36.00	601.57	601.86
1AC	40+98.97	36.00	601.71	601.99
1AD	41+08.97	36.00	601.85	602.11
1AE	41+18.97	36.00	601.98	602.22
1AF	41+28.97	36.00	602.10	602.31
1AG	41+38.97	36.00	602.23	602.39
1AH	41+48.97	36.00	602.34	602.47
1AI	41+58.97	36.00	602.46	602.53
1AJ	-	-	-	-
└─ W. BRG. PIER 2 EB	41+66.20	36.00	602.54	602.56
└─ PIER 2 EB	41+68.45	36.00	602.56	602.58

GIRDER E6

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+92.01	38.56	594.83	594.85
C EXP. JT.	37+94.33	38.56	594.90	594.92
C BRG. W. ABUT. EB	37+96.10	38.56	594.95	594.98
1A	38+06.10	38.56	595.26	595.33
1B	38+16.10	38.56	595.56	595.68
1C	38+26.10	38.56	595.86	596.02
1D	38+36.10	38.56	596.16	596.35
1E	38+46.10	38.56	596.45	596.67
1F	38+56.10	38.56	596.74	596.97
1G	38+66.10	38.56	597.02	597.26
1H	38+76.10	38.56	597.30	597.53
1I	38+86.10	38.56	597.57	597.80
1J	38+96.10	38.56	597.84	598.04
1K	39+06.10	38.56	598.11	598.29
1L	39+16.10	38.56	598.37	598.52
1M	39+26.10	38.56	598.63	598.74
1N	39+36.10	38.56	598.86	598.95
1O	39+46.10	38.56	599.09	599.15
1P	39+56.10	38.56	599.30	599.34
1Q	39+66.10	38.56	599.49	599.52
C BRG. PIER 1 EB	39+77.85	38.56	599.71	599.73
1R	39+87.85	38.56	599.89	599.93
1S	39+97.85	38.56	600.07	600.12
1T	40+07.85	38.56	600.25	600.32
1U	40+17.85	38.56	600.42	600.52
1V	40+27.85	38.56	600.59	600.72
1W	40+37.85	38.56	600.75	600.92
1X	40+47.85	38.56	600.91	601.11
1Y	40+57.85	38.56	601.06	601.30
1Z	40+67.85	38.56	601.21	601.47
1AA	40+77.85	38.56	601.36	601.64
1AB	40+87.85	38.56	601.50	601.79
1AC	40+97.85	38.56	601.64	601.92
1AD	41+07.85	38.56	601.78	602.05
1AE	41+17.85	38.56	601.91	602.15
1AF	41+27.85	38.56	602.04	602.25
1AG	41+37.85	38.56	602.16	602.33
1AH	41+47.85	38.56	602.28	602.40
1AI	41+57.85	38.56	602.39	602.46
1AJ	-	-	-	-
C W. BRG. PIER 2 EB	41+66.20	38.56	602.49	602.51
C PIER 2 EB	41+68.45	38.56	602.51	602.53

GIRDER E7

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+87.79	48.27	594.50	594.52
C EXP. JT.	37+90.11	48.27	594.58	594.60
C BRG. W. ABUT. EB	37+91.88	48.27	594.63	594.65
1A	38+01.88	48.27	594.94	595.01
1B	38+11.88	48.27	595.24	595.36
1C	38+21.88	48.27	595.54	595.70
1D	38+31.88	48.27	595.84	596.03
1E	38+41.88	48.27	596.13	596.35
1F	38+51.88	48.27	596.42	596.65
1G	38+61.88	48.27	596.70	596.94
1H	38+71.88	48.27	596.99	597.22
1I	38+81.88	48.27	597.26	597.48
1J	38+91.88	48.27	597.53	597.73
1K	39+01.88	48.27	597.80	597.97
1L	39+11.88	48.27	598.07	598.21
1M	39+21.88	48.27	598.33	598.44
1N	39+31.88	48.27	598.57	598.65
1O	39+41.88	48.27	598.80	598.86
1P	39+51.88	48.27	599.02	599.06
1Q	39+61.88	48.27	599.22	599.24
C BRG. PIER 1 EB	39+73.63	48.27	599.44	599.46
1R	39+83.63	48.27	599.62	599.66
1S	39+93.63	48.27	599.80	599.86
1T	40+03.63	48.27	599.98	600.06
1U	40+13.63	48.27	600.15	600.27
1V	40+23.63	48.27	600.32	600.47
1W	40+33.63	48.27	600.49	600.68
1X	40+43.63	48.27	600.65	600.88
1Y	40+53.63	48.27	600.80	601.07
1Z	40+63.63	48.27	600.96	601.25
1AA	40+73.63	48.27	601.11	601.41
1AB	40+83.63	48.27	601.25	601.57
1AC	40+93.63	48.27	601.39	601.71
1AD	41+03.63	48.27	601.53	601.83
1AE	41+13.63	48.27	601.66	601.94
1AF	41+23.63	48.27	601.79	602.04
1AG	41+33.63	48.27	601.91	602.12
1AH	41+43.63	48.27	602.04	602.19
1AI	41+53.63	48.27	602.15	602.25
1AJ	-	-	-	-
C W. BRG. PIER 2 EB	41+66.20	48.27	602.29	602.31
C PIER 2 EB	41+68.45	48.27	602.32	602.34

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\proj\transys\sys-pw\hntb\com\transys\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-8325-5213-DEE106.dgn

PROP. BL CENTER RAMP B

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+86.78	50.60	594.43	594.45
⌒ EXP. JT.	37+89.12	50.55	594.50	594.52
⌒ BRG. W. ABUT. EB	37+90.91	50.52	594.56	594.58
1A	38+00.90	50.32	594.87	594.94
1B	38+10.90	50.12	595.18	595.29
1C	38+20.90	49.92	595.48	595.64
1D	38+30.90	49.72	595.78	595.97
1E	38+40.90	49.52	596.08	596.30
1F	38+50.89	49.32	596.37	596.60
1G	38+60.89	49.12	596.66	596.90
1H	38+70.89	48.92	596.94	597.18
1I	38+80.89	48.72	597.23	597.45
1J	38+90.89	48.52	597.50	597.70
1K	39+00.88	48.32	597.78	597.95
1L	39+10.88	48.12	598.04	598.18
1M	-	-	-	-
1N	-	-	-	-
1O	-	-	-	-
1P	-	-	-	-
1Q	-	-	-	-
⌒ BRG. PIER 1 EB	-	-	-	-
1R	-	-	-	-
1S	-	-	-	-
1T	-	-	-	-
1U	-	-	-	-
1V	-	-	-	-
1W	-	-	-	-
1X	-	-	-	-
1Y	-	-	-	-
1Z	-	-	-	-
1AA	-	-	-	-
1AB	-	-	-	-
1AC	-	-	-	-
1AD	-	-	-	-
1AE	-	-	-	-
1AF	-	-	-	-
1AG	-	-	-	-
1AH	-	-	-	-
1AI	-	-	-	-
1AJ	-	-	-	-
⌒ W. BRG. PIER 2 EB	-	-	-	-
⌒ PIER 2 EB	-	-	-	-

GIRDER E8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+83.57	57.98	594.18	594.20
⌒ EXP. JT.	37+85.89	57.98	594.25	594.27
⌒ BRG. W. ABUT. EB	37+87.66	57.98	594.31	594.33
1A	37+97.66	57.98	594.61	594.68
1B	38+07.66	57.98	594.92	595.03
1C	38+17.66	57.98	595.22	595.37
1D	38+27.66	57.98	595.52	595.70
1E	38+37.66	57.98	595.81	596.02
1F	38+47.66	57.98	596.10	596.32
1G	38+57.66	57.98	596.39	596.61
1H	38+67.66	57.98	596.67	596.89
1I	38+77.66	57.98	596.95	597.16
1J	38+87.66	57.98	597.23	597.41
1K	38+97.66	57.98	597.50	597.65
1L	39+07.66	57.98	597.76	597.89
1M	39+17.66	57.98	598.02	598.12
1N	39+27.66	57.98	598.28	598.35
1O	39+37.66	57.98	598.51	598.56
1P	39+47.66	57.98	598.74	598.77
1Q	39+57.66	57.98	598.94	598.96
⌒ BRG. PIER 1 EB	39+69.41	57.98	599.16	599.19
1R	39+79.41	57.98	599.35	599.39
1S	39+89.41	57.98	599.53	599.59
1T	39+99.41	57.98	599.71	599.80
1U	40+09.41	57.98	599.89	600.01
1V	40+19.41	57.98	600.06	600.22
1W	40+29.41	57.98	600.22	600.43
1X	40+39.41	57.98	600.39	600.63
1Y	40+49.41	57.98	600.54	600.83
1Z	40+59.41	57.98	600.70	601.01
1AA	40+69.41	57.98	600.85	601.19
1AB	40+79.41	57.98	601.00	601.35
1AC	40+89.41	57.98	601.14	601.49
1AD	40+99.41	57.98	601.28	601.62
1AE	41+09.41	57.98	601.41	601.73
1AF	41+19.41	57.98	601.54	601.83
1AG	41+29.41	57.98	601.67	601.91
1AH	41+39.41	57.98	601.79	601.98
1AI	41+49.41	57.98	601.91	602.04
1AJ	41+59.41	57.98	602.02	602.09
⌒ W. BRG. PIER 2 EB	41+66.20	57.98	602.10	602.12
⌒ PIER 2 EB	41+68.45	57.98	602.12	602.14

INSIDE FACE OF SOUTH PARAPET - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
BK. W. ABUT. EB	37+82.69	60.00	594.11	594.13
⌒ EXP. JT.	37+85.01	60.00	594.18	594.20
⌒ BRG. W. ABUT. EB	37+86.78	60.00	594.24	594.26
1A	37+96.78	60.00	594.55	594.61
1B	38+06.78	60.00	594.85	594.96
1C	38+16.78	60.00	595.16	595.30
1D	38+26.78	60.00	595.45	595.63
1E	38+36.78	60.00	595.75	595.95
1F	38+46.78	60.00	596.04	596.26
1G	38+56.78	60.00	596.33	596.55
1H	38+66.78	60.00	596.61	596.82
1I	38+76.78	60.00	596.89	597.09
1J	38+86.78	60.00	597.16	597.34
1K	38+96.78	60.00	597.43	597.59
1L	39+06.78	60.00	597.70	597.83
1M	39+16.78	60.00	597.96	598.06
1N	39+26.78	60.00	598.22	598.29
1O	39+36.78	60.00	598.45	598.50
1P	39+46.78	60.00	598.68	598.71
1Q	39+56.78	60.00	598.88	598.91
⌒ BRG. PIER 1 EB	39+68.53	60.00	599.11	599.13
1R	39+78.53	60.00	599.29	599.33
1S	39+88.53	60.00	599.48	599.53
1T	39+98.53	60.00	599.66	599.75
1U	40+08.53	60.00	599.83	599.95
1V	40+18.53	60.00	600.00	600.17
1W	40+28.53	60.00	600.17	600.38
1X	40+38.53	60.00	600.33	600.58
1Y	40+48.53	60.00	600.49	600.78
1Z	40+58.53	60.00	600.65	600.96
1AA	40+68.53	60.00	600.80	601.14
1AB	40+78.53	60.00	600.94	601.29
1AC	40+88.53	60.00	601.09	601.44
1AD	40+98.53	60.00	601.22	601.57
1AE	41+08.53	60.00	601.36	601.68
1AF	41+18.53	60.00	601.49	601.78
1AG	41+28.53	60.00	601.62	601.86
1AH	41+38.53	60.00	601.74	601.93
1AI	41+48.53	60.00	601.86	601.99
1AJ	41+58.53	60.00	601.97	602.04
⌒ W. BRG. PIER 2 EB	41+66.20	60.00	602.06	602.08
⌒ PIER 2 EB	41+68.45	60.00	602.08	602.10

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 8:0' = 1" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 5 - UNIT 1 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB


SHEET 5-41 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	622
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projects\trans\scorp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structure\0998309-42R23-5215-DEW202.dgn

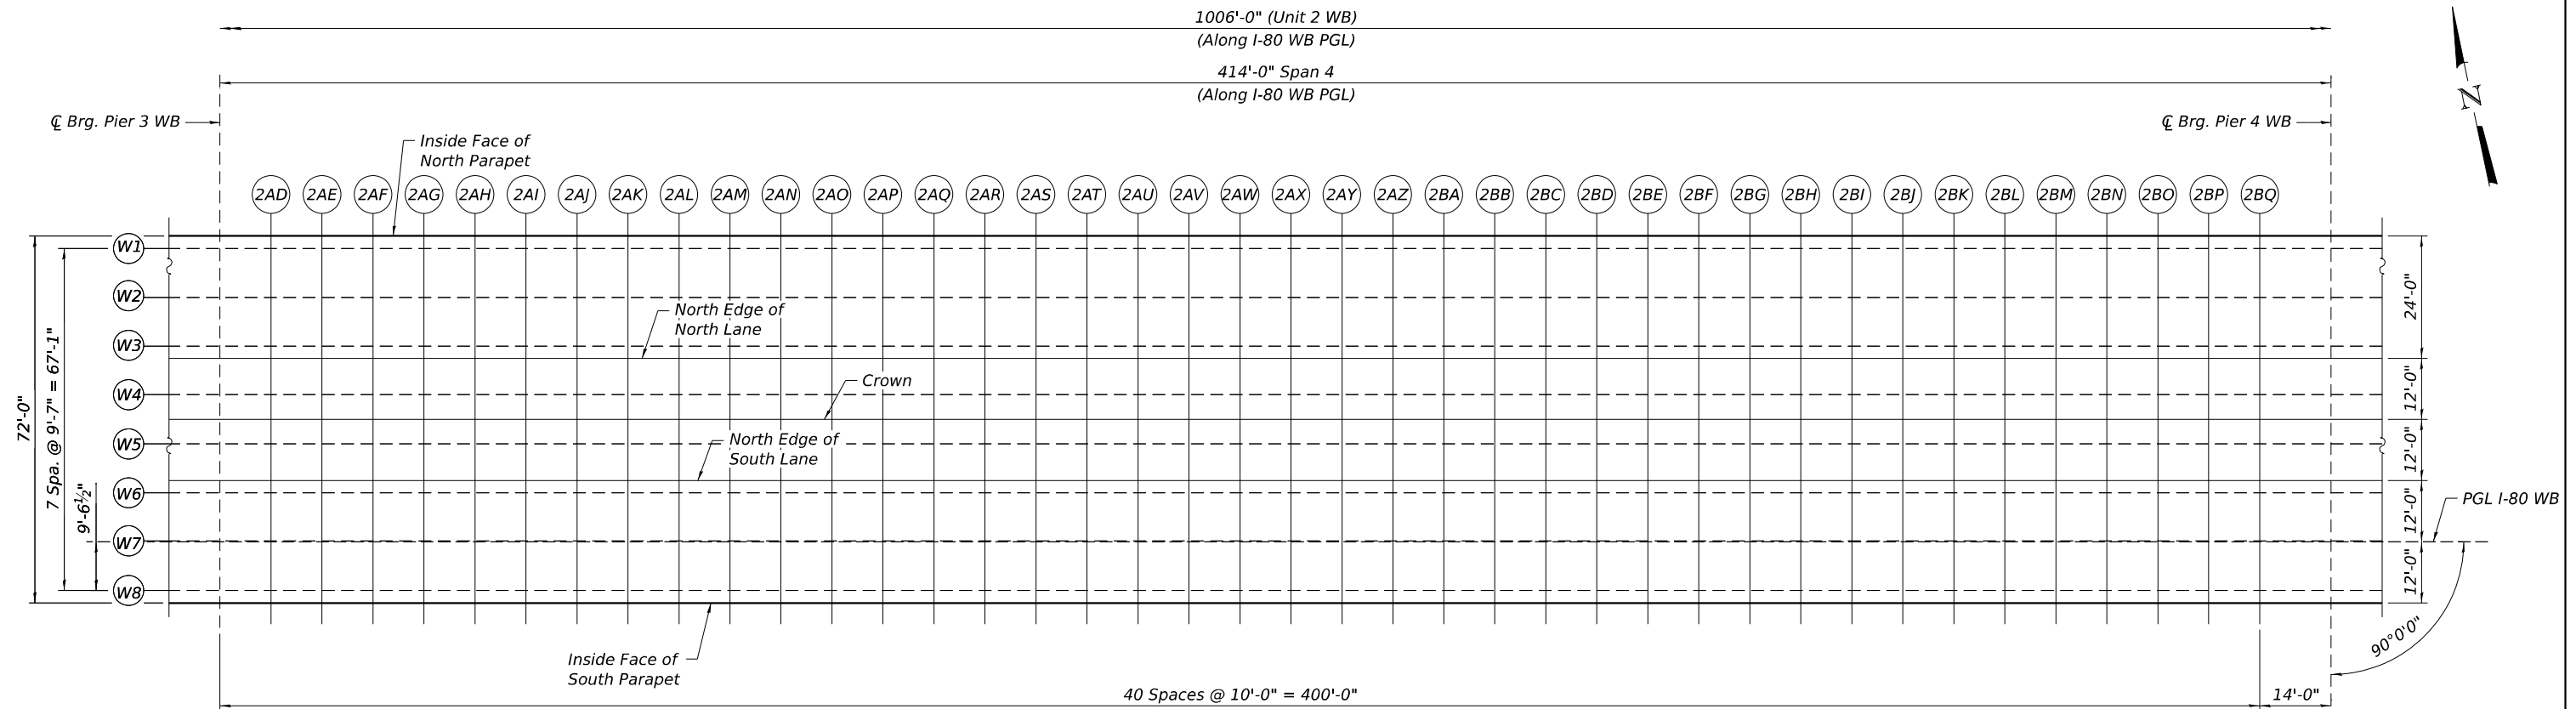

PARTIAL PLAN - UNIT 2 WB

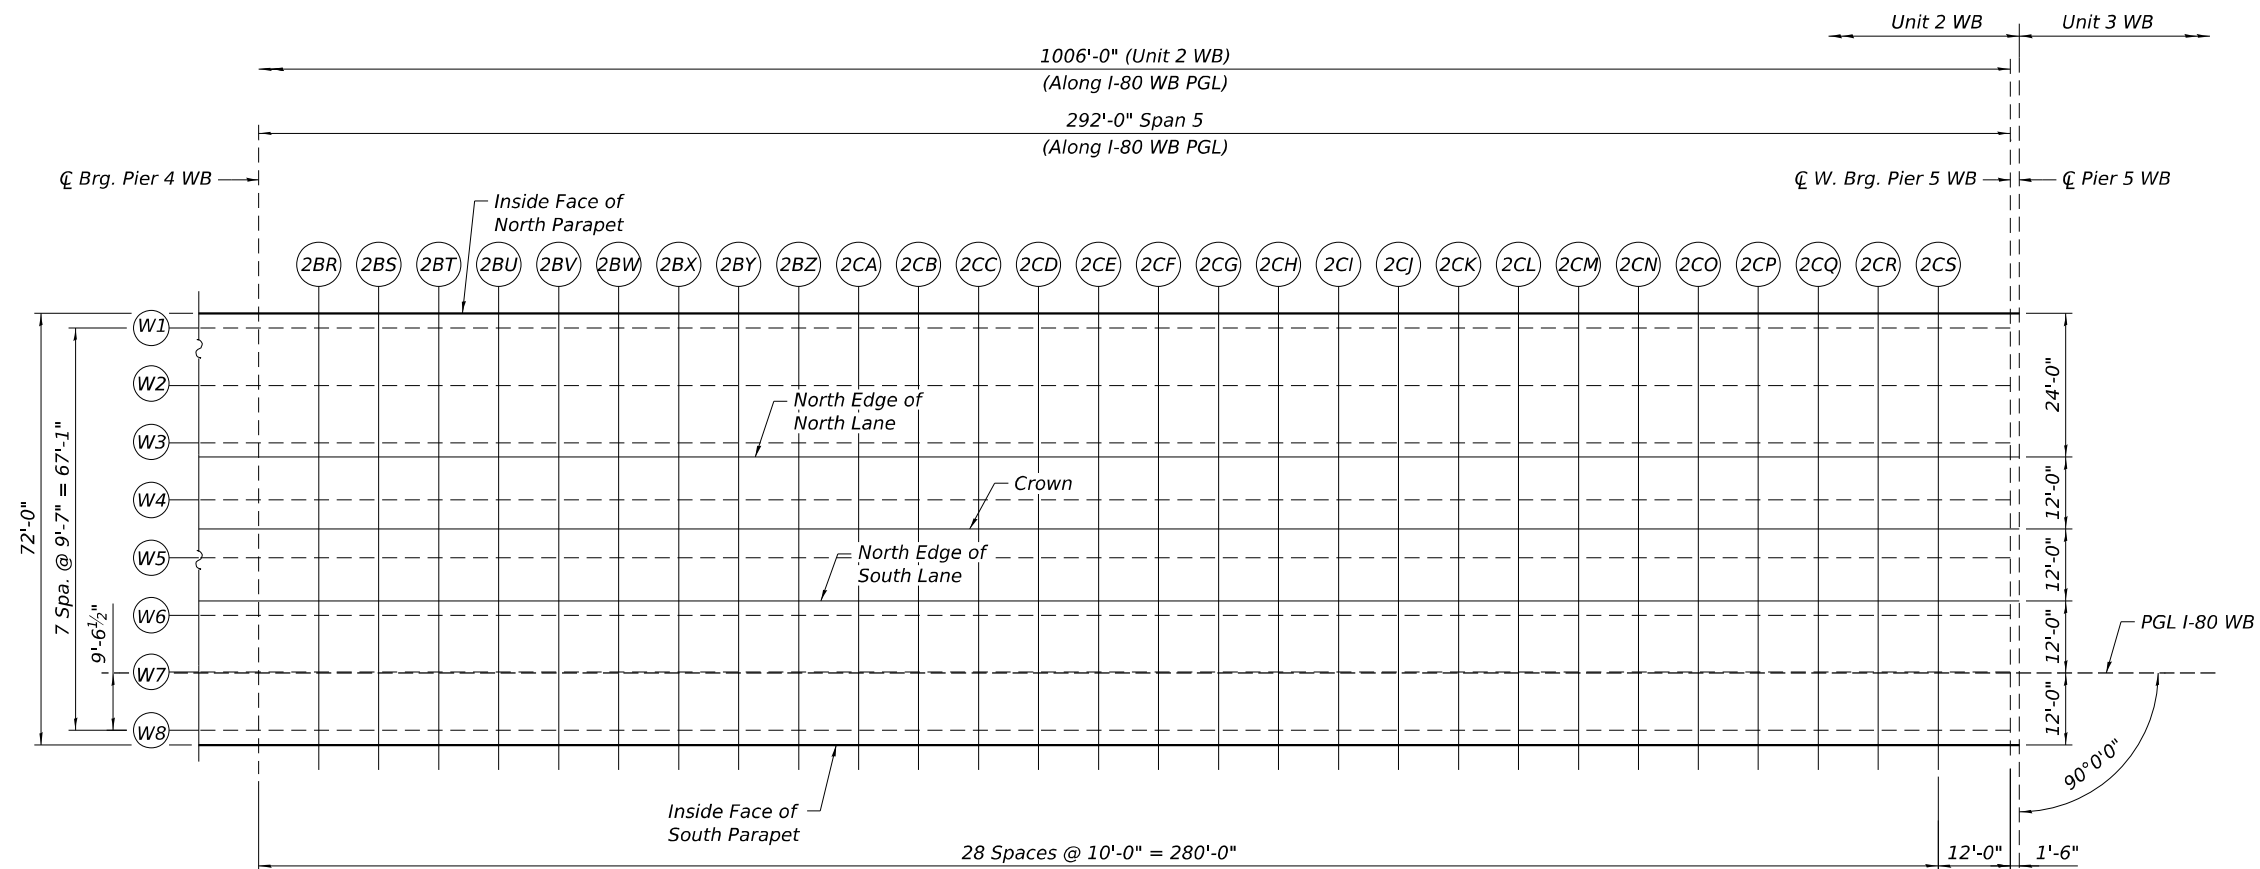

PARTIAL PLAN - UNIT 2 WB



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614
DESIGNED - LAS
CHECKED - PJJ
PLOT SCALE = 32:0 " = 1" / in.
DRAWN - GM
PLOT DATE = 11/5/2025
CHECKED - LAS
REVISED -

DESIGNED - LAS
CHECKED - PJJ
DRAWN - GM
PLOT DATE = 11/5/2025
CHECKED - LAS
REVISED -

DESIGNED - LAS
CHECKED - PJJ
DRAWN - GM
PLOT DATE = 11/5/2025
CHECKED - LAS
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION PLAN 2 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-43 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	624
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\wsp\transystems-pw\hntb\comtransystems-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structural\0998309-42R23-5216-DEW\03.dgn

INSIDE FACE OF NORTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	-61.44	602.39	602.41
☐ E BRG PIER 2 WB	42+02.38	-61.38	602.40	602.42
2A	42+12.38	-60.85	602.51	602.59
2B	42+22.38	-60.31	602.61	602.76
2C	42+32.38	-60.00	602.70	602.91
2D	42+42.38	-60.00	602.78	603.05
2E	42+52.38	-60.00	602.86	603.18
2F	42+62.38	-60.00	602.93	603.30
2G	42+72.38	-60.00	603.00	603.40
2H	42+82.38	-60.00	603.06	603.50
2I	42+92.38	-60.00	603.13	603.59
2J	43+02.38	-60.00	603.18	603.66
2K	43+12.38	-60.00	603.24	603.73
2L	43+22.38	-60.00	603.29	603.78
2M	43+32.38	-60.00	603.33	603.82
2N	43+42.38	-60.00	603.37	603.85
2O	43+52.38	-60.00	603.41	603.87
2P	43+62.38	-60.00	603.44	603.88
2Q	43+72.38	-60.00	603.47	603.88
2R	43+82.38	-60.00	603.50	603.87
2S	43+92.38	-60.00	603.52	603.85
2T	44+02.38	-60.00	603.54	603.82
2U	44+12.38	-60.00	603.55	603.79
2V	44+22.38	-60.00	603.56	603.75
2W	44+32.38	-60.00	603.56	603.71
2X	44+42.38	-60.00	603.57	603.68
2Y	44+52.38	-60.00	603.56	603.64
2Z	44+62.38	-60.00	603.56	603.61
2AA	44+72.38	-60.00	603.55	603.58
2AB	44+82.38	-60.00	603.53	603.55
2AC	44+92.38	-60.00	603.51	603.53
☐ BRG. PIER 3 WB	45+02.38	-60.00	603.49	603.51
2AD	45+12.38	-60.00	603.46	603.50
2AE	45+22.38	-60.00	603.43	603.49
2AF	45+32.38	-60.00	603.40	603.49
2AG	45+42.38	-60.00	603.36	603.49
2AH	45+52.38	-60.00	603.32	603.49
2AI	45+62.38	-60.00	603.27	603.49
2AJ	45+72.38	-60.00	603.22	603.50
2AK	45+82.38	-60.00	603.16	603.50
2AL	45+92.38	-60.00	603.11	603.50
2AM	46+02.38	-60.00	603.04	603.50
2AN	46+12.38	-60.00	602.98	603.49
2AO	46+22.38	-60.00	602.91	603.48
2AP	46+32.38	-60.00	602.83	603.45
2AQ	46+42.38	-60.00	602.75	603.42
2AR	46+52.38	-60.00	602.67	603.38
2AS	46+62.38	-60.00	602.58	603.32
2AT	46+72.38	-60.00	602.49	603.26
2AU	46+82.38	-60.00	602.40	603.19
2AV	46+92.38	-60.00	602.30	603.11
2AW	47+02.38	-60.00	602.20	603.01
2AX	47+12.38	-60.00	602.09	602.91
2AY	47+22.38	-60.00	601.98	602.79
2AZ	47+32.38	-60.00	601.86	602.67

INSIDE FACE OF NORTH PARAPET - WB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-60.00	601.75	602.53
2BB	47+52.38	-60.00	601.62	602.38
2BC	47+62.38	-60.00	601.50	602.23
2BD	47+72.38	-60.00	601.37	602.06
2BE	47+82.38	-60.00	601.23	601.88
2BF	47+92.38	-60.00	601.09	601.69
2BG	48+02.38	-60.00	600.95	601.50
2BH	48+12.38	-60.00	600.80	601.29
2BI	48+22.38	-60.00	600.65	601.08
2BJ	48+32.38	-60.00	600.50	600.87
2BK	48+42.38	-60.00	600.34	600.65
2BL	48+52.38	-60.00	600.18	600.43
2BM	48+62.38	-60.00	600.01	600.21
2BN	48+72.38	-60.00	599.84	599.99
2BO	48+82.38	-60.00	599.66	599.77
2BP	48+92.38	-60.00	599.49	599.56
2BQ	49+02.38	-60.00	599.30	599.35
☐ BRG. PIER 4 WB	49+16.38	-60.00	599.04	599.06
2BR	49+26.38	-60.00	598.85	598.86
2BS	49+36.38	-60.00	598.65	598.67
2BT	49+46.38	-60.00	598.45	598.48
2BU	49+56.38	-60.00	598.25	598.29
2BV	49+66.38	-60.00	598.04	598.10
2BW	49+76.38	-60.00	597.83	597.92
2BX	49+86.38	-60.00	597.61	597.74
2BY	49+96.38	-60.00	597.39	597.56
2BZ	50+06.38	-60.00	597.17	597.37
2CA	50+16.38	-60.00	596.94	597.19
2CB	50+26.38	-60.00	596.71	596.99
2CC	50+36.38	-60.00	596.47	596.79
2CD	50+46.38	-60.00	596.23	596.59
2CE	50+56.38	-60.00	595.98	596.37
2CF	50+66.38	-60.00	595.74	596.14
2CG	50+76.38	-60.00	595.48	595.91
2CH	50+86.38	-60.00	595.23	595.66
2CI	50+96.38	-60.00	594.97	595.40
2CJ	51+06.38	-60.00	594.70	595.13
2CK	51+16.38	-60.00	594.43	594.85
2CL	51+26.38	-60.00	594.16	594.56
2CM	51+36.38	-60.00	593.89	594.25
2CN	51+46.38	-60.00	593.61	593.94
2CO	51+56.38	-60.00	593.32	593.62
2CP	51+66.38	-60.00	593.03	593.28
2CQ	51+76.38	-60.00	592.74	592.94
2CR	51+86.38	-60.00	592.45	592.59
2CS	51+96.38	-60.00	592.14	592.24
☐ W BRG PIER 5 WB	52+08.38	-60.00	591.78	591.80
☐ PIER 5 WB	52+09.88	-60.00	591.73	591.75

GIRDER W1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	-57.54	602.47	602.49
☐ E BRG PIER 2 WB	42+02.38	-57.54	602.48	602.50
2A	42+12.38	-57.54	602.57	602.66
2B	42+22.38	-57.54	602.66	602.81
2C	42+32.38	-57.54	602.75	602.96
2D	42+42.38	-57.54	602.83	603.10
2E	42+52.38	-57.54	602.91	603.22
2F	42+62.38	-57.54	602.98	603.34
2G	42+72.38	-57.54	603.05	603.45
2H	42+82.38	-57.54	603.11	603.55
2I	42+92.38	-57.54	603.18	603.64
2J	43+02.38	-57.54	603.23	603.71
2K	43+12.38	-57.54	603.29	603.78
2L	43+22.38	-57.54	603.34	603.83
2M	43+32.38	-57.54	603.38	603.87
2N	43+42.38	-57.54	603.42	603.90
2O	43+52.38	-57.54	603.46	603.92
2P	43+62.38	-57.54	603.49	603.93
2Q	43+72.38	-57.54	603.52	603.93
2R	43+82.38	-57.54	603.55	603.92
2S	43+92.38	-57.54	603.57	603.90
2T	44+02.38	-57.54	603.59	603.87
2U	44+12.38	-57.54	603.60	603.84
2V	44+22.38	-57.54	603.61	603.80
2W	44+32.38	-57.54	603.61	603.76
2X	44+42.38	-57.54	603.61	603.73
2Y	44+52.38	-57.54	603.61	603.69
2Z	44+62.38	-57.54	603.61	603.66
2AA	44+72.38	-57.54	603.59	603.63
2AB	44+82.38	-57.54	603.58	603.60
2AC	44+92.38	-57.54	603.56	603.58
☐ BRG. PIER 3 WB	45+02.38	-57.54	603.54	603.56
2AD	45+12.38	-57.54	603.51	603.55
2AE	45+22.38	-57.54	603.48	603.54
2AF	45+32.38	-57.54	603.45	603.54
2AG	45+42.38	-57.54	603.41	603.53
2AH	45+52.38	-57.54	603.37	603.54
2AI	45+62.38	-57.54	603.32	603.54
2AJ	45+72.38	-57.54	603.27	603.55
2AK	45+82.38	-57.54	603.21	603.55
2AL	45+92.38	-57.54	603.15	603.55
2AM	46+02.38	-57.54	603.09	603.55
2AN	46+12.38	-57.54	603.03	603.54
2AO	46+22.38	-57.54	602.95	603.53
2AP	46+32.38	-57.54	602.88	603.50
2AQ	46+42.38	-57.54	602.80	603.47
2AR	46+52.38	-57.54	602.72	603.43
2AS	46+62.38	-57.54	602.63	603.37
2AT	46+72.38	-57.54	602.54	603.31
2AU	46+82.38	-57.54	602.45	603.24
2AV	46+92.38	-57.54	602.35	603.16
2AW	47+02.38	-57.54	602.25	603.06
2AX	47+12.38	-57.54	602.14	602.96
2AY	47+22.38	-57.54	602.03	602.84
2AZ	47+32.38	-57.54	601.91	602.72

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 100,000 ' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 1 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-44 OF S-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	625
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projects\trans\systems-pw\hntb\comtrans\corp-pw\hntb\comtrans\documents\projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structure\099-8309-42R23-5217-256\V204.dgn

GIRDER W1 (CONT.)				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-57.54	601.79	602.58
2BB	47+52.38	-57.54	601.67	602.43
2BC	47+62.38	-57.54	601.55	602.27
2BD	47+72.38	-57.54	601.41	602.11
2BE	47+82.38	-57.54	601.28	601.93
2BF	47+92.38	-57.54	601.14	601.74
2BG	48+02.38	-57.54	601.00	601.55
2BH	48+12.38	-57.54	600.85	601.34
2BI	48+22.38	-57.54	600.70	601.13
2BJ	48+32.38	-57.54	600.55	600.92
2BK	48+42.38	-57.54	600.39	600.70
2BL	48+52.38	-57.54	600.23	600.48
2BM	48+62.38	-57.54	600.06	600.26
2BN	48+72.38	-57.54	599.89	600.04
2BO	48+82.38	-57.54	599.71	599.82
2BP	48+92.38	-57.54	599.53	599.61
2BQ	49+02.38	-57.54	599.35	599.40
⌀ BRG. PIER 4 WB	49+16.38	-57.54	599.09	599.11
2BR	49+26.38	-57.54	598.90	598.91
2BS	49+36.38	-57.54	598.70	598.72
2BT	49+46.38	-57.54	598.50	598.52
2BU	49+56.38	-57.54	598.30	598.34
2BV	49+66.38	-57.54	598.09	598.15
2BW	49+76.38	-57.54	597.88	597.97
2BX	49+86.38	-57.54	597.66	597.79
2BY	49+96.38	-57.54	597.44	597.61
2BZ	50+06.38	-57.54	597.21	597.42
2CA	50+16.38	-57.54	596.99	597.24
2CB	50+26.38	-57.54	596.75	597.04
2CC	50+36.38	-57.54	596.52	596.84
2CD	50+46.38	-57.54	596.28	596.64
2CE	50+56.38	-57.54	596.03	596.42
2CF	50+66.38	-57.54	595.79	596.19
2CG	50+76.38	-57.54	595.53	595.95
2CH	50+86.38	-57.54	595.28	595.71
2CI	50+96.38	-57.54	595.02	595.45
2CJ	51+06.38	-57.54	594.75	595.18
2CK	51+16.38	-57.54	594.48	594.90
2CL	51+26.38	-57.54	594.21	594.61
2CM	51+36.38	-57.54	593.94	594.30
2CN	51+46.38	-57.54	593.66	593.99
2CO	51+56.38	-57.54	593.37	593.67
2CP	51+66.38	-57.54	593.08	593.33
2CQ	51+76.38	-57.54	592.79	592.99
2CR	51+86.38	-57.54	592.49	592.64
2CS	51+96.38	-57.54	592.19	592.29
⌀ W BRG PIER 5 WB	52+08.38	-57.54	591.83	591.85
⌀ PIER 5 WB	52+09.88	-57.54	591.78	591.80

PROP. ⌀ CENTER RAMP C				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
⌀ PIER 2 WB	42+01.21	-55.44	602.51	602.53
⌀ E BRG PIER 2 WB	42+02.38	-55.37	602.52	602.54
2A	42+12.37	-54.84	602.63	602.71
2B	42+22.35	-54.31	602.73	602.88
2C	42+32.34	-53.77	602.82	603.03
2D	42+42.32	-53.24	602.91	603.18
2E	42+52.31	-52.71	603.00	603.32
2F	42+62.29	-52.17	603.09	603.45
2G	42+72.28	-51.64	603.17	603.57
2H	42+82.27	-51.11	603.24	603.68
2I	42+92.25	-50.57	603.31	603.78
2J	43+02.24	-50.04	603.38	603.86
2K	43+12.22	-49.51	603.45	603.94
2L	-	-	-	-
2M	-	-	-	-
2N	-	-	-	-
2O	-	-	-	-
2P	-	-	-	-
2Q	-	-	-	-
2R	-	-	-	-
2S	-	-	-	-
2T	-	-	-	-
2U	-	-	-	-
2V	-	-	-	-
2W	-	-	-	-
2X	-	-	-	-
2Y	-	-	-	-
2Z	-	-	-	-
2AA	-	-	-	-
2AB	-	-	-	-
2AC	-	-	-	-
⌀ BRG. PIER 3 WB	-	-	-	-
2AD	-	-	-	-
2AE	-	-	-	-
2AF	-	-	-	-
2AG	-	-	-	-
2AH	-	-	-	-
2AI	-	-	-	-
2AJ	-	-	-	-
2AK	-	-	-	-
2AL	-	-	-	-
2AM	-	-	-	-
2AN	-	-	-	-
2AO	-	-	-	-
2AP	-	-	-	-
2AQ	-	-	-	-
2AR	-	-	-	-
2AS	-	-	-	-
2AT	-	-	-	-
2AU	-	-	-	-
2AV	-	-	-	-
2AW	-	-	-	-
2AX	-	-	-	-
2AY	-	-	-	-
2AZ	-	-	-	-

PROP. ⌀ CENTER RAMP C (CONT.)				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	-	-	-	-
2BB	-	-	-	-
2BC	-	-	-	-
2BD	-	-	-	-
2BE	-	-	-	-
2BF	-	-	-	-
2BG	-	-	-	-
2BH	-	-	-	-
2BI	-	-	-	-
2BJ	-	-	-	-
2BK	-	-	-	-
2BL	-	-	-	-
2BM	-	-	-	-
2BN	-	-	-	-
2BO	-	-	-	-
2BP	-	-	-	-
2BQ	-	-	-	-
⌀ BRG. PIER 4 WB	-	-	-	-
2BR	-	-	-	-
2BS	-	-	-	-
2BT	-	-	-	-
2BU	-	-	-	-
2BV	-	-	-	-
2BW	-	-	-	-
2BX	-	-	-	-
2BY	-	-	-	-
2BZ	-	-	-	-
2CA	-	-	-	-
2CB	-	-	-	-
2CC	-	-	-	-
2CD	-	-	-	-
2CE	-	-	-	-
2CF	-	-	-	-
2CG	-	-	-	-
2CH	-	-	-	-
2CI	-	-	-	-
2CJ	-	-	-	-
2CK	-	-	-	-
2CL	-	-	-	-
2CM	-	-	-	-
2CN	-	-	-	-
2CO	-	-	-	-
2CP	-	-	-	-
2CQ	-	-	-	-
2CR	-	-	-	-
2CS	-	-	-	-
⌀ W BRG PIER 5 WB	-	-	-	-
⌀ PIER 5 WB	-	-	-	-

- NOTES:
1. All Elevations and Offsets are in feet.
 2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

Model: Default
File Name: p:\proj\transys\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structural\0998309-42R23-5219-DEW\06.dgn

GIRDER W3 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-38.38	602.18	602.96
2BB	47+52.38	-38.38	602.06	602.81
2BC	47+62.38	-38.38	601.93	602.66
2BD	47+72.38	-38.38	601.80	602.49
2BE	47+82.38	-38.38	601.66	602.31
2BF	47+92.38	-38.38	601.52	602.13
2BG	48+02.38	-38.38	601.38	601.93
2BH	48+12.38	-38.38	601.24	601.73
2BI	48+22.38	-38.38	601.08	601.52
2BJ	48+32.38	-38.38	600.93	601.30
2BK	48+42.38	-38.38	600.77	601.08
2BL	48+52.38	-38.38	600.61	600.86
2BM	48+62.38	-38.38	600.44	600.64
2BN	48+72.38	-38.38	600.27	600.42
2BO	48+82.38	-38.38	600.10	600.21
2BP	48+92.38	-38.38	599.92	599.99
2BQ	49+02.38	-38.38	599.74	599.78
⌒ BRG. PIER 4 WB	49+16.38	-38.38	599.47	599.49
2BR	49+26.38	-38.38	599.28	599.30
2BS	49+36.38	-38.38	599.08	599.10
2BT	49+46.38	-38.38	598.88	598.91
2BU	49+56.38	-38.38	598.68	598.72
2BV	49+66.38	-38.38	598.47	598.53
2BW	49+76.38	-38.38	598.26	598.35
2BX	49+86.38	-38.38	598.04	598.17
2BY	49+96.38	-38.38	597.82	597.99
2BZ	50+06.38	-38.38	597.60	597.81
2CA	50+16.38	-38.38	597.37	597.62
2CB	50+26.38	-38.38	597.14	597.43
2CC	50+36.38	-38.38	596.90	597.23
2CD	50+46.38	-38.38	596.66	597.02
2CE	50+56.38	-38.38	596.42	596.80
2CF	50+66.38	-38.38	596.17	596.58
2CG	50+76.38	-38.38	595.92	596.34
2CH	50+86.38	-38.38	595.66	596.09
2CI	50+96.38	-38.38	595.40	595.83
2CJ	51+06.38	-38.38	595.14	595.56
2CK	51+16.38	-38.38	594.87	595.28
2CL	51+26.38	-38.38	594.60	594.99
2CM	51+36.38	-38.38	594.32	594.69
2CN	51+46.38	-38.38	594.04	594.37
2CO	51+56.38	-38.38	593.75	594.05
2CP	51+66.38	-38.38	593.47	593.72
2CQ	51+76.38	-38.38	593.17	593.37
2CR	51+86.38	-38.38	592.88	593.02
2CS	51+96.38	-38.38	592.58	592.67
⌒ W BRG PIER 5 WB	52+08.38	-38.38	592.21	592.23
⌒ PIER 5 WB	52+09.88	-38.38	592.17	592.19

NORTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
⌒ PIER 2 WB	42+01.21	-36.00	602.90	602.92
⌒ E BRG PIER 2 WB	42+02.38	-36.00	602.91	602.93
2A	42+12.38	-36.00	603.00	603.09
2B	42+22.38	-36.00	603.09	603.24
2C	42+32.38	-36.00	603.18	603.39
2D	42+42.38	-36.00	603.26	603.53
2E	42+52.38	-36.00	603.34	603.66
2F	42+62.38	-36.00	603.41	603.78
2G	42+72.38	-36.00	603.48	603.88
2H	42+82.38	-36.00	603.54	603.98
2I	42+92.38	-36.00	603.61	604.07
2J	43+02.38	-36.00	603.66	604.14
2K	43+12.38	-36.00	603.72	604.21
2L	43+22.38	-36.00	603.77	604.26
2M	43+32.38	-36.00	603.81	604.30
2N	43+42.38	-36.00	603.85	604.33
2O	43+52.38	-36.00	603.89	604.35
2P	43+62.38	-36.00	603.92	604.36
2Q	43+72.38	-36.00	603.95	604.36
2R	43+82.38	-36.00	603.98	604.35
2S	43+92.38	-36.00	604.00	604.33
2T	44+02.38	-36.00	604.02	604.30
2U	44+12.38	-36.00	604.03	604.27
2V	44+22.38	-36.00	604.04	604.23
2W	44+32.38	-36.00	604.04	604.19
2X	44+42.38	-36.00	604.05	604.16
2Y	44+52.38	-36.00	604.04	604.12
2Z	44+62.38	-36.00	604.04	604.09
2AA	44+72.38	-36.00	604.03	604.06
2AB	44+82.38	-36.00	604.01	604.03
2AC	44+92.38	-36.00	603.99	604.01
⌒ BRG. PIER 3 WB	45+02.38	-36.00	603.97	603.99
2AD	45+12.38	-36.00	603.94	603.98
2AE	45+22.38	-36.00	603.91	603.97
2AF	45+32.38	-36.00	603.88	603.97
2AG	45+42.38	-36.00	603.84	603.97
2AH	45+52.38	-36.00	603.80	603.97
2AI	45+62.38	-36.00	603.75	603.97
2AJ	45+72.38	-36.00	603.70	603.98
2AK	45+82.38	-36.00	603.64	603.98
2AL	45+92.38	-36.00	603.59	603.98
2AM	46+02.38	-36.00	603.52	603.98
2AN	46+12.38	-36.00	603.46	603.97
2AO	46+22.38	-36.00	603.39	603.96
2AP	46+32.38	-36.00	603.31	603.93
2AQ	46+42.38	-36.00	603.23	603.90
2AR	46+52.38	-36.00	603.15	603.86
2AS	46+62.38	-36.00	603.06	603.80
2AT	46+72.38	-36.00	602.97	603.74
2AU	46+82.38	-36.00	602.88	603.67
2AV	46+92.38	-36.00	602.78	603.59
2AW	47+02.38	-36.00	602.68	603.49
2AX	47+12.38	-36.00	602.57	603.39
2AY	47+22.38	-36.00	602.46	603.27
2AZ	47+32.38	-36.00	602.34	603.15

NORTH EDGE OF NORTH LANE - WB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-36.00	602.23	603.01
2BB	47+52.38	-36.00	602.10	602.86
2BC	47+62.38	-36.00	601.98	602.71
2BD	47+72.38	-36.00	601.85	602.54
2BE	47+82.38	-36.00	601.71	602.36
2BF	47+92.38	-36.00	601.57	602.17
2BG	48+02.38	-36.00	601.43	601.98
2BH	48+12.38	-36.00	601.28	601.77
2BI	48+22.38	-36.00	601.13	601.56
2BJ	48+32.38	-36.00	600.98	601.35
2BK	48+42.38	-36.00	600.82	601.13
2BL	48+52.38	-36.00	600.66	600.91
2BM	48+62.38	-36.00	600.49	600.69
2BN	48+72.38	-36.00	600.32	600.47
2BO	48+82.38	-36.00	600.14	600.25
2BP	48+92.38	-36.00	599.97	600.04
2BQ	49+02.38	-36.00	599.78	599.83
⌒ BRG. PIER 4 WB	49+16.38	-36.00	599.52	599.54
2BR	49+26.38	-36.00	599.33	599.34
2BS	49+36.38	-36.00	599.13	599.15
2BT	49+46.38	-36.00	598.93	598.96
2BU	49+56.38	-36.00	598.73	598.77
2BV	49+66.38	-36.00	598.52	598.58
2BW	49+76.38	-36.00	598.31	598.40
2BX	49+86.38	-36.00	598.09	598.22
2BY	49+96.38	-36.00	597.87	598.04
2BZ	50+06.38	-36.00	597.65	597.85
2CA	50+16.38	-36.00	597.42	597.67
2CB	50+26.38	-36.00	597.19	597.47
2CC	50+36.38	-36.00	596.95	597.27
2CD	50+46.38	-36.00	596.71	597.07
2CE	50+56.38	-36.00	596.46	596.85
2CF	50+66.38	-36.00	596.22	596.62
2CG	50+76.38	-36.00	595.96	596.39
2CH	50+86.38	-36.00	595.71	596.14
2CI	50+96.38	-36.00	595.45	595.88
2CJ	51+06.38	-36.00	595.18	595.61
2CK	51+16.38	-36.00	594.91	595.33
2CL	51+26.38	-36.00	594.64	595.04
2CM	51+36.38	-36.00	594.37	594.73
2CN	51+46.38	-36.00	594.09	594.42
2CO	51+56.38	-36.00	593.80	594.10
2CP	51+66.38	-36.00	593.51	593.76
2CQ	51+76.38	-36.00	593.22	593.42
2CR	51+86.38	-36.00	592.93	593.07
2CS	51+96.38	-36.00	592.62	592.72
⌒ W BRG PIER 5 WB	52+08.38	-36.00	592.26	592.28
⌒ PIER 5 WB	52+09.88	-36.00	592.21	592.23

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 100,000 ' / in.
PLOT DATE	= 11/5/2025

DESIGNED	-	LAS
CHECKED	-	PJL
DRAWN	-	GM
CHECKED	-	LAS

REVISED	-
REVISED	-
REVISED	-
REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 4 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-47 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	628
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\wsp\transystems-pw\hntb\comtrans\corp\pw\hntb\comtrans\documents\projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structural\0998309-42R23-5270-DEW\07.dgn

GIRDER W4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	-28.79	603.01	603.03
☐ E BRG PIER 2 WB	42+02.38	-28.79	603.02	603.04
2A	42+12.38	-28.79	603.11	603.20
2B	42+22.38	-28.79	603.20	603.35
2C	42+32.38	-28.79	603.29	603.50
2D	42+42.38	-28.79	603.37	603.63
2E	42+52.38	-28.79	603.44	603.76
2F	42+62.38	-28.79	603.52	603.88
2G	42+72.38	-28.79	603.59	603.99
2H	42+82.38	-28.79	603.65	604.09
2I	42+92.38	-28.79	603.71	604.18
2J	43+02.38	-28.79	603.77	604.25
2K	43+12.38	-28.79	603.82	604.32
2L	43+22.38	-28.79	603.87	604.37
2M	43+32.38	-28.79	603.92	604.41
2N	43+42.38	-28.79	603.96	604.44
2O	43+52.38	-28.79	604.00	604.46
2P	43+62.38	-28.79	604.03	604.47
2Q	43+72.38	-28.79	604.06	604.47
2R	43+82.38	-28.79	604.09	604.46
2S	43+92.38	-28.79	604.11	604.44
2T	44+02.38	-28.79	604.12	604.41
2U	44+12.38	-28.79	604.14	604.38
2V	44+22.38	-28.79	604.15	604.34
2W	44+32.38	-28.79	604.15	604.30
2X	44+42.38	-28.79	604.15	604.26
2Y	44+52.38	-28.79	604.15	604.23
2Z	44+62.38	-28.79	604.14	604.20
2AA	44+72.38	-28.79	604.13	604.17
2AB	44+82.38	-28.79	604.12	604.14
2AC	44+92.38	-28.79	604.10	604.12
☐ BRG. PIER 3 WB	45+02.38	-28.79	604.08	604.10
2AD	45+12.38	-28.79	604.05	604.09
2AE	45+22.38	-28.79	604.02	604.08
2AF	45+32.38	-28.79	603.99	604.08
2AG	45+42.38	-28.79	603.95	604.07
2AH	45+52.38	-28.79	603.90	604.08
2AI	45+62.38	-28.79	603.86	604.08
2AJ	45+72.38	-28.79	603.81	604.08
2AK	45+82.38	-28.79	603.75	604.09
2AL	45+92.38	-28.79	603.69	604.09
2AM	46+02.38	-28.79	603.63	604.09
2AN	46+12.38	-28.79	603.56	604.08
2AO	46+22.38	-28.79	603.49	604.06
2AP	46+32.38	-28.79	603.42	604.04
2AQ	46+42.38	-28.79	603.34	604.01
2AR	46+52.38	-28.79	603.26	603.96
2AS	46+62.38	-28.79	603.17	603.91
2AT	46+72.38	-28.79	603.08	603.85
2AU	46+82.38	-28.79	602.99	603.78
2AV	46+92.38	-28.79	602.89	603.70
2AW	47+02.38	-28.79	602.78	603.60
2AX	47+12.38	-28.79	602.68	603.50
2AY	47+22.38	-28.79	602.57	603.38
2AZ	47+32.38	-28.79	602.45	603.26

GIRDER W4 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-28.79	602.33	603.12
2BB	47+52.38	-28.79	602.21	602.97
2BC	47+62.38	-28.79	602.08	602.81
2BD	47+72.38	-28.79	601.95	602.65
2BE	47+82.38	-28.79	601.82	602.47
2BF	47+92.38	-28.79	601.68	602.28
2BG	48+02.38	-28.79	601.54	602.09
2BH	48+12.38	-28.79	601.39	601.88
2BI	48+22.38	-28.79	601.24	601.67
2BJ	48+32.38	-28.79	601.09	601.46
2BK	48+42.38	-28.79	600.93	601.24
2BL	48+52.38	-28.79	600.76	601.02
2BM	48+62.38	-28.79	600.60	600.80
2BN	48+72.38	-28.79	600.43	600.58
2BO	48+82.38	-28.79	600.25	600.36
2BP	48+92.38	-28.79	600.07	600.15
2BQ	49+02.38	-28.79	599.89	599.94
☐ BRG. PIER 4 WB	49+16.38	-28.79	599.63	599.65
2BR	49+26.38	-28.79	599.44	599.45
2BS	49+36.38	-28.79	599.24	599.26
2BT	49+46.38	-28.79	599.04	599.06
2BU	49+56.38	-28.79	598.84	598.87
2BV	49+66.38	-28.79	598.63	598.69
2BW	49+76.38	-28.79	598.41	598.51
2BX	49+86.38	-28.79	598.20	598.32
2BY	49+96.38	-28.79	597.98	598.14
2BZ	50+06.38	-28.79	597.75	597.96
2CA	50+16.38	-28.79	597.53	597.77
2CB	50+26.38	-28.79	597.29	597.58
2CC	50+36.38	-28.79	597.06	597.38
2CD	50+46.38	-28.79	596.82	597.17
2CE	50+56.38	-28.79	596.57	596.96
2CF	50+66.38	-28.79	596.32	596.73
2CG	50+76.38	-28.79	596.07	596.49
2CH	50+86.38	-28.79	595.82	596.25
2CI	50+96.38	-28.79	595.56	595.99
2CJ	51+06.38	-28.79	595.29	595.72
2CK	51+16.38	-28.79	595.02	595.44
2CL	51+26.38	-28.79	594.75	595.14
2CM	51+36.38	-28.79	594.47	594.84
2CN	51+46.38	-28.79	594.19	594.53
2CO	51+56.38	-28.79	593.91	594.21
2CP	51+66.38	-28.79	593.62	593.87
2CQ	51+76.38	-28.79	593.33	593.53
2CR	51+86.38	-28.79	593.03	593.18
2CS	51+96.38	-28.79	592.73	592.82
☐ W BRG PIER 5 WB	52+08.38	-28.79	592.37	592.39
☐ PIER 5 WB	52+09.88	-28.79	592.32	592.34

CROWN - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	-24.00	603.08	603.10
☐ E BRG PIER 2 WB	42+02.38	-24.00	603.09	603.11
2A	42+12.38	-24.00	603.18	603.27
2B	42+22.38	-24.00	603.27	603.42
2C	42+32.38	-24.00	603.36	603.57
2D	42+42.38	-24.00	603.44	603.71
2E	42+52.38	-24.00	603.52	603.84
2F	42+62.38	-24.00	603.59	603.96
2G	42+72.38	-24.00	603.66	604.06
2H	42+82.38	-24.00	603.72	604.16
2I	42+92.38	-24.00	603.79	604.25
2J	43+02.38	-24.00	603.84	604.32
2K	43+12.38	-24.00	603.90	604.39
2L	43+22.38	-24.00	603.95	604.44
2M	43+32.38	-24.00	603.99	604.48
2N	43+42.38	-24.00	604.03	604.51
2O	43+52.38	-24.00	604.07	604.53
2P	43+62.38	-24.00	604.10	604.54
2Q	43+72.38	-24.00	604.13	604.54
2R	43+82.38	-24.00	604.16	604.53
2S	43+92.38	-24.00	604.18	604.51
2T	44+02.38	-24.00	604.20	604.48
2U	44+12.38	-24.00	604.21	604.45
2V	44+22.38	-24.00	604.22	604.41
2W	44+32.38	-24.00	604.22	604.37
2X	44+42.38	-24.00	604.23	604.34
2Y	44+52.38	-24.00	604.22	604.30
2Z	44+62.38	-24.00	604.22	604.27
2AA	44+72.38	-24.00	604.21	604.24
2AB	44+82.38	-24.00	604.19	604.21
2AC	44+92.38	-24.00	604.17	604.19
☐ BRG. PIER 3 WB	45+02.38	-24.00	604.15	604.17
2AD	45+12.38	-24.00	604.12	604.16
2AE	45+22.38	-24.00	604.09	604.15
2AF	45+32.38	-24.00	604.06	604.15
2AG	45+42.38	-24.00	604.02	604.15
2AH	45+52.38	-24.00	603.98	604.15
2AI	45+62.38	-24.00	603.93	604.15
2AJ	45+72.38	-24.00	603.88	604.16
2AK	45+82.38	-24.00	603.82	604.16
2AL	45+92.38	-24.00	603.77	604.16
2AM	46+02.38	-24.00	603.70	604.16
2AN	46+12.38	-24.00	603.64	604.15
2AO	46+22.38	-24.00	603.57	604.14
2AP	46+32.38	-24.00	603.49	604.11
2AQ	46+42.38	-24.00	603.41	604.08
2AR	46+52.38	-24.00	603.33	604.04
2AS	46+62.38	-24.00	603.24	603.98
2AT	46+72.38	-24.00	603.15	603.92
2AU	46+82.38	-24.00	603.06	603.85
2AV	46+92.38	-24.00	602.96	603.77
2AW	47+02.38	-24.00	602.86	603.67
2AX	47+12.38	-24.00	602.75	603.57
2AY	47+22.38	-24.00	602.64	603.45
2AZ	47+32.38	-24.00	602.52	603.33

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\proj\transys\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structural\0998309-42R23-5271-DEW208.dgn

CROWN - WB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-24.00	602.41	603.19
2BB	47+52.38	-24.00	602.28	603.04
2BC	47+62.38	-24.00	602.16	602.89
2BD	47+72.38	-24.00	602.03	602.72
2BE	47+82.38	-24.00	601.89	602.54
2BF	47+92.38	-24.00	601.75	602.35
2BG	48+02.38	-24.00	601.61	602.16
2BH	48+12.38	-24.00	601.46	601.95
2BI	48+22.38	-24.00	601.31	601.74
2BJ	48+32.38	-24.00	601.16	601.53
2BK	48+42.38	-24.00	601.00	601.31
2BL	48+52.38	-24.00	600.84	601.09
2BM	48+62.38	-24.00	600.67	600.87
2BN	48+72.38	-24.00	600.50	600.65
2BO	48+82.38	-24.00	600.32	600.43
2BP	48+92.38	-24.00	600.15	600.22
2BQ	49+02.38	-24.00	599.96	600.01
⌒ BRG. PIER 4 WB	49+16.38	-24.00	599.70	599.72
2BR	49+26.38	-24.00	599.51	599.52
2BS	49+36.38	-24.00	599.31	599.33
2BT	49+46.38	-24.00	599.11	599.14
2BU	49+56.38	-24.00	598.91	598.95
2BV	49+66.38	-24.00	598.70	598.76
2BW	49+76.38	-24.00	598.49	598.58
2BX	49+86.38	-24.00	598.27	598.40
2BY	49+96.38	-24.00	598.05	598.22
2BZ	50+06.38	-24.00	597.83	598.03
2CA	50+16.38	-24.00	597.60	597.85
2CB	50+26.38	-24.00	597.37	597.65
2CC	50+36.38	-24.00	597.13	597.45
2CD	50+46.38	-24.00	596.89	597.25
2CE	50+56.38	-24.00	596.64	597.03
2CF	50+66.38	-24.00	596.40	596.80
2CG	50+76.38	-24.00	596.14	596.57
2CH	50+86.38	-24.00	595.89	596.32
2CI	50+96.38	-24.00	595.63	596.06
2CJ	51+06.38	-24.00	595.36	595.79
2CK	51+16.38	-24.00	595.09	595.51
2CL	51+26.38	-24.00	594.82	595.22
2CM	51+36.38	-24.00	594.55	594.91
2CN	51+46.38	-24.00	594.27	594.60
2CO	51+56.38	-24.00	593.98	594.28
2CP	51+66.38	-24.00	593.69	593.94
2CQ	51+76.38	-24.00	593.40	593.60
2CR	51+86.38	-24.00	593.11	593.25
2CS	51+96.38	-24.00	592.80	592.90
⌒ W BRG PIER 5 WB	52+08.38	-24.00	592.44	592.46
⌒ PIER 5 WB	52+09.88	-24.00	592.39	592.41

GIRDER W5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
⌒ PIER 2 WB	42+01.21	-19.21	603.01	603.03
⌒ E BRG PIER 2 WB	42+02.38	-19.21	603.02	603.04
2A	42+12.38	-19.21	603.11	603.20
2B	42+22.38	-19.21	603.20	603.35
2C	42+32.38	-19.21	603.29	603.50
2D	42+42.38	-19.21	603.37	603.63
2E	42+52.38	-19.21	603.44	603.76
2F	42+62.38	-19.21	603.52	603.88
2G	42+72.38	-19.21	603.59	603.99
2H	42+82.38	-19.21	603.65	604.09
2I	42+92.38	-19.21	603.71	604.18
2J	43+02.38	-19.21	603.77	604.25
2K	43+12.38	-19.21	603.82	604.32
2L	43+22.38	-19.21	603.87	604.37
2M	43+32.38	-19.21	603.92	604.41
2N	43+42.38	-19.21	603.96	604.44
2O	43+52.38	-19.21	604.00	604.46
2P	43+62.38	-19.21	604.03	604.47
2Q	43+72.38	-19.21	604.06	604.47
2R	43+82.38	-19.21	604.09	604.46
2S	43+92.38	-19.21	604.11	604.44
2T	44+02.38	-19.21	604.12	604.41
2U	44+12.38	-19.21	604.14	604.38
2V	44+22.38	-19.21	604.15	604.34
2W	44+32.38	-19.21	604.15	604.30
2X	44+42.38	-19.21	604.15	604.26
2Y	44+52.38	-19.21	604.15	604.23
2Z	44+62.38	-19.21	604.14	604.20
2AA	44+72.38	-19.21	604.13	604.17
2AB	44+82.38	-19.21	604.12	604.14
2AC	44+92.38	-19.21	604.10	604.12
⌒ BRG. PIER 3 WB	45+02.38	-19.21	604.08	604.10
2AD	45+12.38	-19.21	604.05	604.09
2AE	45+22.38	-19.21	604.02	604.08
2AF	45+32.38	-19.21	603.99	604.08
2AG	45+42.38	-19.21	603.95	604.07
2AH	45+52.38	-19.21	603.90	604.08
2AI	45+62.38	-19.21	603.86	604.08
2AJ	45+72.38	-19.21	603.81	604.08
2AK	45+82.38	-19.21	603.75	604.09
2AL	45+92.38	-19.21	603.69	604.09
2AM	46+02.38	-19.21	603.63	604.09
2AN	46+12.38	-19.21	603.56	604.08
2AO	46+22.38	-19.21	603.49	604.06
2AP	46+32.38	-19.21	603.42	604.04
2AQ	46+42.38	-19.21	603.34	604.01
2AR	46+52.38	-19.21	603.26	603.96
2AS	46+62.38	-19.21	603.17	603.91
2AT	46+72.38	-19.21	603.08	603.85
2AU	46+82.38	-19.21	602.99	603.78
2AV	46+92.38	-19.21	602.89	603.70
2AW	47+02.38	-19.21	602.78	603.60
2AX	47+12.38	-19.21	602.68	603.50
2AY	47+22.38	-19.21	602.57	603.38
2AZ	47+32.38	-19.21	602.45	603.26

GIRDER W5 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	-19.21	602.33	603.12
2BB	47+52.38	-19.21	602.21	602.97
2BC	47+62.38	-19.21	602.08	602.81
2BD	47+72.38	-19.21	601.95	602.65
2BE	47+82.38	-19.21	601.82	602.47
2BF	47+92.38	-19.21	601.68	602.28
2BG	48+02.38	-19.21	601.54	602.09
2BH	48+12.38	-19.21	601.39	601.88
2BI	48+22.38	-19.21	601.24	601.67
2BJ	48+32.38	-19.21	601.09	601.46
2BK	48+42.38	-19.21	600.93	601.24
2BL	48+52.38	-19.21	600.76	601.02
2BM	48+62.38	-19.21	600.60	600.80
2BN	48+72.38	-19.21	600.43	600.58
2BO	48+82.38	-19.21	600.25	600.36
2BP	48+92.38	-19.21	600.07	600.15
2BQ	49+02.38	-19.21	599.89	599.94
⌒ BRG. PIER 4 WB	49+16.38	-19.21	599.63	599.65
2BR	49+26.38	-19.21	599.44	599.45
2BS	49+36.38	-19.21	599.24	599.26
2BT	49+46.38	-19.21	599.04	599.06
2BU	49+56.38	-19.21	598.84	598.87
2BV	49+66.38	-19.21	598.63	598.69
2BW	49+76.38	-19.21	598.41	598.51
2BX	49+86.38	-19.21	598.20	598.32
2BY	49+96.38	-19.21	597.98	598.14
2BZ	50+06.38	-19.21	597.75	597.96
2CA	50+16.38	-19.21	597.53	597.77
2CB	50+26.38	-19.21	597.29	597.58
2CC	50+36.38	-19.21	597.06	597.38
2CD	50+46.38	-19.21	596.82	597.17
2CE	50+56.38	-19.21	596.57	596.96
2CF	50+66.38	-19.21	596.32	596.73
2CG	50+76.38	-19.21	596.07	596.49
2CH	50+86.38	-19.21	595.82	596.25
2CI	50+96.38	-19.21	595.56	595.99
2CJ	51+06.38	-19.21	595.29	595.72
2CK	51+16.38	-19.21	595.02	595.44
2CL	51+26.38	-19.21	594.75	595.14
2CM	51+36.38	-19.21	594.47	594.84
2CN	51+46.38	-19.21	594.19	594.53
2CO	51+56.38	-19.21	593.91	594.21
2CP	51+66.38	-19.21	593.62	593.87
2CQ	51+76.38	-19.21	593.33	593.53
2CR	51+86.38	-19.21	593.03	593.18
2CS	51+96.38	-19.21	592.73	592.82
⌒ W BRG PIER 5 WB	52+08.38	-19.21	592.37	592.39
⌒ PIER 5 WB	52+09.88	-19.21	592.32	592.34

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 6 - UNIT 2 WB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-49 OF 5-333 SHEETS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	630
		PLOT SCALE = 100,000 ' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: pw://transystems-pw.bentley.com/transystems-pw1-hosted/Documents/Projects 2018/CH401/401180022/03-WSP/CAD/62R23-RB-1/Sheets/Structural/09988309-62R23-S222-DEW209.dgn

MODEL: Default
FILE NAME: DWG

wsp

WSP USA Inc.
30 N. LASALLE STREET
SUITE 4200
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SLAB ELEVATIONS 7 - UNIT 2 WB
MBER 099-8309 WB AND 099-8325 EB

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	631
		CONTRACT NO. 62R23		
ILLINOIS		FED. AID PROJECT		

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

GIRDER W6 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
Ç BRG. PIER 4 WB	2BA	47+42.38	-9.62	602.18	602.96
	2BB	47+52.38	-9.62	602.06	602.81
	2BC	47+62.38	-9.62	601.93	602.66
	2BD	47+72.38	-9.62	601.80	602.49
	2BE	47+82.38	-9.62	601.66	602.31
	2BF	47+92.38	-9.62	601.52	602.13
	2BG	48+02.38	-9.62	601.38	601.93
	2BH	48+12.38	-9.62	601.24	601.73
	2BI	48+22.38	-9.62	601.08	601.52
	2BJ	48+32.38	-9.62	600.93	601.30
	2BK	48+42.38	-9.62	600.77	601.08
	2BL	48+52.38	-9.62	600.61	600.86
	2BM	48+62.38	-9.62	600.44	600.64
	2BN	48+72.38	-9.62	600.27	600.42
	2BO	48+82.38	-9.62	600.10	600.21
	2BP	48+92.38	-9.62	599.92	599.99
	2BQ	49+02.38	-9.62	599.74	599.78
	2BR	49+16.38	-9.62	599.47	599.49
	2BS	49+26.38	-9.62	599.28	599.30
	2BT	49+36.38	-9.62	599.08	599.10
	2BU	49+46.38	-9.62	598.88	598.91
	2BU	49+56.38	-9.62	598.68	598.72
	2BV	49+66.38	-9.62	598.47	598.53
	2BW	49+76.38	-9.62	598.26	598.35
	2BX	49+86.38	-9.62	598.04	598.17
	2BY	49+96.38	-9.62	597.82	597.99
	2BZ	50+06.38	-9.62	597.60	597.81
	2CA	50+16.38	-9.62	597.37	597.62
	2CB	50+26.38	-9.62	597.14	597.43
	2CC	50+36.38	-9.62	596.90	597.23
	2CD	50+46.38	-9.62	596.66	597.02
	2CE	50+56.38	-9.62	596.42	596.80
	2CF	50+66.38	-9.62	596.17	596.58
2CG	50+76.38	-9.62	595.92	596.34	
2CH	50+86.38	-9.62	595.66	596.09	
2CI	50+96.38	-9.62	595.40	595.83	
2CJ	51+06.38	-9.62	595.14	595.56	
2CK	51+16.38	-9.62	594.87	595.28	
2CL	51+26.38	-9.62	594.60	594.99	
2CM	51+36.38	-9.62	594.32	594.69	
2CN	51+46.38	-9.62	594.04	594.37	
2CO	51+56.38	-9.62	593.75	594.05	
2CP	51+66.38	-9.62	593.47	593.72	
2CQ	51+76.38	-9.62	593.17	593.37	
2CR	51+86.38	-9.62	592.88	593.02	
2CS	51+96.38	-9.62	592.58	592.67	
Ç W BRG PIER 5 WB	52+08.38	-9.62	592.21	592.23	
Ç PIER 5 WB	52+09.88	-9.62	592.17	592.19	

GIRDER W7

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	-0.04	602.66	602.68
☐ E BRG PIER 2 WB	42+02.38	-0.04	602.67	602.69
2A	42+12.38	-0.04	602.76	602.85
2B	42+22.38	-0.04	602.85	603.00
2C	42+32.38	-0.04	602.94	603.15
2D	42+42.38	-0.04	603.02	603.29
2E	42+52.38	-0.04	603.10	603.42
2F	42+62.38	-0.04	603.17	603.54
2G	42+72.38	-0.04	603.24	603.65
2H	42+82.38	-0.04	603.31	603.74
2I	42+92.38	-0.04	603.37	603.83
2J	43+02.38	-0.04	603.42	603.91
2K	43+12.38	-0.04	603.48	603.97
2L	43+22.38	-0.04	603.53	604.02
2M	43+32.38	-0.04	603.57	604.06
2N	43+42.38	-0.04	603.61	604.09
2O	43+52.38	-0.04	603.65	604.11
2P	43+62.38	-0.04	603.68	604.12
2Q	43+72.38	-0.04	603.71	604.12
2R	43+82.38	-0.04	603.74	604.11
2S	43+92.38	-0.04	603.76	604.09
2T	44+02.38	-0.04	603.78	604.06
2U	44+12.38	-0.04	603.79	604.03
2V	44+22.38	-0.04	603.80	603.99
2W	44+32.38	-0.04	603.81	603.96
2X	44+42.38	-0.04	603.81	603.92
2Y	44+52.38	-0.04	603.80	603.88
2Z	44+62.38	-0.04	603.80	603.85
2AA	44+72.38	-0.04	603.79	603.82
2AB	44+82.38	-0.04	603.77	603.79
2AC	44+92.38	-0.04	603.75	603.77
☐ BRG. PIER 3 WB	45+02.38	-0.04	603.73	603.75
2AD	45+12.38	-0.04	603.70	603.74
2AE	45+22.38	-0.04	603.67	603.73
2AF	45+32.38	-0.04	603.64	603.73
2AG	45+42.38	-0.04	603.60	603.73
2AH	45+52.38	-0.04	603.56	603.73
2AI	45+62.38	-0.04	603.51	603.73
2AJ	45+72.38	-0.04	603.46	603.74
2AK	45+82.38	-0.04	603.40	603.74
2AL	45+92.38	-0.04	603.35	603.74
2AM	46+02.38	-0.04	603.28	603.74
2AN	46+12.38	-0.04	603.22	603.73
2AO	46+22.38	-0.04	603.15	603.72
2AP	46+32.38	-0.04	603.07	603.69
2AQ	46+42.38	-0.04	602.99	603.66
2AR	46+52.38	-0.04	602.91	603.62
2AS	46+62.38	-0.04	602.82	603.57
2AT	46+72.38	-0.04	602.73	603.50
2AU	46+82.38	-0.04	602.64	603.43
2AV	46+92.38	-0.04	602.54	603.35
2AW	47+02.38	-0.04	602.44	603.25
2AX	47+12.38	-0.04	602.33	603.15
2AY	47+22.38	-0.04	602.22	603.04
2AZ	47+32.38	-0.04	602.10	602.91

GIRDER W7 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
C BRG. PIER 4 WB	2BA	47+42.38	-0.04	601.99	602.77
	2BB	47+52.38	-0.04	601.86	602.62
	2BC	47+62.38	-0.04	601.74	602.47
	2BD	47+72.38	-0.04	601.61	602.30
	2BE	47+82.38	-0.04	601.47	602.12
	2BF	47+92.38	-0.04	601.33	601.93
	2BG	48+02.38	-0.04	601.19	601.74
	2BH	48+12.38	-0.04	601.04	601.54
	2BI	48+22.38	-0.04	600.89	601.33
	2BJ	48+32.38	-0.04	600.74	601.11
	2BK	48+42.38	-0.04	600.58	600.89
	2BL	48+52.38	-0.04	600.42	600.67
	2BM	48+62.38	-0.04	600.25	600.45
	2BN	48+72.38	-0.04	600.08	600.23
	2BO	48+82.38	-0.04	599.90	600.02
	2BP	48+92.38	-0.04	599.73	599.80
	2BQ	49+02.38	-0.04	599.54	599.59
	2BR	49+16.38	-0.04	599.28	599.30
	2BS	49+26.38	-0.04	599.09	599.10
	2BT	49+36.38	-0.04	598.89	598.91
	2BU	49+46.38	-0.04	598.69	598.72
	2BV	49+56.38	-0.04	598.49	598.53
	2BW	49+66.38	-0.04	598.28	598.34
	2BX	49+76.38	-0.04	598.07	598.16
	2BY	49+86.38	-0.04	597.85	597.98
	2BZ	49+96.38	-0.04	597.63	597.80
	2CA	50+06.38	-0.04	597.41	597.61
	2CB	50+16.38	-0.04	597.18	597.43
	2CC	50+26.38	-0.04	596.95	597.23
	2CD	50+36.38	-0.04	596.71	597.04
	2CE	50+46.38	-0.04	596.47	596.83
	2CF	50+56.38	-0.04	596.23	596.61
	2CG	50+66.38	-0.04	595.98	596.38
	2CH	50+76.38	-0.04	595.72	596.15
2CI	50+86.38	-0.04	595.47	595.90	
2CJ	50+96.38	-0.04	595.21	595.64	
2CK	51+06.38	-0.04	594.94	595.37	
2CL	51+16.38	-0.04	594.68	595.09	
2CM	51+26.38	-0.04	594.40	594.80	
2CN	51+36.38	-0.04	594.13	594.49	
2CO	51+46.38	-0.04	593.85	594.18	
2CP	51+56.38	-0.04	593.56	593.86	
2CQ	51+66.38	-0.04	593.27	593.53	
2CR	51+76.38	-0.04	592.98	593.18	
2CS	51+86.38	-0.04	592.69	592.83	
2CS	51+96.38	-0.04	592.39	592.48	
C W BRG PIER 5 WB	52+08.38	-0.04	592.02	592.04	
C PIER 5 WB	52+09.88	-0.04	591.97	591.99	

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

PGL I-80 WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☑ PIER 2 WB	42+01.21	0.00	602.66	602.68
☑ E BRG PIER 2 WB	42+02.38	0.00	602.67	602.69
2A	42+12.38	0.00	602.76	602.85
2B	42+22.38	0.00	602.85	603.00
2C	42+32.38	0.00	602.94	603.15
2D	42+42.38	0.00	603.02	603.29
2E	42+52.38	0.00	603.10	603.42
2F	42+62.38	0.00	603.17	603.54
2G	42+72.38	0.00	603.24	603.64
2H	42+82.38	0.00	603.30	603.74
2I	42+92.38	0.00	603.37	603.83
2J	43+02.38	0.00	603.42	603.90
2K	43+12.38	0.00	603.48	603.97
2L	43+22.38	0.00	603.53	604.02
2M	43+32.38	0.00	603.57	604.06
2N	43+42.38	0.00	603.61	604.09
2O	43+52.38	0.00	603.65	604.11
2P	43+62.38	0.00	603.68	604.12
2Q	43+72.38	0.00	603.71	604.12
2R	43+82.38	0.00	603.74	604.11
2S	43+92.38	0.00	603.76	604.09
2T	44+02.38	0.00	603.78	604.06
2U	44+12.38	0.00	603.79	604.03
2V	44+22.38	0.00	603.80	603.99
2W	44+32.38	0.00	603.80	603.95
2X	44+42.38	0.00	603.81	603.92
2Y	44+52.38	0.00	603.80	603.88
2Z	44+62.38	0.00	603.80	603.85
2AA	44+72.38	0.00	603.79	603.82
2AB	44+82.38	0.00	603.77	603.79
2AC	44+92.38	0.00	603.75	603.77
☑ BRG. PIER 3 WB	45+02.38	0.00	603.73	603.75
2AD	45+12.38	0.00	603.70	603.74
2AE	45+22.38	0.00	603.67	603.73
2AF	45+32.38	0.00	603.64	603.73
2AG	45+42.38	0.00	603.60	603.73
2AH	45+52.38	0.00	603.56	603.73
2AI	45+62.38	0.00	603.51	603.73
2AJ	45+72.38	0.00	603.46	603.74
2AK	45+82.38	0.00	603.40	603.74
2AL	45+92.38	0.00	603.35	603.74
2AM	46+02.38	0.00	603.28	603.74
2AN	46+12.38	0.00	603.22	603.73
2AO	46+22.38	0.00	603.15	603.72
2AP	46+32.38	0.00	603.07	603.69
2AQ	46+42.38	0.00	602.99	603.66
2AR	46+52.38	0.00	602.91	603.62
2AS	46+62.38	0.00	602.82	603.56
2AT	46+72.38	0.00	602.73	603.50
2AU	46+82.38	0.00	602.64	603.43
2AV	46+92.38	0.00	602.54	603.35
2AW	47+02.38	0.00	602.44	603.25
2AX	47+12.38	0.00	602.33	603.15
2AY	47+22.38	0.00	602.22	603.03
2AZ	47+32.38	0.00	602.10	602.91

PGL I-80 WB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
C BRG. PIER 4 WB	2BA	47+42.38	0.00	601.99	602.77
	2BB	47+52.38	0.00	601.86	602.62
	2BC	47+62.38	0.00	601.74	602.47
	2BD	47+72.38	0.00	601.61	602.30
	2BE	47+82.38	0.00	601.47	602.12
	2BF	47+92.38	0.00	601.33	601.93
	2BG	48+02.38	0.00	601.19	601.74
	2BH	48+12.38	0.00	601.04	601.53
	2BI	48+22.38	0.00	600.89	601.32
	2BJ	48+32.38	0.00	600.74	601.11
	2BK	48+42.38	0.00	600.58	600.89
	2BL	48+52.38	0.00	600.42	600.67
	2BM	48+62.38	0.00	600.25	600.45
	2BN	48+72.38	0.00	600.08	600.23
	2BO	48+82.38	0.00	599.90	600.01
	2BP	48+92.38	0.00	599.73	599.80
	2BQ	49+02.38	0.00	599.54	599.59
	2BR	49+16.38	0.00	599.28	599.30
	2BS	49+26.38	0.00	599.09	599.10
	2BT	49+36.38	0.00	598.89	598.91
	2BU	49+46.38	0.00	598.69	598.72
	2BU	49+56.38	0.00	598.49	598.53
	2BV	49+66.38	0.00	598.28	598.34
	2BW	49+76.38	0.00	598.07	598.16
	2BX	49+86.38	0.00	597.85	597.98
	2BY	49+96.38	0.00	597.63	597.80
	2BZ	50+06.38	0.00	597.41	597.61
	2CA	50+16.38	0.00	597.18	597.43
	2CB	50+26.38	0.00	596.95	597.23
	2CC	50+36.38	0.00	596.71	597.03
	2CD	50+46.38	0.00	596.47	596.83
	2CE	50+56.38	0.00	596.22	596.61
2CF	50+66.38	0.00	595.98	596.38	
2CG	50+76.38	0.00	595.72	596.15	
2CH	50+86.38	0.00	595.47	595.90	
2CI	50+96.38	0.00	595.21	595.64	
2CJ	51+06.38	0.00	594.94	595.37	
2CK	51+16.38	0.00	594.67	595.09	
2CL	51+26.38	0.00	594.40	594.80	
2CM	51+36.38	0.00	594.13	594.49	
2CN	51+46.38	0.00	593.85	594.18	
2CO	51+56.38	0.00	593.56	593.86	
2CP	51+66.38	0.00	593.27	593.52	
2CQ	51+76.38	0.00	592.98	593.18	
2CR	51+86.38	0.00	592.69	592.83	
2CS	51+96.38	0.00	592.38	592.48	
C W BRG PIER 5 WB	52+08.38	0.00	592.02	592.04	
C PIER 5 WB	52+09.88	0.00	591.97	591.99	

GIRDER W8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 WB	42+01.21	9.54	602.47	602.49
☐ E BRG PIER 2 WB	42+02.38	9.54	602.48	602.50
2A	42+12.38	9.54	602.57	602.66
2B	42+22.38	9.54	602.66	602.81
2C	42+32.38	9.54	602.75	602.96
2D	42+42.38	9.54	602.83	603.10
2E	42+52.38	9.54	602.91	603.22
2F	42+62.38	9.54	602.98	603.34
2G	42+72.38	9.54	603.05	603.45
2H	42+82.38	9.54	603.11	603.55
2I	42+92.38	9.54	603.18	603.64
2J	43+02.38	9.54	603.23	603.71
2K	43+12.38	9.54	603.29	603.78
2L	43+22.38	9.54	603.34	603.83
2M	43+32.38	9.54	603.38	603.87
2N	43+42.38	9.54	603.42	603.90
2O	43+52.38	9.54	603.46	603.92
2P	43+62.38	9.54	603.49	603.93
2Q	43+72.38	9.54	603.52	603.93
2R	43+82.38	9.54	603.55	603.92
2S	43+92.38	9.54	603.57	603.90
2T	44+02.38	9.54	603.59	603.87
2U	44+12.38	9.54	603.60	603.84
2V	44+22.38	9.54	603.61	603.80
2W	44+32.38	9.54	603.61	603.76
2X	44+42.38	9.54	603.61	603.73
2Y	44+52.38	9.54	603.61	603.69
2Z	44+62.38	9.54	603.61	603.66
2AA	44+72.38	9.54	603.59	603.63
2AB	44+82.38	9.54	603.58	603.60
2AC	44+92.38	9.54	603.56	603.58
☐ BRG. PIER 3 WB	45+02.38	9.54	603.54	603.56
2AD	45+12.38	9.54	603.51	603.55
2AE	45+22.38	9.54	603.48	603.54
2AF	45+32.38	9.54	603.45	603.54
2AG	45+42.38	9.54	603.41	603.53
2AH	45+52.38	9.54	603.37	603.54
2AI	45+62.38	9.54	603.32	603.54
2AJ	45+72.38	9.54	603.27	603.55
2AK	45+82.38	9.54	603.21	603.55
2AL	45+92.38	9.54	603.15	603.55
2AM	46+02.38	9.54	603.09	603.55
2AN	46+12.38	9.54	603.03	603.54
2AO	46+22.38	9.54	602.95	603.53
2AP	46+32.38	9.54	602.88	603.50
2AQ	46+42.38	9.54	602.80	603.47
2AR	46+52.38	9.54	602.72	603.43
2AS	46+62.38	9.54	602.63	603.37
2AT	46+72.38	9.54	602.54	603.31
2AU	46+82.38	9.54	602.45	603.24
2AV	46+92.38	9.54	602.35	603.16
2AW	47+02.38	9.54	602.25	603.06
2AX	47+12.38	9.54	602.14	602.96
2AY	47+22.38	9.54	602.03	602.84
2AZ	47+32.38	9.54	601.91	602.72

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\proj\transys\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structural\0998309-42R23-5275-DEW212.dgn

GIRDER W8 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	9.54	601.79	602.58
2BB	47+52.38	9.54	601.67	602.43
2BC	47+62.38	9.54	601.55	602.27
2BD	47+72.38	9.54	601.41	602.11
2BE	47+82.38	9.54	601.28	601.93
2BF	47+92.38	9.54	601.14	601.74
2BG	48+02.38	9.54	601.00	601.55
2BH	48+12.38	9.54	600.85	601.34
2BI	48+22.38	9.54	600.70	601.13
2BJ	48+32.38	9.54	600.55	600.92
2BK	48+42.38	9.54	600.39	600.70
2BL	48+52.38	9.54	600.23	600.48
2BM	48+62.38	9.54	600.06	600.26
2BN	48+72.38	9.54	599.89	600.04
2BO	48+82.38	9.54	599.71	599.82
2BP	48+92.38	9.54	599.53	599.61
2BQ	49+02.38	9.54	599.35	599.40
⌀ BRG. PIER 4 WB	49+16.38	9.54	599.09	599.11
2BR	49+26.38	9.54	598.90	598.91
2BS	49+36.38	9.54	598.70	598.72
2BT	49+46.38	9.54	598.50	598.52
2BU	49+56.38	9.54	598.30	598.34
2BV	49+66.38	9.54	598.09	598.15
2BW	49+76.38	9.54	597.88	597.97
2BX	49+86.38	9.54	597.66	597.79
2BY	49+96.38	9.54	597.44	597.61
2BZ	50+06.38	9.54	597.21	597.42
2CA	50+16.38	9.54	596.99	597.24
2CB	50+26.38	9.54	596.75	597.04
2CC	50+36.38	9.54	596.52	596.84
2CD	50+46.38	9.54	596.28	596.64
2CE	50+56.38	9.54	596.03	596.42
2CF	50+66.38	9.54	595.79	596.19
2CG	50+76.38	9.54	595.53	595.95
2CH	50+86.38	9.54	595.28	595.71
2CI	50+96.38	9.54	595.02	595.45
2CJ	51+06.38	9.54	594.75	595.18
2CK	51+16.38	9.54	594.48	594.90
2CL	51+26.38	9.54	594.21	594.61
2CM	51+36.38	9.54	593.94	594.30
2CN	51+46.38	9.54	593.66	593.99
2CO	51+56.38	9.54	593.37	593.67
2CP	51+66.38	9.54	593.08	593.33
2CQ	51+76.38	9.54	592.79	592.99
2CR	51+86.38	9.54	592.49	592.64
2CS	51+96.38	9.54	592.19	592.29
⌀ W BRG PIER 5 WB	52+08.38	9.54	591.83	591.85
⌀ PIER 5 WB	52+09.88	9.54	591.78	591.80

INSIDE FACE OF SOUTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
⌀ PIER 2 WB	42+01.21	12.00	602.42	602.44
⌀ E BRG PIER 2 WB	42+02.38	12.00	602.43	602.45
2A	42+12.38	12.00	602.52	602.61
2B	42+22.38	12.00	602.61	602.76
2C	42+32.38	12.00	602.70	602.91
2D	42+42.38	12.00	602.78	603.05
2E	42+52.38	12.00	602.86	603.18
2F	42+62.38	12.00	602.93	603.30
2G	42+72.38	12.00	603.00	603.40
2H	42+82.38	12.00	603.06	603.50
2I	42+92.38	12.00	603.13	603.59
2J	43+02.38	12.00	603.18	603.66
2K	43+12.38	12.00	603.24	603.73
2L	43+22.38	12.00	603.29	603.78
2M	43+32.38	12.00	603.33	603.82
2N	43+42.38	12.00	603.37	603.85
2O	43+52.38	12.00	603.41	603.87
2P	43+62.38	12.00	603.44	603.88
2Q	43+72.38	12.00	603.47	603.88
2R	43+82.38	12.00	603.50	603.87
2S	43+92.38	12.00	603.52	603.85
2T	44+02.38	12.00	603.54	603.82
2U	44+12.38	12.00	603.55	603.79
2V	44+22.38	12.00	603.56	603.75
2W	44+32.38	12.00	603.56	603.71
2X	44+42.38	12.00	603.57	603.68
2Y	44+52.38	12.00	603.56	603.64
2Z	44+62.38	12.00	603.56	603.61
2AA	44+72.38	12.00	603.55	603.58
2AB	44+82.38	12.00	603.53	603.55
2AC	44+92.38	12.00	603.51	603.53
⌀ BRG. PIER 3 WB	45+02.38	12.00	603.49	603.51
2AD	45+12.38	12.00	603.46	603.50
2AE	45+22.38	12.00	603.43	603.49
2AF	45+32.38	12.00	603.40	603.49
2AG	45+42.38	12.00	603.36	603.49
2AH	45+52.38	12.00	603.32	603.49
2AI	45+62.38	12.00	603.27	603.49
2AJ	45+72.38	12.00	603.22	603.50
2AK	45+82.38	12.00	603.16	603.50
2AL	45+92.38	12.00	603.11	603.50
2AM	46+02.38	12.00	603.04	603.50
2AN	46+12.38	12.00	602.98	603.49
2AO	46+22.38	12.00	602.91	603.48
2AP	46+32.38	12.00	602.83	603.45
2AQ	46+42.38	12.00	602.75	603.42
2AR	46+52.38	12.00	602.67	603.38
2AS	46+62.38	12.00	602.58	603.32
2AT	46+72.38	12.00	602.49	603.26
2AU	46+82.38	12.00	602.40	603.19
2AV	46+92.38	12.00	602.30	603.11
2AW	47+02.38	12.00	602.20	603.01
2AX	47+12.38	12.00	602.09	602.91
2AY	47+22.38	12.00	601.98	602.79
2AZ	47+32.38	12.00	601.86	602.67

INSIDE FACE OF SOUTH PARAPET - WB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+42.38	12.00	601.75	602.53
2BB	47+52.38	12.00	601.62	602.38
2BC	47+62.38	12.00	601.50	602.23
2BD	47+72.38	12.00	601.37	602.06
2BE	47+82.38	12.00	601.23	601.88
2BF	47+92.38	12.00	601.09	601.69
2BG	48+02.38	12.00	600.95	601.50
2BH	48+12.38	12.00	600.80	601.29
2BI	48+22.38	12.00	600.65	601.08
2BJ	48+32.38	12.00	600.50	600.87
2BK	48+42.38	12.00	600.34	600.65
2BL	48+52.38	12.00	600.18	600.43
2BM	48+62.38	12.00	600.01	600.21
2BN	48+72.38	12.00	599.84	599.99
2BO	48+82.38	12.00	599.66	599.77
2BP	48+92.38	12.00	599.49	599.56
2BQ	49+02.38	12.00	599.30	599.35
⌀ BRG. PIER 4 WB	49+16.38	12.00	599.04	599.06
2BR	49+26.38	12.00	598.85	598.86
2BS	49+36.38	12.00	598.65	598.67
2BT	49+46.38	12.00	598.45	598.48
2BU	49+56.38	12.00	598.25	598.29
2BV	49+66.38	12.00	598.04	598.10
2BW	49+76.38	12.00	597.83	597.92
2BX	49+86.38	12.00	597.61	597.74
2BY	49+96.38	12.00	597.39	597.56
2BZ	50+06.38	12.00	597.17	597.37
2CA	50+16.38	12.00	596.94	597.19
2CB	50+26.38	12.00	596.71	596.99
2CC	50+36.38	12.00	596.47	596.79
2CD	50+46.38	12.00	596.23	596.59
2CE	50+56.38	12.00	595.98	596.37
2CF	50+66.38	12.00	595.74	596.14
2CG	50+76.38	12.00	595.48	595.91
2CH	50+86.38	12.00	595.23	595.66
2CI	50+96.38	12.00	594.97	595.40
2CJ	51+06.38	12.00	594.70	595.13
2CK	51+16.38	12.00	594.43	594.85
2CL	51+26.38	12.00	594.16	594.56
2CM	51+36.38	12.00	593.89	594.25
2CN	51+46.38	12.00	593.61	593.94
2CO	51+56.38	12.00	593.32	593.62
2CP	51+66.38	12.00	593.03	593.28
2CQ	51+76.38	12.00	592.74	592.94
2CR	51+86.38	12.00	592.45	592.59
2CS	51+96.38	12.00	592.14	592.24
⌀ W BRG PIER 5 WB	52+08.38	12.00	591.78	591.80
⌀ PIER 5 WB	52+09.88	12.00	591.73	591.75

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 100,000 ' / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 10 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	634
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

SHEET 5-53 OF 5-333 SHEETS

MODEL Default:
FILE NAME: p:\proj\trans\systems-pw\bartley.com\trans\scorp\pw\labeled\Documents\Projects_2018\CH4001401180022\03-WSP\CD\62023-RB-1\Sheet\Structural\0998309-42R23-5272-DEE202.dgn

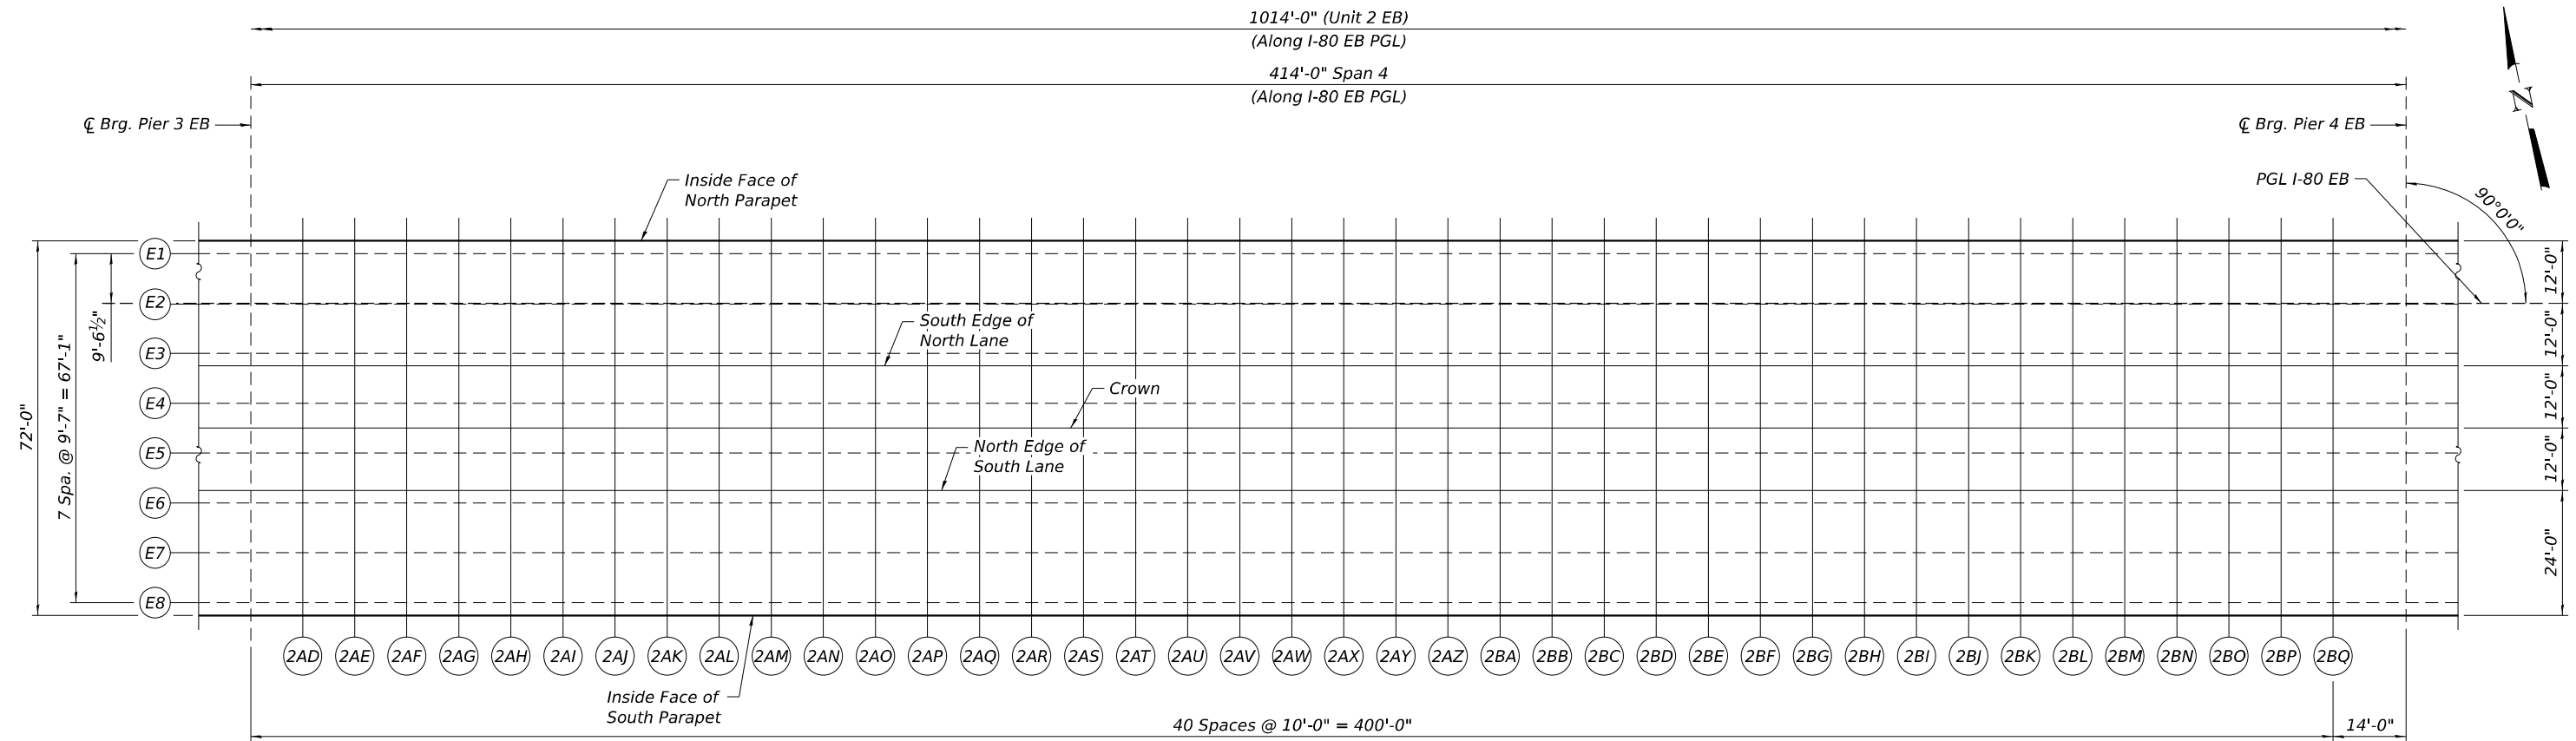

PARTIAL PLAN - UNIT 2 EB

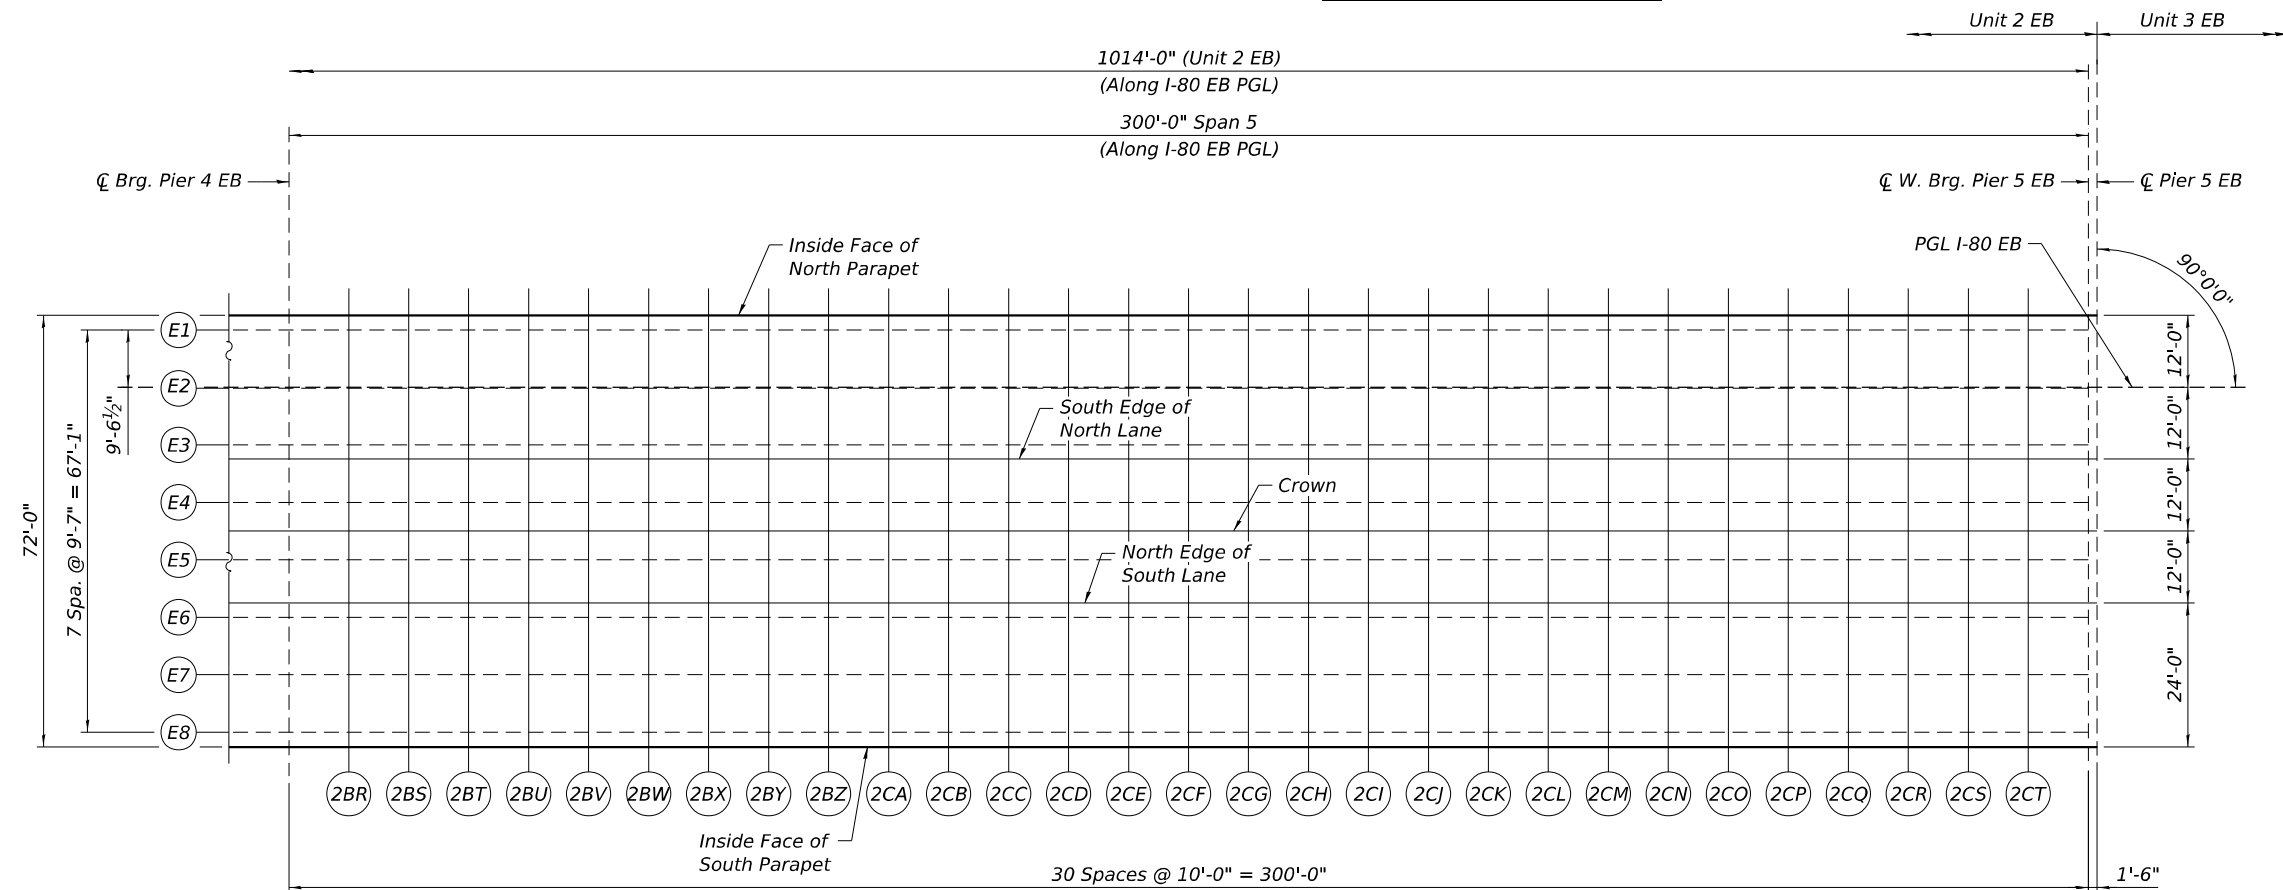

PARTIAL PLAN - UNIT 2 EB



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
CHECKED - PJL	CHECKED - LAS	REVISED -
PLOT SCALE = 32:0 " = 1" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION PLAN 2 - UNIT 2 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-55 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	636
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

GIRDER EI

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☪ PIER 2 EB	41+68.45	-9.54	602.13	602.15
☪ E BRG PIER 2 EB	41+69.62	-9.54	602.15	602.17
2A	41+79.62	-9.54	602.25	602.34
2B	41+89.62	-9.54	602.35	602.50
2C	41+99.62	-9.54	602.45	602.66
2D	42+09.62	-9.54	602.55	602.82
2E	42+19.62	-9.54	602.64	602.96
2F	42+29.62	-9.54	602.72	603.09
2G	42+39.62	-9.54	602.81	603.22
2H	42+49.62	-9.54	602.88	603.33
2I	42+59.62	-9.54	602.96	603.43
2J	42+69.62	-9.54	603.03	603.52
2K	42+79.62	-9.54	603.10	603.59
2L	42+89.62	-9.54	603.16	603.66
2M	42+99.62	-9.54	603.22	603.72
2N	43+09.62	-9.54	603.27	603.76
2O	43+19.62	-9.54	603.32	603.79
2P	43+29.62	-9.54	603.37	603.81
2Q	43+39.62	-9.54	603.41	603.82
2R	43+49.62	-9.54	603.45	603.83
2S	43+59.62	-9.54	603.48	603.82
2T	43+69.62	-9.54	603.51	603.81
2U	43+79.62	-9.54	603.54	603.79
2V	43+89.62	-9.54	603.56	603.76
2W	43+99.62	-9.54	603.58	603.74
2X	44+09.62	-9.54	603.60	603.71
2Y	44+19.62	-9.54	603.61	603.69
2Z	44+29.62	-9.54	603.61	603.67
2AA	44+39.62	-9.54	603.61	603.65
2AB	44+49.62	-9.54	603.61	603.64
2AC	44+59.62	-9.54	603.61	603.63
☪ BRG. PIER 3 EB	44+69.62	-9.54	603.60	603.62
2AD	44+79.62	-9.54	603.58	603.62
2AE	44+89.62	-9.54	603.57	603.62
2AF	44+99.62	-9.54	603.55	603.63
2AG	45+09.62	-9.54	603.52	603.64
2AH	45+19.62	-9.54	603.49	603.66
2AI	45+29.62	-9.54	603.46	603.67
2AJ	45+39.62	-9.54	603.42	603.69
2AK	45+49.62	-9.54	603.38	603.70
2AL	45+59.62	-9.54	603.33	603.72
2AM	45+69.62	-9.54	603.28	603.73
2AN	45+79.62	-9.54	603.23	603.73
2AO	45+89.62	-9.54	603.17	603.73
2AP	45+99.62	-9.54	603.11	603.71
2AQ	46+09.62	-9.54	603.04	603.69
2AR	46+19.62	-9.54	602.97	603.66
2AS	46+29.62	-9.54	602.90	603.62
2AT	46+39.62	-9.54	602.82	603.57
2AU	46+49.62	-9.54	602.74	603.51
2AV	46+59.62	-9.54	602.66	603.44
2AW	46+69.62	-9.54	602.57	603.36
2AX	46+79.62	-9.54	602.47	603.27
2AY	46+89.62	-9.54	602.38	603.17
2AZ	46+99.62	-9.54	602.27	603.05

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

GIRDER E1 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
C BRG. PIER 4 EB	2BA	47+09.62	-9.54	602.17	602.93
	2BB	47+19.62	-9.54	602.06	602.79
	2BC	47+29.62	-9.54	601.95	602.65
	2BD	47+39.62	-9.54	601.83	602.49
	2BE	47+49.62	-9.54	601.71	602.33
	2BF	47+59.62	-9.54	601.58	602.16
	2BG	47+69.62	-9.54	601.45	601.97
	2BH	47+79.62	-9.54	601.32	601.78
	2BI	47+89.62	-9.54	601.18	601.59
	2BJ	47+99.62	-9.54	601.04	601.39
	2BK	48+09.62	-9.54	600.89	601.18
	2BL	48+19.62	-9.54	600.74	600.98
	2BM	48+29.62	-9.54	600.59	600.77
	2BN	48+39.62	-9.54	600.43	600.57
	2BO	48+49.62	-9.54	600.27	600.37
	2BP	48+59.62	-9.54	600.10	600.17
	2BQ	48+69.62	-9.54	599.94	599.98
	2BR	48+83.62	-9.54	599.69	599.71
	2BS	48+93.62	-9.54	599.51	599.53
	2BT	49+03.62	-9.54	599.33	599.35
	2BU	49+13.62	-9.54	599.14	599.18
	2BV	49+23.62	-9.54	598.95	599.01
	2BW	49+33.62	-9.54	598.76	598.84
	2BX	49+43.62	-9.54	598.56	598.67
	2BY	49+53.62	-9.54	598.35	598.51
	2BZ	49+63.62	-9.54	598.15	598.35
	2CA	49+73.62	-9.54	597.93	598.18
	2CB	49+83.62	-9.54	597.72	598.01
	2CC	49+93.62	-9.54	597.50	597.84
	2CD	50+03.62	-9.54	597.28	597.66
	2CE	50+13.62	-9.54	597.05	597.46
	2CF	50+23.62	-9.54	596.82	597.26
	2CG	50+33.62	-9.54	596.58	597.05
	2CH	50+43.62	-9.54	596.34	596.83
	2CI	50+53.62	-9.54	596.10	596.60
	2CJ	50+63.62	-9.54	595.85	596.36
2CK	50+73.62	-9.54	595.60	596.10	
2CL	50+83.62	-9.54	595.35	595.84	
2CM	50+93.62	-9.54	595.09	595.56	
2CN	51+03.62	-9.54	594.83	595.27	
2CO	51+13.62	-9.54	594.56	594.97	
2CP	51+23.62	-9.54	594.29	594.66	
2CQ	51+33.62	-9.54	594.01	594.33	
2CR	51+43.62	-9.54	593.73	594.00	
2CS	51+53.62	-9.54	593.45	593.66	
2CT	51+63.62	-9.54	593.16	593.31	
2CT	51+73.62	-9.54	592.87	592.96	
C W BRG PIER 5 EB	51+83.62	-9.54	592.58	592.60	
C PIER 5 EB	51+85.12	-9.54	592.53	592.55	

PGL I-80 EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 EB	41+68.45	0.00	602.32	602.34
☐ E BRG PIER 2 EB	41+69.62	0.00	602.34	602.36
2A	41+79.62	0.00	602.44	602.53
2B	41+89.62	0.00	602.55	602.70
2C	41+99.62	0.00	602.64	602.86
2D	42+09.62	0.00	602.74	603.01
2E	42+19.62	0.00	602.83	603.15
2F	42+29.62	0.00	602.91	603.28
2G	42+39.62	0.00	603.00	603.41
2H	42+49.62	0.00	603.08	603.52
2I	42+59.62	0.00	603.15	603.62
2J	42+69.62	0.00	603.22	603.71
2K	42+79.62	0.00	603.29	603.79
2L	42+89.62	0.00	603.35	603.85
2M	42+99.62	0.00	603.41	603.91
2N	43+09.62	0.00	603.46	603.95
2O	43+19.62	0.00	603.51	603.98
2P	43+29.62	0.00	603.56	604.00
2Q	43+39.62	0.00	603.60	604.01
2R	43+49.62	0.00	603.64	604.02
2S	43+59.62	0.00	603.67	604.01
2T	43+69.62	0.00	603.70	604.00
2U	43+79.62	0.00	603.73	603.98
2V	43+89.62	0.00	603.75	603.95
2W	43+99.62	0.00	603.77	603.93
2X	44+09.62	0.00	603.79	603.90
2Y	44+19.62	0.00	603.80	603.88
2Z	44+29.62	0.00	603.80	603.86
2AA	44+39.62	0.00	603.81	603.84
2AB	44+49.62	0.00	603.80	603.83
2AC	44+59.62	0.00	603.80	603.82
☐ BRG. PIER 3 EB	44+69.62	0.00	603.79	603.81
2AD	44+79.62	0.00	603.78	603.81
2AE	44+89.62	0.00	603.76	603.82
2AF	44+99.62	0.00	603.74	603.82
2AG	45+09.62	0.00	603.71	603.83
2AH	45+19.62	0.00	603.68	603.85
2AI	45+29.62	0.00	603.65	603.86
2AJ	45+39.62	0.00	603.61	603.88
2AK	45+49.62	0.00	603.57	603.90
2AL	45+59.62	0.00	603.52	603.91
2AM	45+69.62	0.00	603.47	603.92
2AN	45+79.62	0.00	603.42	603.92
2AO	45+89.62	0.00	603.36	603.92
2AP	45+99.62	0.00	603.30	603.91
2AQ	46+09.62	0.00	603.23	603.89
2AR	46+19.62	0.00	603.17	603.85
2AS	46+29.62	0.00	603.09	603.81
2AT	46+39.62	0.00	603.01	603.76
2AU	46+49.62	0.00	602.93	603.70
2AV	46+59.62	0.00	602.85	603.63
2AW	46+69.62	0.00	602.76	603.55
2AX	46+79.62	0.00	602.66	603.46
2AY	46+89.62	0.00	602.57	603.36
2AZ	46+99.62	0.00	602.46	603.24

PGL 1-80 EB (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
C BRG. PIER 4 EB	2BA	47+09.62	0.00	602.36	603.12
	2BB	47+19.62	0.00	602.25	602.98
	2BC	47+29.62	0.00	602.14	602.84
	2BD	47+39.62	0.00	602.02	602.68
	2BE	47+49.62	0.00	601.90	602.52
	2BF	47+59.62	0.00	601.77	602.35
	2BG	47+69.62	0.00	601.64	602.16
	2BH	47+79.62	0.00	601.51	601.98
	2BI	47+89.62	0.00	601.37	601.78
	2BJ	47+99.62	0.00	601.23	601.58
	2BK	48+09.62	0.00	601.08	601.38
	2BL	48+19.62	0.00	600.93	601.17
	2BM	48+29.62	0.00	600.78	600.97
	2BN	48+39.62	0.00	600.62	600.76
	2BO	48+49.62	0.00	600.46	600.56
	2BP	48+59.62	0.00	600.30	600.36
	2BQ	48+69.62	0.00	600.13	600.17
	2BR	48+83.62	0.00	599.88	599.90
	2BS	48+93.62	0.00	599.70	599.72
	2BT	49+03.62	0.00	599.52	599.54
	2BU	49+13.62	0.00	599.33	599.37
	2BV	49+23.62	0.00	599.14	599.20
	2BW	49+33.62	0.00	598.95	599.03
	2BX	49+43.62	0.00	598.75	598.86
	2BY	49+53.62	0.00	598.54	598.70
	2BZ	49+63.62	0.00	598.34	598.54
	2CA	49+73.62	0.00	598.13	598.37
	2CB	49+83.62	0.00	597.91	598.20
	2CC	49+93.62	0.00	597.69	598.03
	2CD	50+03.62	0.00	597.47	597.85
	2CE	50+13.62	0.00	597.24	597.66
	2CF	50+23.62	0.00	597.01	597.46
	2CG	50+33.62	0.00	596.77	597.24
	2CH	50+43.62	0.00	596.54	597.02
	2CI	50+53.62	0.00	596.29	596.79
	2CJ	50+63.62	0.00	596.05	596.55
2CK	50+73.62	0.00	595.79	596.29	
2CL	50+83.62	0.00	595.54	596.03	
2CM	50+93.62	0.00	595.28	595.75	
2CN	51+03.62	0.00	595.02	595.46	
2CO	51+13.62	0.00	594.75	595.16	
2CP	51+23.62	0.00	594.48	594.85	
2CQ	51+33.62	0.00	594.20	594.53	
2CR	51+43.62	0.00	593.92	594.19	
2CS	51+53.62	0.00	593.64	593.85	
2CT	51+63.62	0.00	593.35	593.50	
2CT	51+73.62	0.00	593.06	593.15	
C W BRG PIER 5 EB	51+83.62	0.00	592.77	592.79	
C PIER 5 EB	51+85.12	0.00	592.72	592.74	

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 EB	41+68.45	0.04	602.32	602.35
☐ E BRG PIER 2 EB	41+69.62	0.04	602.34	602.36
2A	41+79.62	0.04	602.44	602.53
2B	41+89.62	0.04	602.55	602.70
2C	41+99.62	0.04	602.64	602.86
2D	42+09.62	0.04	602.74	603.01
2E	42+19.62	0.04	602.83	603.15
2F	42+29.62	0.04	602.92	603.28
2G	42+39.62	0.04	603.00	603.41
2H	42+49.62	0.04	603.08	603.52
2I	42+59.62	0.04	603.15	603.62
2J	42+69.62	0.04	603.22	603.71
2K	42+79.62	0.04	603.29	603.79
2L	42+89.62	0.04	603.35	603.85
2M	42+99.62	0.04	603.41	603.91
2N	43+09.62	0.04	603.46	603.95
2O	43+19.62	0.04	603.51	603.98
2P	43+29.62	0.04	603.56	604.00
2Q	43+39.62	0.04	603.60	604.02
2R	43+49.62	0.04	603.64	604.02
2S	43+59.62	0.04	603.68	604.01
2T	43+69.62	0.04	603.71	604.00
2U	43+79.62	0.04	603.73	603.98
2V	43+89.62	0.04	603.75	603.95
2W	43+99.62	0.04	603.77	603.93
2X	44+09.62	0.04	603.79	603.90
2Y	44+19.62	0.04	603.80	603.88
2Z	44+29.62	0.04	603.80	603.86
2AA	44+39.62	0.04	603.81	603.84
2AB	44+49.62	0.04	603.80	603.83
2AC	44+59.62	0.04	603.80	603.82
☐ BRG. PIER 3 EB	44+69.62	0.04	603.79	603.81
2AD	44+79.62	0.04	603.78	603.81
2AE	44+89.62	0.04	603.76	603.82
2AF	44+99.62	0.04	603.74	603.82
2AG	45+09.62	0.04	603.71	603.83
2AH	45+19.62	0.04	603.68	603.85
2AI	45+29.62	0.04	603.65	603.86
2AJ	45+39.62	0.04	603.61	603.88
2AK	45+49.62	0.04	603.57	603.90
2AL	45+59.62	0.04	603.52	603.91
2AM	45+69.62	0.04	603.47	603.92
2AN	45+79.62	0.04	603.42	603.92
2AO	45+89.62	0.04	603.36	603.92
2AP	45+99.62	0.04	603.30	603.91
2AQ	46+09.62	0.04	603.24	603.89
2AR	46+19.62	0.04	603.17	603.85
2AS	46+29.62	0.04	603.09	603.81
2AT	46+39.62	0.04	603.02	603.77
2AU	46+49.62	0.04	602.93	603.70
2AV	46+59.62	0.04	602.85	603.63
2AW	46+69.62	0.04	602.76	603.55
2AX	46+79.62	0.04	602.66	603.46
2AY	46+89.62	0.04	602.57	603.36
2AZ	46+99.62	0.04	602.47	603.24

Location		Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
C BRG. PIER 4 EB	2BA	47+09.62	0.04	602.36	603.12
	2BB	47+19.62	0.04	602.25	602.98
	2BC	47+29.62	0.04	602.14	602.84
	2BD	47+39.62	0.04	602.02	602.69
	2BE	47+49.62	0.04	601.90	602.52
	2BF	47+59.62	0.04	601.77	602.35
	2BG	47+69.62	0.04	601.64	602.17
	2BH	47+79.62	0.04	601.51	601.98
	2BI	47+89.62	0.04	601.37	601.78
	2BJ	47+99.62	0.04	601.23	601.58
	2BK	48+09.62	0.04	601.08	601.38
	2BL	48+19.62	0.04	600.93	601.17
	2BM	48+29.62	0.04	600.78	600.97
	2BN	48+39.62	0.04	600.62	600.76
	2BO	48+49.62	0.04	600.46	600.56
	2BP	48+59.62	0.04	600.30	600.37
	2BQ	48+69.62	0.04	600.13	600.17
	2BR	48+83.62	0.04	599.88	599.90
	2BS	48+93.62	0.04	599.70	599.72
	2BT	49+03.62	0.04	599.52	599.54
	2BU	49+13.62	0.04	599.33	599.37
	2BV	49+23.62	0.04	599.14	599.20
	2BW	49+33.62	0.04	598.95	599.03
	2BX	49+43.62	0.04	598.75	598.86
	2BY	49+53.62	0.04	598.54	598.70
	2BZ	49+63.62	0.04	598.34	598.54
	2CA	49+73.62	0.04	598.13	598.37
	2CB	49+83.62	0.04	597.91	598.20
	2CB	49+93.62	0.04	597.69	598.03
	2CC	50+03.62	0.04	597.47	597.85
	2CD	50+13.62	0.04	597.24	597.66
	2CE	50+23.62	0.04	597.01	597.46
2CF	50+33.62	0.04	596.78	597.25	
2CG	50+43.62	0.04	596.54	597.02	
2CH	50+53.62	0.04	596.29	596.79	
2CI	50+63.62	0.04	596.05	596.55	
2CJ	50+73.62	0.04	595.79	596.30	
2CK	50+83.62	0.04	595.54	596.03	
2CL	50+93.62	0.04	595.28	595.75	
2CM	51+03.62	0.04	595.02	595.46	
2CN	51+13.62	0.04	594.75	595.16	
2CO	51+23.62	0.04	594.48	594.85	
2CP	51+33.62	0.04	594.20	594.53	
2CQ	51+43.62	0.04	593.92	594.19	
2CR	51+53.62	0.04	593.64	593.85	
2CS	51+63.62	0.04	593.35	593.51	
2CT	51+73.62	0.04	593.06	593.15	
C W BRG PIER 5 EB	51+83.62	0.04	592.77	592.79	
C PIER 5 EB	51+85.12	0.04	592.72	592.74	

GIRDER E3				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
C PIER 2 EB	41+68.45	9.63	602.52	602.54
	C E BRG PIER 2 EB	41+69.62	9.63	602.53
2A	41+79.62	9.63	602.64	602.72
2B	41+89.62	9.63	602.74	602.89
2C	41+99.62	9.63	602.84	603.05
2D	42+09.62	9.63	602.93	603.20
2E	42+19.62	9.63	603.02	603.34
2F	42+29.62	9.63	603.11	603.48
2G	42+39.62	9.63	603.19	603.60
2H	42+49.62	9.63	603.27	603.71
2I	42+59.62	9.63	603.34	603.81
2J	42+69.62	9.63	603.41	603.90
2K	42+79.62	9.63	603.48	603.98
2L	42+89.62	9.63	603.54	604.04
2M	42+99.62	9.63	603.60	604.10
2N	43+09.62	9.63	603.65	604.14
2O	43+19.62	9.63	603.71	604.17
2P	43+29.62	9.63	603.75	604.20
2Q	43+39.62	9.63	603.79	604.21
2R	43+49.62	9.63	603.83	604.21
2S	43+59.62	9.63	603.87	604.20
2T	43+69.62	9.63	603.90	604.19
2U	43+79.62	9.63	603.92	604.17
2V	43+89.62	9.63	603.95	604.15
2W	43+99.62	9.63	603.96	604.12
2X	44+09.62	9.63	603.98	604.09
2Y	44+19.62	9.63	603.99	604.07
2Z	44+29.62	9.63	604.00	604.05
2AA	44+39.62	9.63	604.00	604.03
2AB	44+49.62	9.63	604.00	604.02
2AC	44+59.62	9.63	603.99	604.01
C BRG. PIER 3 EB	44+69.62	9.63	603.98	604.00
2AD	44+79.62	9.63	603.97	604.00
2AE	44+89.62	9.63	603.95	604.01
2AF	44+99.62	9.63	603.93	604.02
2AG	45+09.62	9.63	603.90	604.03
2AH	45+19.62	9.63	603.87	604.04
2AI	45+29.62	9.63	603.84	604.05
2AJ	45+39.62	9.63	603.80	604.07
2AK	45+49.62	9.63	603.76	604.09
2AL	45+59.62	9.63	603.72	604.10
2AM	45+69.62	9.63	603.67	604.11
2AN	45+79.62	9.63	603.61	604.11
2AO	45+89.62	9.63	603.55	604.11
2AP	45+99.62	9.63	603.49	604.10
2AQ	46+09.62	9.63	603.43	604.08
2AR	46+19.62	9.63	603.36	604.05
2AS	46+29.62	9.63	603.28	604.01
2AT	46+39.62	9.63	603.21	603.96
2AU	46+49.62	9.63	603.13	603.90
2AV	46+59.62	9.63	603.04	603.82
2AW	46+69.62	9.63	602.95	603.74
2AX	46+79.62	9.63	602.86	603.65
2AY	46+89.62	9.63	602.76	603.55
2AZ	46+99.62	9.63	602.66	603.44

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

 WSP USA, Inc. 30 N. LA SALLE STREET SUITE 4200 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 3 - UNIT 2 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 100,000 ' / in.	CHECKED - PJL	REVISED -			I-80	FAI 80 21 STRUCTURE 2	WILL	1230	639
	PLOT DATE = 11/5/2025	DRAWN - GM	REVISED -			CONTRACT NO. 62R23				
	PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -			SHEET 5-58 OF 5-333 SHEETS				
						ILLINOIS		FED. AID PROJECT		

WSP | WSP USA Inc.
30 N. LASALLE STREET
SUITE 4200
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

TOP OF SLAB ELEVATIONS 4 - UNIT 2 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

LAB ELEVATIONS 4 - UNIT 2 EB		F.A.I R.T.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
NUMBER 099-8309 WB AND 099-8325 EB		I-80	FAI 80 21 STRUCTURE 2	WILL	1230	640
SHEET 5-59 OF 5-333 SHEETS		CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT			

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\proj\trans\systems-pw\hntbwy.com\trans\corp\pw\hntbwy.com\trans\documents\projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5272-DEE207.dgn

GIRDER E4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 EB	41+68.45	19.21	602.67	602.69
☐ E BRG PIER 2 EB	41+69.62	19.21	602.68	602.71
2A	41+79.62	19.21	602.79	602.88
2B	41+89.62	19.21	602.89	603.04
2C	41+99.62	19.21	602.99	603.20
2D	42+09.62	19.21	603.09	603.36
2E	42+19.62	19.21	603.18	603.50
2F	42+29.62	19.21	603.26	603.63
2G	42+39.62	19.21	603.35	603.75
2H	42+49.62	19.21	603.42	603.87
2I	42+59.62	19.21	603.50	603.97
2J	42+69.62	19.21	603.57	604.06
2K	42+79.62	19.21	603.64	604.13
2L	42+89.62	19.21	603.70	604.20
2M	42+99.62	19.21	603.76	604.25
2N	43+09.62	19.21	603.81	604.30
2O	43+19.62	19.21	603.86	604.33
2P	43+29.62	19.21	603.91	604.35
2Q	43+39.62	19.21	603.95	604.36
2R	43+49.62	19.21	603.99	604.37
2S	43+59.62	19.21	604.02	604.36
2T	43+69.62	19.21	604.05	604.34
2U	43+79.62	19.21	604.08	604.32
2V	43+89.62	19.21	604.10	604.30
2W	43+99.62	19.21	604.12	604.28
2X	44+09.62	19.21	604.13	604.25
2Y	44+19.62	19.21	604.14	604.23
2Z	44+29.62	19.21	604.15	604.21
2AA	44+39.62	19.21	604.15	604.19
2AB	44+49.62	19.21	604.15	604.18
2AC	44+59.62	19.21	604.15	604.17
☐ BRG. PIER 3 EB	44+69.62	19.21	604.14	604.16
2AD	44+79.62	19.21	604.12	604.16
2AE	44+89.62	19.21	604.11	604.16
2AF	44+99.62	19.21	604.08	604.17
2AG	45+09.62	19.21	604.06	604.18
2AH	45+19.62	19.21	604.03	604.19
2AI	45+29.62	19.21	604.00	604.21
2AJ	45+39.62	19.21	603.96	604.23
2AK	45+49.62	19.21	603.92	604.24
2AL	45+59.62	19.21	603.87	604.26
2AM	45+69.62	19.21	603.82	604.27
2AN	45+79.62	19.21	603.77	604.27
2AO	45+89.62	19.21	603.71	604.27
2AP	45+99.62	19.21	603.65	604.25
2AQ	46+09.62	19.21	603.58	604.23
2AR	46+19.62	19.21	603.51	604.20
2AS	46+29.62	19.21	603.44	604.16
2AT	46+39.62	19.21	603.36	604.11
2AU	46+49.62	19.21	603.28	604.05
2AV	46+59.62	19.21	603.20	603.98
2AW	46+69.62	19.21	603.11	603.90
2AX	46+79.62	19.21	603.01	603.81
2AY	46+89.62	19.21	602.91	603.70
2AZ	46+99.62	19.21	602.81	603.59

GIRDER E4 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
2BA	47+09.62	19.21	602.71	603.47
2BB	47+19.62	19.21	602.60	603.33
2BC	47+29.62	19.21	602.48	603.19
2BD	47+39.62	19.21	602.37	603.03
2BE	47+49.62	19.21	602.25	602.87
2BF	47+59.62	19.21	602.12	602.69
2BG	47+69.62	19.21	601.99	602.51
2BH	47+79.62	19.21	601.86	602.32
2BI	47+89.62	19.21	601.72	602.13
2BJ	47+99.62	19.21	601.58	601.93
2BK	48+09.62	19.21	601.43	601.72
2BL	48+19.62	19.21	601.28	601.52
2BM	48+29.62	19.21	601.13	601.31
2BN	48+39.62	19.21	600.97	601.11
2BO	48+49.62	19.21	600.81	600.91
2BP	48+59.62	19.21	600.64	600.71
2BQ	48+69.62	19.21	600.47	600.52
☐ BRG. PIER 4 EB	48+83.62	19.21	600.23	600.25
2BR	48+93.62	19.21	600.05	600.07
2BS	49+03.62	19.21	599.87	599.89
2BT	49+13.62	19.21	599.68	599.72
2BU	49+23.62	19.21	599.49	599.54
2BV	49+33.62	19.21	599.29	599.38
2BW	49+43.62	19.21	599.10	599.21
2BX	49+53.62	19.21	598.89	599.05
2BY	49+63.62	19.21	598.68	598.89
2BZ	49+73.62	19.21	598.47	598.72
2CA	49+83.62	19.21	598.26	598.55
2CB	49+93.62	19.21	598.04	598.38
2CC	50+03.62	19.21	597.82	598.19
2CD	50+13.62	19.21	597.59	598.00
2CE	50+23.62	19.21	597.36	597.80
2CF	50+33.62	19.21	597.12	597.59
2CG	50+43.62	19.21	596.88	597.37
2CH	50+53.62	19.21	596.64	597.14
2CI	50+63.62	19.21	596.39	596.90
2CJ	50+73.62	19.21	596.14	596.64
2CK	50+83.62	19.21	595.89	596.38
2CL	50+93.62	19.21	595.63	596.10
2CM	51+03.62	19.21	595.36	595.81
2CN	51+13.62	19.21	595.10	595.51
2CO	51+23.62	19.21	594.83	595.20
2CP	51+33.62	19.21	594.55	594.87
2CQ	51+43.62	19.21	594.27	594.54
2CR	51+53.62	19.21	593.99	594.20
2CS	51+63.62	19.21	593.70	593.85
2CT	51+73.62	19.21	593.41	593.50
☐ W BRG PIER 5 EB	51+83.62	19.21	593.12	593.14
☐ PIER 5 EB	51+85.12	19.21	593.07	593.09

CROWN - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☐ PIER 2 EB	41+68.45	24.00	602.74	602.76
☐ E BRG PIER 2 EB	41+69.62	24.00	602.76	602.78
2A	41+79.62	24.00	602.86	602.95
2B	41+89.62	24.00	602.97	603.12
2C	41+99.62	24.00	603.06	603.28
2D	42+09.62	24.00	603.16	603.43
2E	42+19.62	24.00	603.25	603.57
2F	42+29.62	24.00	603.33	603.70
2G	42+39.62	24.00	603.42	603.83
2H	42+49.62	24.00	603.50	603.94
2I	42+59.62	24.00	603.57	604.04
2J	42+69.62	24.00	603.64	604.13
2K	42+79.62	24.00	603.71	604.21
2L	42+89.62	24.00	603.77	604.27
2M	42+99.62	24.00	603.83	604.33
2N	43+09.62	24.00	603.88	604.37
2O	43+19.62	24.00	603.93	604.40
2P	43+29.62	24.00	603.98	604.42
2Q	43+39.62	24.00	604.02	604.43
2R	43+49.62	24.00	604.06	604.44
2S	43+59.62	24.00	604.09	604.43
2T	43+69.62	24.00	604.12	604.42
2U	43+79.62	24.00	604.15	604.40
2V	43+89.62	24.00	604.17	604.37
2W	43+99.62	24.00	604.19	604.35
2X	44+09.62	24.00	604.21	604.32
2Y	44+19.62	24.00	604.22	604.30
2Z	44+29.62	24.00	604.22	604.28
2AA	44+39.62	24.00	604.23	604.26
2AB	44+49.62	24.00	604.22	604.25
2AC	44+59.62	24.00	604.22	604.24
☐ BRG. PIER 3 EB	44+69.62	24.00	604.21	604.23
2AD	44+79.62	24.00	604.20	604.23
2AE	44+89.62	24.00	604.18	604.24
2AF	44+99.62	24.00	604.16	604.24
2AG	45+09.62	24.00	604.13	604.25
2AH	45+19.62	24.00	604.10	604.27
2AI	45+29.62	24.00	604.07	604.28
2AJ	45+39.62	24.00	604.03	604.30
2AK	45+49.62	24.00	603.99	604.32
2AL	45+59.62	24.00	603.94	604.33
2AM	45+69.62	24.00	603.89	604.34
2AN	45+79.62	24.00	603.84	604.34
2AO	45+89.62	24.00	603.78	604.34
2AP	45+99.62	24.00	603.72	604.33
2AQ	46+09.62	24.00	603.65	604.31
2AR	46+19.62	24.00	603.59	604.27
2AS	46+29.62	24.00	603.51	604.23
2AT	46+39.62	24.00	603.43	604.18
2AU	46+49.62	24.00	603.35	604.12
2AV	46+59.62	24.00	603.27	604.05
2AW	46+69.62	24.00	603.18	603.97
2AX	46+79.62	24.00	603.08	603.88
2AY	46+89.62	24.00	602.99	603.78
2AZ	46+99.62	24.00	602.88	603.66

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 100,000 ' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 5 - UNIT 2 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-60 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	641
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

Model Default: p:\projects\trans\trans\corporate\ppl\hatched\Documents\Projects_2018\C4401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5233-DEE208.dgn
FILE NAME: p:\projects\trans\trans\corporate\ppl\hatched\Documents\Projects_2018\C4401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5233-DEE208.dgn

CROWN - EB (CONT.)				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
E BRG. PIER 4 EB	2BA	47+09.62	24.00	602.78
	2BB	47+19.62	24.00	602.67
	2BC	47+29.62	24.00	602.56
	2BD	47+39.62	24.00	602.44
	2BE	47+49.62	24.00	602.32
	2BF	47+59.62	24.00	602.19
	2BG	47+69.62	24.00	602.06
	2BH	47+79.62	24.00	601.93
	2BI	47+89.62	24.00	601.79
	2BJ	47+99.62	24.00	601.65
	2BK	48+09.62	24.00	601.50
	2BL	48+19.62	24.00	601.35
	2BM	48+29.62	24.00	601.20
	2BN	48+39.62	24.00	601.04
	2BO	48+49.62	24.00	600.88
	2BP	48+59.62	24.00	600.72
	2BQ	48+69.62	24.00	600.55
	2BR	48+83.62	24.00	600.30
	2BR	48+93.62	24.00	600.12
	2BS	49+03.62	24.00	599.94
	2BT	49+13.62	24.00	599.75
	2BU	49+23.62	24.00	599.56
	2BV	49+33.62	24.00	599.37
	2BW	49+43.62	24.00	599.17
	2BX	49+53.62	24.00	598.96
	2BY	49+63.62	24.00	598.76
	2BZ	49+73.62	24.00	598.55
	2CA	49+83.62	24.00	598.33
	2CB	49+93.62	24.00	598.11
	2CC	50+03.62	24.00	597.89
	2CD	50+13.62	24.00	597.66
	2CE	50+23.62	24.00	597.43
	2CF	50+33.62	24.00	597.19
	2CG	50+43.62	24.00	596.96
	2CH	50+53.62	24.00	596.71
	2CI	50+63.62	24.00	596.47
	2CJ	50+73.62	24.00	596.21
	2CK	50+83.62	24.00	595.96
	2CL	50+93.62	24.00	595.70
	2CM	51+03.62	24.00	595.44
	2CN	51+13.62	24.00	595.17
	2CO	51+23.62	24.00	594.90
	2CP	51+33.62	24.00	594.62
	2CQ	51+43.62	24.00	594.34
	2CR	51+53.62	24.00	594.06
	2CS	51+63.62	24.00	593.77
	2CT	51+73.62	24.00	593.48
W BRG PIER 5 EB	5 EB	51+83.62	24.00	593.19
	PIER 5 EB	51+85.12	24.00	593.14

GIRDER E5				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
E BRG PIER 2 EB	41+68.45	28.79	602.67	602.69
	41+69.62	28.79	602.68	602.71
	2A	41+79.62	28.79	602.79
	2B	41+89.62	28.79	602.89
	2C	41+99.62	28.79	602.99
	2D	42+09.62	28.79	603.09
	2E	42+19.62	28.79	603.18
	2F	42+29.62	28.79	603.26
	2G	42+39.62	28.79	603.35
	2H	42+49.62	28.79	603.42
	2I	42+59.62	28.79	603.50
	2J	42+69.62	28.79	603.57
	2K	42+79.62	28.79	603.64
	2L	42+89.62	28.79	603.70
	2M	42+99.62	28.79	603.76
	2N	43+09.62	28.79	603.81
	2O	43+19.62	28.79	603.86
	2P	43+29.62	28.79	603.91
	2Q	43+39.62	28.79	603.95
	2R	43+49.62	28.79	603.99
	2S	43+59.62	28.79	604.02
	2T	43+69.62	28.79	604.05
	2U	43+79.62	28.79	604.08
	2V	43+89.62	28.79	604.10
	2W	43+99.62	28.79	604.12
	2X	44+09.62	28.79	604.13
	2Y	44+19.62	28.79	604.14
	2Z	44+29.62	28.79	604.15
	2AA	44+39.62	28.79	604.15
	2AB	44+49.62	28.79	604.15
	2AC	44+59.62	28.79	604.15
BRG. PIER 3 EB	44+69.62	28.79	604.14	604.16
	2AD	44+79.62	28.79	604.12
	2AE	44+89.62	28.79	604.11
	2AF	44+99.62	28.79	604.08
	2AG	45+09.62	28.79	604.06
	2AH	45+19.62	28.79	604.03
	2AI	45+29.62	28.79	604.00
	2AJ	45+39.62	28.79	603.96
	2AK	45+49.62	28.79	603.92
	2AL	45+59.62	28.79	603.87
	2AM	45+69.62	28.79	603.82
	2AN	45+79.62	28.79	603.77
	2AO	45+89.62	28.79	603.71
	2AP	45+99.62	28.79	603.65
	2AQ	46+09.62	28.79	603.58
	2AR	46+19.62	28.79	603.51
	2AS	46+29.62	28.79	603.44
	2AT	46+39.62	28.79	603.36
	2AU	46+49.62	28.79	603.28
	2AV	46+59.62	28.79	603.20
2AW	46+69.62	28.79	603.11	603.90
	2AX	46+79.62	28.79	603.01
	2AY	46+89.62	28.79	602.91
	2AZ	46+99.62	28.79	602.81

GIRDER E5 (CONT.)				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
BRG. PIER 4 EB	2BA	47+09.62	28.79	602.71
	2BB	47+19.62	28.79	602.60
	2BC	47+29.62	28.79	602.48
	2BD	47+39.62	28.79	602.37
	2BE	47+49.62	28.79	602.25
	2BF	47+59.62	28.79	602.12
	2BG	47+69.62	28.79	601.99
	2BH	47+79.62	28.79	601.86
	2BI	47+89.62	28.79	601.72
	2BJ	47+99.62	28.79	601.58
	2BK	48+09.62	28.79	601.43
	2BL	48+19.62	28.79	601.28
	2BM	48+29.62	28.79	601.13
	2BN	48+39.62	28.79	600.97
	2BO	48+49.62	28.79	600.81
	2BP	48+59.62	28.79	600.64
	2BQ	48+69.62	28.79	600.47
	48+83.62	28.79	600.23	600.25
	2BR	48+93.62	28.79	600.05
	2BS	49+03.62	28.79	599.87
	2BT	49+13.62	28.79	599.68
	2BU	49+23.62	28.79	599.49
	2BV	49+33.62	28.79	599.29
	2BW	49+43.62	28.79	599.10
	2BX	49+53.62	28.79	598.89
	2BY	49+63.62	28.79	598.68
	2BZ	49+73.62	28.79	598.47
	2CA	49+83.62	28.79	598.26
	2CB	49+93.62	28.79	598.04
	2CC	50+03.62	28.79	597.82
	2CD	50+13.62	28.79	597.59
	2CE	50+23.62	28.79	597.36
	2CF	50+33.62	28.79	597.12
	2CG	50+43.62	28.79	596.88
	2CH	50+53.62	28.79	596.64
	2CI	50+63.62	28.79	596.39
	2CJ	50+73.62	28.79	596.14
	2CK	50+83.62	28.79	595.89
	2CL	50+93.62	28.79	595.63
	2CM	51+03.62	28.79	595.36
	2CN	51+13.62	28.79	595.10
	2CO	51+23.62	28.79	594.83
	2CP	51+33.62	28.79	594.55
	2CQ	51+43.62	28.79	594.27
	2CR	51+53.62	28.79	593.99
	2CS	51+63.62	28.79	593.70
	2CT	51+73.62	28.79	593.41
W BRG PIER 5 EB	5 EB	51+83.62	28.79	593.12
	PIER 5 EB	51+85.12	28.79	593.07

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

WSP | WSP USA Inc.
30 N. LASALLE STREET
SUITE 4200
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

F.A.I RTE	SECTION	COUR
--------------	---------	------

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	643
		CONTRACT NO. 62R23		
ILLINOIS		FED. AID PROJECT		

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

Model: Default
File Name: p:\projects\trans\trans\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-42R23-5235-DEE210.dgn

GIRDER E6 (CONT.)					
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
E BRG. PIER 4 EB	2BA	47+09.62	38.38	602.55	603.31
	2BB	47+19.62	38.38	602.44	603.18
	2BC	47+29.62	38.38	602.33	603.03
	2BD	47+39.62	38.38	602.21	602.88
	2BE	47+49.62	38.38	602.09	602.71
	2BF	47+59.62	38.38	601.96	602.54
	2BG	47+69.62	38.38	601.83	602.36
	2BH	47+79.62	38.38	601.70	602.17
	2BI	47+89.62	38.38	601.56	601.97
	2BJ	47+99.62	38.38	601.42	601.77
	2BK	48+09.62	38.38	601.28	601.57
	2BL	48+19.62	38.38	601.13	601.36
	2BM	48+29.62	38.38	600.97	601.16
	2BN	48+39.62	38.38	600.82	600.95
	2BO	48+49.62	38.38	600.65	600.75
	2BP	48+59.62	38.38	600.49	600.56
	2BQ	48+69.62	38.38	600.32	600.36
	2BR	48+83.62	38.38	600.07	600.10
	2BS	49+03.62	38.38	599.90	599.91
	2BT	49+13.62	38.38	599.71	599.74
	2BT	49+13.62	38.38	599.53	599.56
	2BU	49+23.62	38.38	599.33	599.39
	2BV	49+33.62	38.38	599.14	599.22
	2BW	49+43.62	38.38	598.94	599.06
	2BX	49+53.62	38.38	598.74	598.89
	2BY	49+63.62	38.38	598.53	598.73
	2BZ	49+73.62	38.38	598.32	598.56
	2CA	49+83.62	38.38	598.10	598.40
	2CB	49+93.62	38.38	597.88	598.22
	2CC	50+03.62	38.38	597.66	598.04
	2CD	50+13.62	38.38	597.43	597.85
	2CE	50+23.62	38.38	597.20	597.65
	2CF	50+33.62	38.38	596.97	597.44
	2CG	50+43.62	38.38	596.73	597.22
	2CH	50+53.62	38.38	596.48	596.99
	2CI	50+63.62	38.38	596.24	596.74
	2CJ	50+73.62	38.38	595.99	596.49
	2CK	50+83.62	38.38	595.73	596.22
	2CL	50+93.62	38.38	595.47	595.94
	2CM	51+03.62	38.38	595.21	595.65
	2CN	51+13.62	38.38	594.94	595.35
	2CO	51+23.62	38.38	594.67	595.04
	2CP	51+33.62	38.38	594.40	594.72
	2CQ	51+43.62	38.38	594.12	594.39
	2CR	51+53.62	38.38	593.83	594.05
	2CS	51+63.62	38.38	593.55	593.70
	2CT	51+73.62	38.38	593.25	593.34
W BRG PIER 5 EB	5 EB	51+83.62	38.38	592.96	592.98
	PIER 5 EB	51+85.12	38.38	592.92	592.94

GIRDER E7					
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
E BRG. PIER 3 EB	PIER 2 EB	41+68.45	47.96	602.32	602.35
	E BRG PIER 2 EB	41+69.62	47.96	602.34	602.36
	2A	41+79.62	47.96	602.44	602.53
	2B	41+89.62	47.96	602.55	602.70
	2C	41+99.62	47.96	602.64	602.86
	2D	42+09.62	47.96	602.74	603.01
	2E	42+19.62	47.96	602.83	603.15
	2F	42+29.62	47.96	602.92	603.28
	2G	42+39.62	47.96	603.00	603.41
	2H	42+49.62	47.96	603.08	603.52
	2I	42+59.62	47.96	603.15	603.62
	2J	42+69.62	47.96	603.22	603.71
	2K	42+79.62	47.96	603.29	603.79
	2L	42+89.62	47.96	603.35	603.85
	2M	42+99.62	47.96	603.41	603.91
	2N	43+09.62	47.96	603.46	603.95
	2O	43+19.62	47.96	603.51	603.98
	2P	43+29.62	47.96	603.56	604.00
	2Q	43+39.62	47.96	603.60	604.02
	2R	43+49.62	47.96	603.64	604.02
	2S	43+59.62	47.96	603.68	604.01
	2T	43+69.62	47.96	603.71	604.00
	2U	43+79.62	47.96	603.73	603.98
	2V	43+89.62	47.96	603.75	603.95
	2W	43+99.62	47.96	603.77	603.93
	2X	44+09.62	47.96	603.79	603.90
	2Y	44+19.62	47.96	603.80	603.88
	2Z	44+29.62	47.96	603.80	603.86
	2AA	44+39.62	47.96	603.81	603.84
	2AB	44+49.62	47.96	603.80	603.83
	2AC	44+59.62	47.96	603.80	603.82
	2AD	44+69.62	47.96	603.79	603.81
	2AE	44+79.62	47.96	603.78	603.81
	2AF	44+89.62	47.96	603.76	603.82
	2AG	44+99.62	47.96	603.74	603.82
	2AH	45+09.62	47.96	603.71	603.83
	2AI	45+19.62	47.96	603.68	603.85
	2AJ	45+29.62	47.96	603.65	603.86
	2AK	45+39.62	47.96	603.61	603.88
	2AL	45+49.62	47.96	603.57	603.90
	2AM	45+59.62	47.96	603.52	603.91
	2AN	45+69.62	47.96	603.47	603.92
	2AO	45+79.62	47.96	603.42	603.92
	2AP	45+89.62	47.96	603.36	603.92
	2AQ	45+99.62	47.96	603.30	603.91
	2AR	46+09.62	47.96	603.24	603.89
	2AS	46+19.62	47.96	603.17	603.85
	2AT	46+29.62	47.96	603.09	603.81
	2AU	46+39.62	47.96	603.02	603.77
	2AV	46+49.62	47.96	602.93	603.70
	2AW	46+59.62	47.96	602.85	603.63
	2AX	46+69.62	47.96	602.76	603.55
	2AY	46+79.62	47.96	602.66	603.46
	2AZ	46+89.62	47.96	602.57	603.36
	2AZ	46+99.62	47.96	602.47	603.24

GIRDER E7 (CONT.)					
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
W BRG PIER 5 EB	2BA	47+09.62	47.96	602.36	603.12
	2BB	47+19.62	47.96	602.25	602.98
	2BC	47+29.62	47.96	602.14	602.84
	2BD	47+39.62	47.96	602.02	602.69
	2BE	47+49.62	47.96	601.90	602.52
	2BF	47+59.62	47.96	601.77	602.35
	2BG	47+69.62	47.96	601.64	602.17
	2BH	47+79.62	47.96	601.51	601.98
	2BI	47+89.62	47.96	601.37	601.78
	2BJ	47+99.62	47.96	601.23	601.58
	2BK	48+09.62	47.96	601.08	601.38
	2BL	48+19.62	47.96	600.93	601.17
	2BM	48+29.62	47.96	600.78	600.97
	2BN	48+39.62	47.96	600.62	600.76
	2BO	48+49.62	47.96	600.46	600.56
	2BP	48+59.62	47.96	600.30	600.37
	2BQ	48+69.62	47.96	600.13	600.17
	2BR	48+83.62	47.96	599.88	599.90
	2BS	49+03.62	47.96	599.70	599.72
	2BT	49+13.62	47.96	599.52	599.54
	2BT	49+13.62	47.96	599.33	599.37
	2BU	49+23.62	47.96	599.14	599.20
	2BV	49+33.62	47.96	598.95	599.03
	2BW	49+43.62	47.96	598.75	598.86
	2BX	49+53.62	47.96	598.54	598.70
	2BY	49+63.62	47.96	598.34	598.54
	2BZ	49+73.62	47.96	598.13	598.37
	2CA	49+83.62	47.96	597.91	598.20
	2CB	49+93.62	47.96	597.69	598.03
	2CC	50+03.62	47.96	597.47	597.85
	2CD	50+13.62	47.96	597.24	597.66
	2CE	50+23.62	47.96	597.01	597.46
	2CF	50+33.62	47.96	596.78	597.25
	2CG	50+43.62	47.96	596.54	597.02
	2CH	50+53.62	47.96	596.29	596.79
	2CI	50+63.62	47.96	596.05	596.55
	2CJ	50+73.62	47.96	595.79	596.30
	2CK	50+83.62	47.96	595.54	596.03
	2CL	50+93.62	47.96	595.28	595.75
	2CM	51+03.62	47.96	595.02	595.46
	2CN	51+13.62	47.96	594.75	595.16
	2CO	51+23.62	47.96	594.48	594.85
	2CP	51+33.62	47.96	594.20	594.53
	2CQ	51+43.62	47.96	593.92	594.19
	2CR	51+53.62	47.96	593.64	593.85
	2CS	51+63.62	47.96	593.35	593.51
	2CT	51+73.62	47.96	593.06	593.15
	W BRG PIER 5 EB	51+83.62	47.96	592.77	592.79
	PIER 5 EB	51+85.12	47.96	592.72	592.74

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL: Default
FILE NAME: pw:

GIRDER E8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☪ PIER 2 EB	41+68.45	57.54	602.13	602.15
☪ E BRG PIER 2 EB	41+69.62	57.54	602.15	602.17
2A	41+79.62	57.54	602.25	602.34
2B	41+89.62	57.54	602.35	602.50
2C	41+99.62	57.54	602.45	602.66
2D	42+09.62	57.54	602.55	602.82
2E	42+19.62	57.54	602.64	602.96
2F	42+29.62	57.54	602.72	603.09
2G	42+39.62	57.54	602.81	603.22
2H	42+49.62	57.54	602.88	603.33
2I	42+59.62	57.54	602.96	603.43
2J	42+69.62	57.54	603.03	603.52
2K	42+79.62	57.54	603.10	603.59
2L	42+89.62	57.54	603.16	603.66
2M	42+99.62	57.54	603.22	603.72
2N	43+09.62	57.54	603.27	603.76
2O	43+19.62	57.54	603.32	603.79
2P	43+29.62	57.54	603.37	603.81
2Q	43+39.62	57.54	603.41	603.82
2R	43+49.62	57.54	603.45	603.83
2S	43+59.62	57.54	603.48	603.82
2T	43+69.62	57.54	603.51	603.81
2U	43+79.62	57.54	603.54	603.79
2V	43+89.62	57.54	603.56	603.76
2W	43+99.62	57.54	603.58	603.74
2X	44+09.62	57.54	603.60	603.71
2Y	44+19.62	57.54	603.61	603.69
2Z	44+29.62	57.54	603.61	603.67
2AA	44+39.62	57.54	603.61	603.65
2AB	44+49.62	57.54	603.61	603.64
2AC	44+59.62	57.54	603.61	603.63
☪ BRG. PIER 3 EB	44+69.62	57.54	603.60	603.62
2AD	44+79.62	57.54	603.58	603.62
2AE	44+89.62	57.54	603.57	603.62
2AF	44+99.62	57.54	603.55	603.63
2AG	45+09.62	57.54	603.52	603.64
2AH	45+19.62	57.54	603.49	603.66
2AI	45+29.62	57.54	603.46	603.67
2AJ	45+39.62	57.54	603.42	603.69
2AK	45+49.62	57.54	603.38	603.70
2AL	45+59.62	57.54	603.33	603.72
2AM	45+69.62	57.54	603.28	603.73
2AN	45+79.62	57.54	603.23	603.73
2AO	45+89.62	57.54	603.17	603.73
2AP	45+99.62	57.54	603.11	603.71
2AQ	46+09.62	57.54	603.04	603.69
2AR	46+19.62	57.54	602.97	603.66
2AS	46+29.62	57.54	602.90	603.62
2AT	46+39.62	57.54	602.82	603.57
2AU	46+49.62	57.54	602.74	603.51
2AV	46+59.62	57.54	602.66	603.44
2AW	46+69.62	57.54	602.57	603.36
2AX	46+79.62	57.54	602.47	603.27
2AY	46+89.62	57.54	602.38	603.17
2AZ	46+99.62	57.54	602.27	603.05

GIRDER E8 (CONT.)

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding	
C BRG. PIER 4 EB	2BA	47+09.62	57.54	602.17	602.93
	2BB	47+19.62	57.54	602.06	602.79
	2BC	47+29.62	57.54	601.95	602.65
	2BD	47+39.62	57.54	601.83	602.49
	2BE	47+49.62	57.54	601.71	602.33
	2BF	47+59.62	57.54	601.58	602.16
	2BG	47+69.62	57.54	601.45	601.97
	2BH	47+79.62	57.54	601.32	601.78
	2BI	47+89.62	57.54	601.18	601.59
	2BJ	47+99.62	57.54	601.04	601.39
	2BK	48+09.62	57.54	600.89	601.18
	2BL	48+19.62	57.54	600.74	600.98
	2BM	48+29.62	57.54	600.59	600.77
	2BN	48+39.62	57.54	600.43	600.57
	2BO	48+49.62	57.54	600.27	600.37
	2BP	48+59.62	57.54	600.10	600.17
	2BQ	48+69.62	57.54	599.94	599.98
	2BR	48+83.62	57.54	599.69	599.71
	2BS	48+93.62	57.54	599.51	599.53
	2BT	49+03.62	57.54	599.33	599.35
	2BU	49+13.62	57.54	599.14	599.18
	2BV	49+23.62	57.54	598.95	599.01
	2BW	49+33.62	57.54	598.76	598.84
	2BX	49+43.62	57.54	598.56	598.67
	2BY	49+53.62	57.54	598.35	598.51
	2BZ	49+63.62	57.54	598.15	598.35
	2CA	49+73.62	57.54	597.93	598.18
	2CB	49+83.62	57.54	597.72	598.01
	2CB	49+93.62	57.54	597.50	597.84
	2CC	50+03.62	57.54	597.28	597.66
	2CD	50+13.62	57.54	597.05	597.46
	2CE	50+23.62	57.54	596.82	597.26
2CF	50+33.62	57.54	596.58	597.05	
2CG	50+43.62	57.54	596.34	596.83	
2CH	50+53.62	57.54	596.10	596.60	
2CI	50+63.62	57.54	595.85	596.36	
2CJ	50+73.62	57.54	595.60	596.10	
2CK	50+83.62	57.54	595.35	595.84	
2CL	50+93.62	57.54	595.09	595.56	
2CM	51+03.62	57.54	594.83	595.27	
2CN	51+13.62	57.54	594.56	594.97	
2CO	51+23.62	57.54	594.29	594.66	
2CP	51+33.62	57.54	594.01	594.33	
2CQ	51+43.62	57.54	593.73	594.00	
2CR	51+53.62	57.54	593.45	593.66	
2CS	51+63.62	57.54	593.16	593.31	
2CT	51+73.62	57.54	592.87	592.96	
C W BRG PIER 5 EB	51+83.62	57.54	592.58	592.60	
C PIER 5 EB	51+85.12	57.54	592.53	592.55	

INSIDE FACE OF SOUTH PARAPET - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection and Grinding
☪ PIER 2 EB	41+68.45	60.00	602.08	602.10
☪ E BRG PIER 2 EB	41+69.62	60.00	602.10	602.12
2A	41+79.62	60.00	602.20	602.29
2B	41+89.62	60.00	602.31	602.46
2C	41+99.62	60.00	602.40	602.62
2D	42+09.62	60.00	602.50	602.77
2E	42+19.62	60.00	602.59	602.91
2F	42+29.62	60.00	602.67	603.04
2G	42+39.62	60.00	602.76	603.17
2H	42+49.62	60.00	602.84	603.28
2I	42+59.62	60.00	602.91	603.38
2J	42+69.62	60.00	602.98	603.47
2K	42+79.62	60.00	603.05	603.55
2L	42+89.62	60.00	603.11	603.61
2M	42+99.62	60.00	603.17	603.67
2N	43+09.62	60.00	603.22	603.71
2O	43+19.62	60.00	603.27	603.74
2P	43+29.62	60.00	603.32	603.76
2Q	43+39.62	60.00	603.36	603.77
2R	43+49.62	60.00	603.40	603.78
2S	43+59.62	60.00	603.43	603.77
2T	43+69.62	60.00	603.46	603.76
2U	43+79.62	60.00	603.49	603.74
2V	43+89.62	60.00	603.51	603.71
2W	43+99.62	60.00	603.53	603.69
2X	44+09.62	60.00	603.55	603.66
2Y	44+19.62	60.00	603.56	603.64
2Z	44+29.62	60.00	603.56	603.62
2AA	44+39.62	60.00	603.57	603.60
2AB	44+49.62	60.00	603.56	603.59
2AC	44+59.62	60.00	603.56	603.58
☪ BRG. PIER 3 EB	44+69.62	60.00	603.55	603.57
2AD	44+79.62	60.00	603.54	603.57
2AE	44+89.62	60.00	603.52	603.58
2AF	44+99.62	60.00	603.50	603.58
2AG	45+09.62	60.00	603.47	603.59
2AH	45+19.62	60.00	603.44	603.61
2AI	45+29.62	60.00	603.41	603.62
2AJ	45+39.62	60.00	603.37	603.64
2AK	45+49.62	60.00	603.33	603.66
2AL	45+59.62	60.00	603.28	603.67
2AM	45+69.62	60.00	603.23	603.68
2AN	45+79.62	60.00	603.18	603.68
2AO	45+89.62	60.00	603.12	603.68
2AP	45+99.62	60.00	603.06	603.67
2AQ	46+09.62	60.00	602.99	603.65
2AR	46+19.62	60.00	602.93	603.61
2AS	46+29.62	60.00	602.85	603.57
2AT	46+39.62	60.00	602.77	603.52
2AU	46+49.62	60.00	602.69	603.46
2AV	46+59.62	60.00	602.61	603.39
2AW	46+69.62	60.00	602.52	603.31
2AX	46+79.62	60.00	602.42	603.22
2AY	46+89.62	60.00	602.33	603.12
2AZ	46+99.62	60.00	602.22	603.00

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

WSP WSP USA Inc. 30 N. LASKALLE STREET SUITE 4200 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 9 - UNIT 2 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 100,000 ' / in.	DRAWN - GM	REVISED -			I-80	FAI 80 21 STRUCTURE 2	WILL	1230	645
	PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -			CONTRACT NO. 62R23				
	SHEET 5-64 OF 5-333 SHEETS					ILLINOIS		FED. AID PROJECT		


MODEL: Default
FILE NAME: pw:/transystems-pw.bentley.com/transvscorp-pw1-hosted/Documents/Projects_2018/CH401/401180022/03-WSP/CAD/62R23-RB-1/Sheets/Structural/0998309-62R23-S237-DEE212.dgn

NOTES:


1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL: Default
FILE NAME: pw:/

MODEL Default:
FILE NAME: p:\projects\trans\scorp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62023-RB-1\Sheet\Structure\0998309-42R23-5238-05\V301.dgn

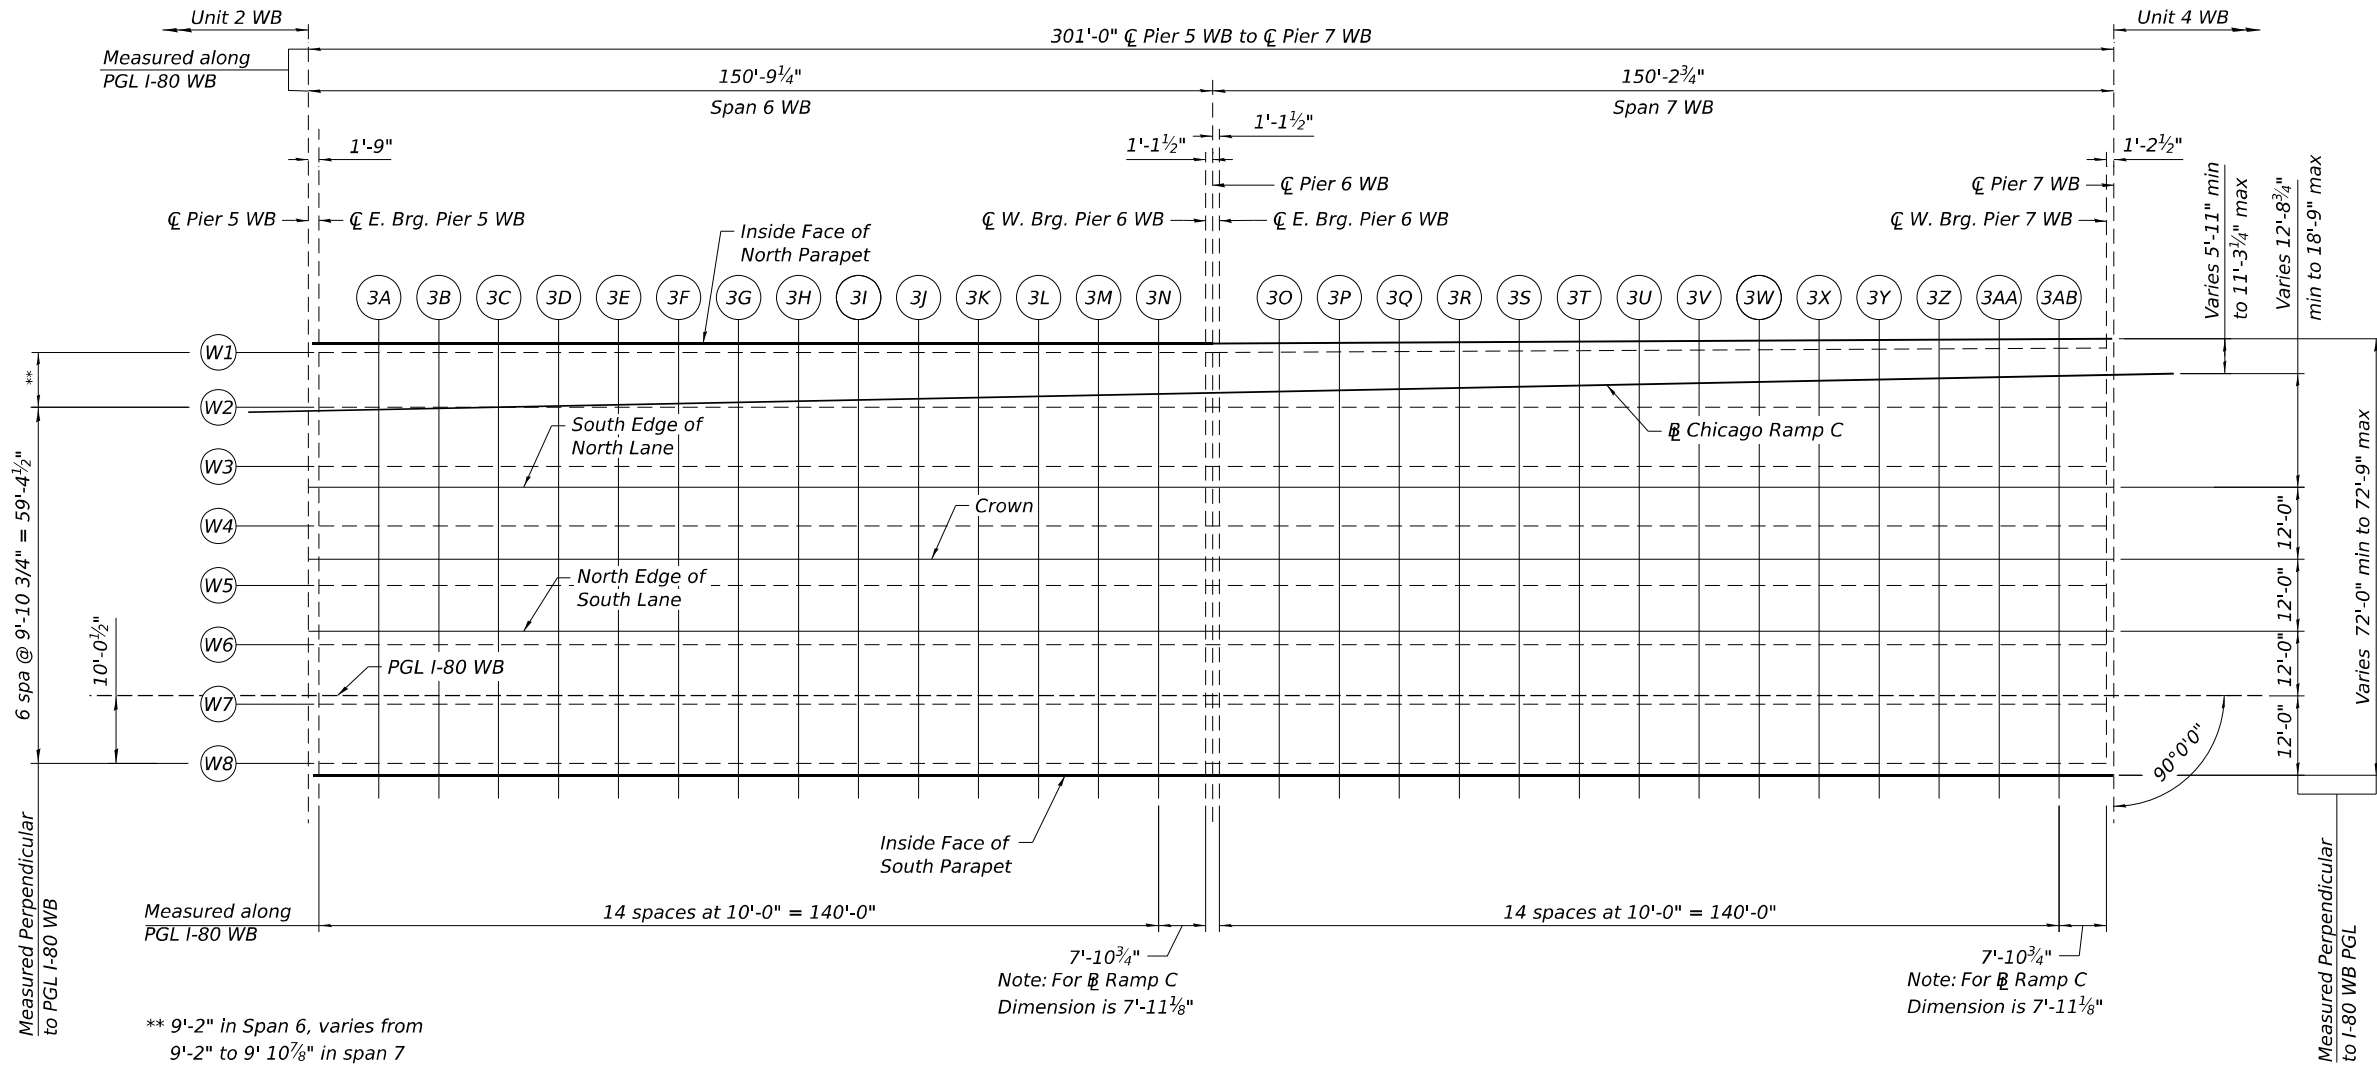

PLAN -UNIT 3 WB

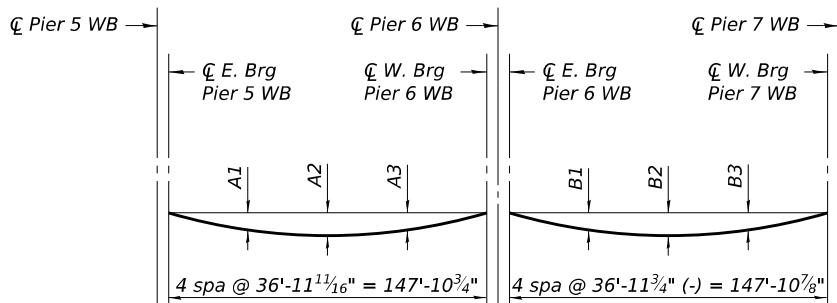


DEAD LOAD DEFLECTION DIAGRAM

(Includes weight of concrete, excluding beams)

Note:

The above deflections are not to be used in the field if the engineer is working from the grade elevations adjusted for dead load deflections and grinding as shown on sheets S-65 to S-71.

Girder	DEAD LOAD DEFLECTIONS (INCHES)					
	Span 6 WB			Span 7 WB		
	A1	A2	A3	B1	B2	B3
W1	2 $\frac{3}{8}$	3 $\frac{1}{4}$	2 $\frac{3}{8}$	2 $\frac{3}{8}$	3 $\frac{1}{4}$	2 $\frac{3}{8}$
W2	2 $\frac{1}{4}$	3 $\frac{1}{8}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	3 $\frac{1}{8}$	2 $\frac{3}{8}$
W3	2 $\frac{3}{8}$	3 $\frac{1}{4}$	2 $\frac{3}{8}$	2 $\frac{3}{8}$	3 $\frac{1}{4}$	2 $\frac{3}{8}$
W4	2 $\frac{1}{4}$	3	2 $\frac{1}{4}$	2 $\frac{1}{4}$	3	2 $\frac{1}{4}$
W5	2 $\frac{1}{4}$	3	2 $\frac{1}{4}$	2 $\frac{1}{4}$	3	2 $\frac{1}{4}$
W6	2 $\frac{3}{8}$	3 $\frac{1}{8}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	3 $\frac{1}{8}$	2 $\frac{1}{4}$
W7	2 $\frac{3}{8}$	3 $\frac{1}{8}$	2 $\frac{1}{4}$	2 $\frac{1}{4}$	3 $\frac{1}{8}$	2 $\frac{1}{4}$
W8	2 $\frac{1}{8}$	2 $\frac{7}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{7}{8}$	2 $\frac{1}{8}$



* Variable (not less $\frac{1}{2}$ ")

At Minimum Fillet

At Maximum Fillet

INTERIOR BEAMS

EXTERIOR BEAMS

FILLET HEIGHTS

To determine "t": After all precast prestressed beams have been erected, elevations of the top flanges of the beams shall be taken at intervals shown. These elevations subtracted from the "Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding" shown on sheets S-67 to S-71, minus the initial slab thickness prior to grinding, equals the fillet heights "t" above top flange of beams.

The slab is to be ground after curing to achieve smoothness, but the slab is not to be ground to elevations below the "Theoretical Grade Elevations" shown on sheets S-67 to S-71. For grinding the deck, see Special Provisions.

NOTES:

- Up to $\frac{1}{4}$ inch to be ground off the bridge deck and bridge approach slabs. The Profile Grade shows the final grade after grinding.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 32:0,0000 "x" / in.
PLOT DATE	= 11/5/2025

DESIGNED -	LAS
CHECKED -	PJL
DRAWN -	GM
CHECKED -	LAS

REVISED -	
REVISED -	
REVISED -	
REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION PLAN - UNIT 3 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-66 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	647
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\projects\trans\systems-pw\hntb\comtrans\corp-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1\Sheets\Structural\0998309-8325-5239-DEW\302.dgn

INSIDE FACE OF NORTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 WB	52+09.88	-60.00	591.73	591.75
☐ E BRG. PIER 5 WB	52+11.63	-60.00	591.68	591.70
3A	52+21.63	-60.00	591.37	591.46
3B	52+31.63	-60.00	591.07	591.21
3C	52+41.63	-60.00	590.76	590.96
3D	52+51.63	-60.00	590.45	590.69
3E	52+61.63	-60.00	590.15	590.41
3F	52+71.63	-60.00	589.84	590.12
3G	52+81.63	-60.00	589.53	589.82
3H	52+91.63	-60.00	589.23	589.51
3I	53+01.63	-60.00	588.92	589.19
3J	53+11.63	-60.00	588.61	588.86
3K	53+21.63	-60.00	588.31	588.53
3L	53+31.63	-60.00	588.00	588.18
3M	53+41.63	-60.00	587.69	587.82
3N	53+51.63	-60.00	587.39	587.46
☐ W BRG PIER 6 WB	53+59.53	-60.00	587.15	587.17
☐ PIER 6 WB	53+60.65	-60.00	587.11	587.13
☐ E BRG PIER 6 WB	53+61.78	-60.00	587.08	587.10
3O	53+71.77	-60.05	586.77	586.85
3P	53+81.77	-60.09	586.46	586.60
3Q	53+91.77	-60.14	586.15	586.34
3R	54+01.77	-60.18	585.85	586.07
3S	54+11.77	-60.23	585.54	585.79
3T	54+21.77	-60.27	585.23	585.51
3U	54+31.77	-60.32	584.92	585.21
3V	54+41.77	-60.36	584.62	584.90
3W	54+51.77	-60.40	584.31	584.59
3X	54+61.77	-60.45	584.00	584.26
3Y	54+71.77	-60.49	583.68	583.91
3Z	54+81.77	-60.54	583.36	583.55
3AA	54+91.77	-60.58	583.04	583.18
3AB	55+01.77	-60.63	582.72	582.79
☐ W. BRG. PIER 7 WB	55+09.67	-60.66	582.46	582.48
☐ PIER 7 WB	55+10.88	-60.67	582.41	582.43

BEAM W1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 WB	52+09.88	-58.50	591.76	591.78
☐ E BRG. PIER 5 WB	52+11.63	-58.50	591.71	591.73
3A	52+21.63	-58.50	591.40	591.49
3B	52+31.63	-58.50	591.10	591.24
3C	52+41.63	-58.50	590.79	590.99
3D	52+51.63	-58.50	590.48	590.72
3E	52+61.63	-58.50	590.18	590.44
3F	52+71.63	-58.50	589.87	590.15
3G	52+81.63	-58.50	589.56	589.85
3H	52+91.63	-58.50	589.26	589.54
3I	53+01.63	-58.50	588.95	589.22
3J	53+11.63	-58.50	588.64	588.89
3K	53+21.63	-58.50	588.34	588.56
3L	53+31.63	-58.50	588.03	588.21
3M	53+41.63	-58.50	587.72	587.85
3N	53+51.63	-58.50	587.42	587.49
☐ W BRG PIER 6 WB	53+59.53	-58.50	587.18	587.20
☐ PIER 6 WB	53+60.65	-58.50	587.14	587.16
☐ E BRG PIER 6 WB	53+61.78	-58.51	587.11	587.13
3O	53+71.77	-58.56	586.80	586.88
3P	53+81.77	-58.61	586.49	586.63
3Q	53+91.77	-58.66	586.18	586.37
3R	54+01.77	-58.71	585.88	586.10
3S	54+11.77	-58.76	585.57	585.82
3T	54+21.77	-58.81	585.26	585.54
3U	54+31.77	-58.86	584.95	585.24
3V	54+41.77	-58.91	584.65	584.93
3W	54+51.77	-58.96	584.34	584.62
3X	54+61.77	-59.01	584.03	584.29
3Y	54+71.77	-59.06	583.71	583.94
3Z	54+81.77	-59.11	583.39	583.58
3AA	54+91.77	-59.16	583.07	583.21
3AB	55+01.77	-59.21	582.75	582.82
☐ W. BRG. PIER 7 WB	55+09.67	-59.24	582.49	582.51
☐ PIER 7 WB	55+10.88	-59.25	582.44	582.46

PROP. ~~B~~ RAMP C

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 WB	52+09.88	-48.73	591.96	591.98
☐ E BRG. PIER 5 WB	52+11.63	-48.77	591.90	591.93
3A	52+21.63	-48.97	591.59	591.68
3B	52+31.63	-49.17	591.28	591.42
3C	52+41.62	-49.37	590.97	591.16
3D	52+51.62	-49.57	590.66	590.89
3E	52+61.62	-49.77	590.35	590.60
3F	52+71.62	-49.97	590.04	590.31
3G	52+81.62	-50.17	589.73	590.01
3H	52+91.61	-50.37	589.42	589.69
3I	53+01.61	-50.57	589.11	589.37
3J	53+11.61	-50.77	588.80	589.04
3K	53+21.61	-50.96	588.49	588.70
3L	53+31.61	-51.16	588.18	588.35
3M	53+41.60	-51.36	587.87	587.99
3N	53+51.60	-51.56	587.56	587.63
☐ W BRG PIER 6 WB	53+59.53	-51.72	587.31	587.33
☐ PIER 6 WB	53+60.65	-51.75	587.28	587.30
☐ E BRG PIER 6 WB	53+61.78	-51.77	587.24	587.26
3O	53+71.77	-51.97	586.93	587.01
3P	53+81.77	-52.17	586.62	586.75
3Q	53+91.77	-52.37	586.31	586.49
3R	54+01.77	-52.57	586.00	586.22
3S	54+11.77	-52.77	585.69	585.93
3T	54+21.76	-52.97	585.38	585.65
3U	54+31.76	-53.17	585.07	585.34
3V	54+41.76	-53.37	584.76	585.03
3W	54+51.76	-53.57	584.45	584.71
3X	54+61.76	-53.77	584.14	584.38
3Y	54+71.75	-53.97	583.82	584.03
3Z	54+81.75	-54.17	583.49	583.67
3AA	54+91.75	-54.37	583.17	583.30
3AB	55+01.75	-54.57	582.84	582.91
☐ W. BRG. PIER 7 WB	55+09.67	-54.73	582.58	582.60
☐ PIER 7 WB	55+10.88	-54.75	582.53	582.55

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 0.167 ' / in.
PLOT DATE	= 11/5/2025

DESIGNED	-	LAS
CHECKED	-	PJL
DRAWN	-	GM
CHECKED	-	LAS

REVISED	-
REVISED	-
REVISED	-
REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION 1 - UNIT 3 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-67 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	648
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

BEAM W2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☪ PIER 5 WB	52+09.88	-49.33	591.95	591.97
☪ E BRG. PIER 5 WB	52+11.63	-49.33	591.89	591.91
3A	52+21.63	-49.33	591.59	591.67
3B	52+31.63	-49.33	591.28	591.42
3C	52+41.63	-49.33	590.97	591.16
3D	52+51.63	-49.33	590.67	590.89
3E	52+61.63	-49.33	590.36	590.61
3F	52+71.63	-49.33	590.05	590.32
3G	52+81.63	-49.33	589.75	590.02
3H	52+91.63	-49.33	589.44	589.71
3I	53+01.63	-49.33	589.13	589.40
3J	53+11.63	-49.33	588.83	589.07
3K	53+21.63	-49.33	588.52	588.73
3L	53+31.63	-49.33	588.21	588.39
3M	53+41.63	-49.33	587.91	588.03
3N	53+51.63	-49.33	587.60	587.67
☪ W BRG PIER 6 WB	53+59.53	-49.33	587.36	587.38
☪ PIER 6 WB	53+60.65	-49.33	587.32	587.35
☪ E BRG PIER 6 WB	53+61.78	-49.33	587.29	587.31
3O	53+71.78	-49.33	586.98	587.06
3P	53+81.78	-49.33	586.68	586.81
3Q	53+91.78	-49.33	586.37	586.55
3R	54+01.78	-49.33	586.06	586.28
3S	54+11.78	-49.33	585.76	586.00
3T	54+21.78	-49.33	585.45	585.72
3U	54+31.78	-49.33	585.14	585.42
3V	54+41.78	-49.33	584.84	585.11
3W	54+51.78	-49.33	584.53	584.80
3X	54+61.78	-49.33	584.22	584.47
3Y	54+71.78	-49.33	583.91	584.12
3Z	54+81.78	-49.33	583.59	583.77
3AA	54+91.78	-49.33	583.27	583.40
3AB	55+01.78	-49.33	582.95	583.02
☪ W. BRG. PIER 7 WB	55+09.67	-49.33	582.69	582.71
☪ PIER 7 WB	55+10.88	-49.33	582.64	582.66

BEAM W3

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☪ PIER 5 WB	52+09.88	-39.44	592.14	592.17
☪ E BRG. PIER 5 WB	52+11.63	-39.44	592.09	592.11
	3A 52+21.63	-39.44	591.78	591.87
	3B 52+31.63	-39.44	591.48	591.62
	3C 52+41.63	-39.44	591.17	591.37
	3D 52+51.63	-39.44	590.86	591.10
	3E 52+61.63	-39.44	590.56	590.82
	3F 52+71.63	-39.44	590.25	590.53
	3G 52+81.63	-39.44	589.94	590.23
	3H 52+91.63	-39.44	589.64	589.92
	3I 53+01.63	-39.44	589.33	589.60
	3J 53+11.63	-39.44	589.03	589.28
	3K 53+21.63	-39.44	588.72	588.94
	3L 53+31.63	-39.44	588.41	588.59
	3M 53+41.63	-39.44	588.11	588.23
	3N 53+51.63	-39.44	587.80	587.87
☪ W BRG PIER 6 WB	53+59.53	-39.44	587.56	587.58
☪ PIER 6 WB	53+60.65	-39.44	587.52	587.54
☪ E BRG PIER 6 WB	53+61.78	-39.44	587.49	587.51
	3O 53+71.78	-39.44	587.18	587.26
	3P 53+81.78	-39.44	586.87	587.01
	3Q 53+91.78	-39.44	586.57	586.76
	3R 54+01.78	-39.44	586.26	586.49
	3S 54+11.78	-39.44	585.96	586.21
	3T 54+21.78	-39.44	585.65	585.93
	3U 54+31.78	-39.44	585.34	585.63
	3V 54+41.78	-39.44	585.04	585.32
	3W 54+51.78	-39.44	584.73	585.01
	3X 54+61.78	-39.44	584.42	584.68
	3Y 54+71.78	-39.44	584.11	584.33
	3Z 54+81.78	-39.44	583.79	583.97
	3AA 54+91.78	-39.44	583.47	583.60
	3AB 55+01.78	-39.44	583.15	583.22
☪ W. BRG. PIER 7 WB	55+09.67	-39.44	582.89	582.91
☪ PIER 7 WB	55+10.88	-39.44	582.84	582.86

SOUTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 WB	52+09.88	-36.00	592.21	592.23
☐ E BRG. PIER 5 WB	52+11.63	-36.00	592.16	592.18
3A	52+21.63	-36.00	591.85	591.94
3B	52+31.63	-36.00	591.55	591.69
3C	52+41.63	-36.00	591.24	591.44
3D	52+51.63	-36.00	590.93	591.17
3E	52+61.63	-36.00	590.63	590.89
3F	52+71.63	-36.00	590.32	590.60
3G	52+81.63	-36.00	590.01	590.30
3H	52+91.63	-36.00	589.71	589.99
3I	53+01.63	-36.00	589.40	589.67
3J	53+11.63	-36.00	589.09	589.34
3K	53+21.63	-36.00	588.79	589.01
3L	53+31.63	-36.00	588.48	588.66
3M	53+41.63	-36.00	588.17	588.30
3N	53+51.63	-36.00	587.87	587.94
☐ W BRG PIER 6 WB	53+59.53	-36.00	587.63	587.65
☐ PIER 6 WB	53+60.65	-36.00	587.59	587.61
☐ E BRG PIER 6 WB	53+61.78	-36.00	587.56	587.58
3O	53+71.78	-36.00	587.25	587.33
3P	53+81.78	-36.00	586.94	587.08
3Q	53+91.78	-36.00	586.64	586.83
3R	54+01.78	-36.00	586.33	586.56
3S	54+11.78	-36.00	586.02	586.28
3T	54+21.78	-36.00	585.72	585.99
3U	54+31.78	-36.00	585.41	585.70
3V	54+41.78	-36.00	585.10	585.39
3W	54+51.78	-36.00	584.80	585.07
3X	54+61.78	-36.00	584.49	584.75
3Y	54+71.78	-36.00	584.17	584.40
3Z	54+81.78	-36.00	583.85	584.04
3AA	54+91.78	-36.00	583.53	583.67
3AB	55+01.78	-36.00	583.21	583.29
☐ W. BRG. PIER 7 WB	55+09.67	-36.00	582.96	582.98
☐ PIER 7 WB	55+10.88	-36.00	582.91	582.93

NOTES

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive offsets are right of the PGL.

MODEL Default: p:\projects\transystems-pw\hntb\comtrans\corp-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structural\0998309-83R23-S2\1-DEW\03d.dgn

BEAM W4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	-29.54	592.31	592.33
⌀ E BRG. PIER 5 WB	52+11.63	-29.54	592.26	592.28
3A	52+21.63	-29.54	591.95	592.03
3B	52+31.63	-29.54	591.64	591.78
3C	52+41.63	-29.54	591.34	591.52
3D	52+51.63	-29.54	591.03	591.25
3E	52+61.63	-29.54	590.72	590.97
3F	52+71.63	-29.54	590.42	590.68
3G	52+81.63	-29.54	590.11	590.38
3H	52+91.63	-29.54	589.80	590.07
3I	53+01.63	-29.54	589.50	589.76
3J	53+11.63	-29.54	589.19	589.43
3K	53+21.63	-29.54	588.88	589.09
3L	53+31.63	-29.54	588.58	588.75
3M	53+41.63	-29.54	588.27	588.40
3N	53+51.63	-29.54	587.96	588.03
⌀ W BRG PIER 6 WB	53+59.53	-29.54	587.72	587.74
⌀ PIER 6 WB	53+60.65	-29.54	587.69	587.71
⌀ E BRG PIER 6 WB	53+61.78	-29.54	587.65	587.67
3O	53+71.78	-29.54	587.35	587.43
3P	53+81.78	-29.54	587.04	587.18
3Q	53+91.78	-29.54	586.73	586.92
3R	54+01.78	-29.54	586.43	586.64
3S	54+11.78	-29.54	586.12	586.36
3T	54+21.78	-29.54	585.81	586.08
3U	54+31.78	-29.54	585.51	585.78
3V	54+41.78	-29.54	585.20	585.47
3W	54+51.78	-29.54	584.89	585.15
3X	54+61.78	-29.54	584.59	584.83
3Y	54+71.78	-29.54	584.27	584.48
3Z	54+81.78	-29.54	583.95	584.12
3AA	54+91.78	-29.54	583.63	583.76
3AB	55+01.78	-29.54	583.31	583.38
⌀ W. BRG. PIER 7 WB	55+09.67	-29.54	583.05	583.07
⌀ PIER 7 WB	55+10.88	-29.54	583.00	583.02

CROWN - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	-24.00	592.39	592.41
⌀ E BRG. PIER 5 WB	52+11.63	-24.00	592.34	592.36
3A	52+21.63	-24.00	592.03	592.11
3B	52+31.63	-24.00	591.73	591.86
3C	52+41.63	-24.00	591.42	591.60
3D	52+51.63	-24.00	591.11	591.33
3E	52+61.63	-24.00	590.81	591.05
3F	52+71.63	-24.00	590.50	590.76
3G	52+81.63	-24.00	590.19	590.46
3H	52+91.63	-24.00	589.89	590.15
3I	53+01.63	-24.00	589.58	589.84
3J	53+11.63	-24.00	589.27	589.51
3K	53+21.63	-24.00	588.97	589.18
3L	53+31.63	-24.00	588.66	588.83
3M	53+41.63	-24.00	588.35	588.48
3N	53+51.63	-24.00	588.05	588.12
⌀ W BRG PIER 6 WB	53+59.53	-24.00	587.81	587.83
⌀ PIER 6 WB	53+60.65	-24.00	587.77	587.79
⌀ E BRG PIER 6 WB	53+61.78	-24.00	587.74	587.76
3O	53+71.78	-24.00	587.43	587.51
3P	53+81.78	-24.00	587.12	587.26
3Q	53+91.78	-24.00	586.82	587.00
3R	54+01.78	-24.00	586.51	586.73
3S	54+11.78	-24.00	586.20	586.45
3T	54+21.78	-24.00	585.90	586.16
3U	54+31.78	-24.00	585.59	585.86
3V	54+41.78	-24.00	585.28	585.55
3W	54+51.78	-24.00	584.98	585.24
3X	54+61.78	-24.00	584.67	584.91
3Y	54+71.78	-24.00	584.35	584.56
3Z	54+81.78	-24.00	584.03	584.21
3AA	54+91.78	-24.00	583.71	583.84
3AB	55+01.78	-24.00	583.39	583.46
⌀ W. BRG. PIER 7 WB	55+09.67	-24.00	583.14	583.16
⌀ PIER 7 WB	55+10.88	-24.00	583.09	583.11

BEAM W5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	-19.65	592.33	592.35
⌀ E BRG. PIER 5 WB	52+11.63	-19.65	592.27	592.30
3A	52+21.63	-19.65	591.97	592.05
3B	52+31.63	-19.65	591.66	591.80
3C	52+41.63	-19.65	591.35	591.54
3D	52+51.63	-19.65	591.05	591.26
3E	52+61.63	-19.65	590.74	590.98
3F	52+71.63	-19.65	590.43	590.70
3G	52+81.63	-19.65	590.13	590.40
3H	52+91.63	-19.65	589.82	590.09
3I	53+01.63	-19.65	589.52	589.77
3J	53+11.63	-19.65	589.21	589.45
3K	53+21.63	-19.65	588.90	589.11
3L	53+31.63	-19.65	588.60	588.77
3M	53+41.63	-19.65	588.29	588.41
3N	53+51.63	-19.65	587.98	588.05
⌀ W BRG PIER 6 WB	53+59.53	-19.65	587.74	587.76
⌀ PIER 6 WB	53+60.65	-19.65	587.71	587.73
⌀ E BRG PIER 6 WB	53+61.78	-19.65	587.67	587.69
3O	53+71.78	-19.65	587.36	587.45
3P	53+81.78	-19.65	587.06	587.19
3Q	53+91.78	-19.65	586.75	586.93
3R	54+01.78	-19.65	586.45	586.66
3S	54+11.78	-19.65	586.14	586.38
3T	54+21.78	-19.65	585.83	586.09
3U	54+31.78	-19.65	585.53	585.79
3V	54+41.78	-19.65	585.22	585.49
3W	54+51.78	-19.65	584.91	585.17
3X	54+61.78	-19.65	584.61	584.84
3Y	54+71.78	-19.65	584.29	584.50
3Z	54+81.78	-19.65	583.97	584.14
3AA	54+91.78	-19.65	583.65	583.77
3AB	55+01.78	-19.65	583.33	583.40
⌀ W. BRG. PIER 7 WB	55+09.67	-19.65	583.07	583.09
⌀ PIER 7 WB	55+10.88	-19.65	583.02	583.05

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 0.167 ' / in.
PLOT DATE	= 11/5/2025

DESIGNED	-	LAS
CHECKED	-	PJL
DRAWN	-	GM
CHECKED	-	LAS

REVISED	-
REVISED	-
REVISED	-
REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATION 3 - UNIT 3 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-69 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	650
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

PGL I-80 WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 WB	52+09.88	0.00	591.97	591.99
☐ E BRG. PIER 5 WB	52+11.63	0.00	591.92	591.94
3A	52+21.63	0.00	591.61	591.70
3B	52+31.63	0.00	591.31	591.45
3C	52+41.63	0.00	591.00	591.19
3D	52+51.63	0.00	590.69	590.92
3E	52+61.63	0.00	590.39	590.64
3F	52+71.63	0.00	590.08	590.35
3G	52+81.63	0.00	589.77	590.05
3H	52+91.63	0.00	589.47	589.74
3I	53+01.63	0.00	589.16	589.43
3J	53+11.63	0.00	588.85	589.10
3K	53+21.63	0.00	588.55	588.76
3L	53+31.63	0.00	588.24	588.42
3M	53+41.63	0.00	587.93	588.06
3N	53+51.63	0.00	587.63	587.70
☐ W BRG PIER 6 WB	53+59.53	0.00	587.39	587.41
☐ PIER 6 WB	53+60.65	0.00	587.35	587.37
☐ E BRG PIER 6 WB	53+61.78	0.00	587.32	587.34
3O	53+71.78	0.00	587.01	587.09
3P	53+81.78	0.00	586.70	586.84
3Q	53+91.78	0.00	586.40	586.58
3R	54+01.78	0.00	586.09	586.31
3S	54+11.78	0.00	585.78	586.03
3T	54+21.78	0.00	585.48	585.75
3U	54+31.78	0.00	585.17	585.45
3V	54+41.78	0.00	584.86	585.14
3W	54+51.78	0.00	584.56	584.83
3X	54+61.78	0.00	584.25	584.50
3Y	54+71.78	0.00	583.94	584.16
3Z	54+81.78	0.00	583.64	583.82
3AA	54+91.78	0.00	583.33	583.46
3AB	55+01.78	0.00	583.02	583.10
☐ W. BRG. PIER 7 WB	55+09.67	0.00	582.78	582.80
☐ PIER 7 WB	55+10.88	0.00	582.75	582.77

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\projects\transystems-pw\hntb\transystems-corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1_Sheets\Structure\0998309-8325-52\3-DEW\306.dgn

BEAM W7

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	0.15	591.97	591.99
⌀ E BRG. PIER 5 WB	52+11.63	0.15	591.92	591.94
3A	52+21.63	0.15	591.61	591.69
3B	52+31.63	0.15	591.30	591.44
3C	52+41.63	0.15	591.00	591.19
3D	52+51.63	0.15	590.69	590.91
3E	52+61.63	0.15	590.38	590.64
3F	52+71.63	0.15	590.08	590.35
3G	52+81.63	0.15	589.77	590.05
3H	52+91.63	0.15	589.46	589.74
3I	53+01.63	0.15	589.16	589.42
3J	53+11.63	0.15	588.85	589.10
3K	53+21.63	0.15	588.54	588.76
3L	53+31.63	0.15	588.24	588.41
3M	53+41.63	0.15	587.93	588.06
3N	53+51.63	0.15	587.62	587.69
⌀ W BRG PIER 6 WB	53+59.53	0.15	587.38	587.40
⌀ PIER 6 WB	53+60.65	0.15	587.35	587.37
⌀ E BRG PIER 6 WB	53+61.78	0.15	587.31	587.33
3O	53+71.78	0.15	587.01	587.09
3P	53+81.78	0.15	586.70	586.84
3Q	53+91.78	0.15	586.39	586.58
3R	54+01.78	0.15	586.09	586.31
3S	54+11.78	0.15	585.78	586.03
3T	54+21.78	0.15	585.47	585.74
3U	54+31.78	0.15	585.17	585.44
3V	54+41.78	0.15	584.86	585.14
3W	54+51.78	0.15	584.55	584.82
3X	54+61.78	0.15	584.25	584.49
3Y	54+71.78	0.15	583.94	584.16
3Z	54+81.78	0.15	583.64	583.81
3AA	54+91.78	0.15	583.33	583.46
3AB	55+01.78	0.15	583.02	583.09
⌀ W. BRG. PIER 7 WB	55+09.67	0.15	582.78	582.80
⌀ PIER 7 WB	55+10.88	0.15	582.74	582.76

BEAM W8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	10.04	591.77	591.79
⌀ E BRG. PIER 5 WB	52+11.63	10.04	591.72	591.74
3A	52+21.63	10.04	591.41	591.49
3B	52+31.63	10.04	591.11	591.24
3C	52+41.63	10.04	590.80	590.97
3D	52+51.63	10.04	590.49	590.70
3E	52+61.63	10.04	590.19	590.42
3F	52+71.63	10.04	589.88	590.13
3G	52+81.63	10.04	589.57	589.83
3H	52+91.63	10.04	589.27	589.52
3I	53+01.63	10.04	588.96	589.21
3J	53+11.63	10.04	588.65	588.88
3K	53+21.63	10.04	588.35	588.54
3L	53+31.63	10.04	588.04	588.20
3M	53+41.63	10.04	587.73	587.85
3N	53+51.63	10.04	587.43	587.49
⌀ W BRG PIER 6 WB	53+59.53	10.04	587.18	587.21
⌀ PIER 6 WB	53+60.65	10.04	587.15	587.17
⌀ E BRG PIER 6 WB	53+61.78	10.04	587.12	587.14
3O	53+71.78	10.04	586.81	586.89
3P	53+81.78	10.04	586.50	586.63
3Q	53+91.78	10.04	586.20	586.37
3R	54+01.78	10.04	585.89	586.09
3S	54+11.78	10.04	585.58	585.81
3T	54+21.78	10.04	585.28	585.53
3U	54+31.78	10.04	584.97	585.23
3V	54+41.78	10.04	584.66	584.92
3W	54+51.78	10.04	584.36	584.60
3X	54+61.78	10.04	584.05	584.28
3Y	54+71.78	10.04	583.74	583.94
3Z	54+81.78	10.04	583.44	583.60
3AA	54+91.78	10.04	583.13	583.25
3AB	55+01.78	10.04	582.82	582.89
⌀ W. BRG. PIER 7 WB	55+09.67	10.04	582.58	582.60
⌀ PIER 7 WB	55+10.88	10.04	582.54	582.57

INSIDE FACE OF SOUTH PARAPET - WB


Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 5 WB	52+09.88	12.00	591.73	591.75
⌀ E BRG. PIER 5 WB	52+11.63	12.00	591.68	591.70
3A	52+21.63	12.00	591.37	591.45
3B	52+31.63	12.00	591.07	591.20
3C	52+41.63	12.00	590.76	590.94
3D	52+51.63	12.00	590.45	590.66
3E	52+61.63	12.00	590.15	590.38
3F	52+71.63	12.00	589.84	590.09
3G	52+81.63	12.00	589.53	589.79
3H	52+91.63	12.00	589.23	589.48
3I	53+01.63	12.00	588.92	589.17
3J	53+11.63	12.00	588.61	588.84
3K	53+21.63	12.00	588.31	588.51
3L	53+31.63	12.00	588.00	588.16
3M	53+41.63	12.00	587.69	587.81
3N	53+51.63	12.00	587.39	587.45
⌀ W BRG PIER 6 WB	53+59.53	12.00	587.15	587.17
⌀ PIER 6 WB	53+60.65	12.00	587.11	587.13
⌀ E BRG PIER 6 WB	53+61.78	12.00	587.08	587.10
3O	53+71.78	12.00	586.77	586.85
3P	53+81.78	12.00	586.46	586.59
3Q	53+91.78	12.00	586.16	586.33
3R	54+01.78	12.00	585.85	586.06
3S	54+11.78	12.00	585.54	585.77
3T	54+21.78	12.00	585.24	585.49
3U	54+31.78	12.00	584.93	585.19
3V	54+41.78	12.00	584.62	584.88
3W	54+51.78	12.00	584.32	584.57
3X	54+61.78	12.00	584.01	584.24
3Y	54+71.78	12.00	583.70	583.91
3Z	54+81.78	12.00	583.40	583.56
3AA	54+91.78	12.00	583.09	583.21
3AB	55+01.78	12.00	582.78	582.85
⌀ W. BRG. PIER 7 WB	55+09.67	12.00	582.54	582.56
⌀ PIER 7 WB	55+10.88	12.00	582.51	582.53

NOTES:


1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATION 5 - UNIT 3 WB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-71 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	652
		PLOT SCALE = 0.167" / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

MODEL Default: P:\projects\trans\systems\pw\unit3eb\unit3eb.dgn
FILE NAME: P:\projects\trans\systems\pw\unit3eb\unit3eb.dgn
PROJECT: 2018 CH4001401180022703-MS97\CD\62R23-RB-1-Sheets\Structural\0998309-42R23-S245-DEE302.dgn

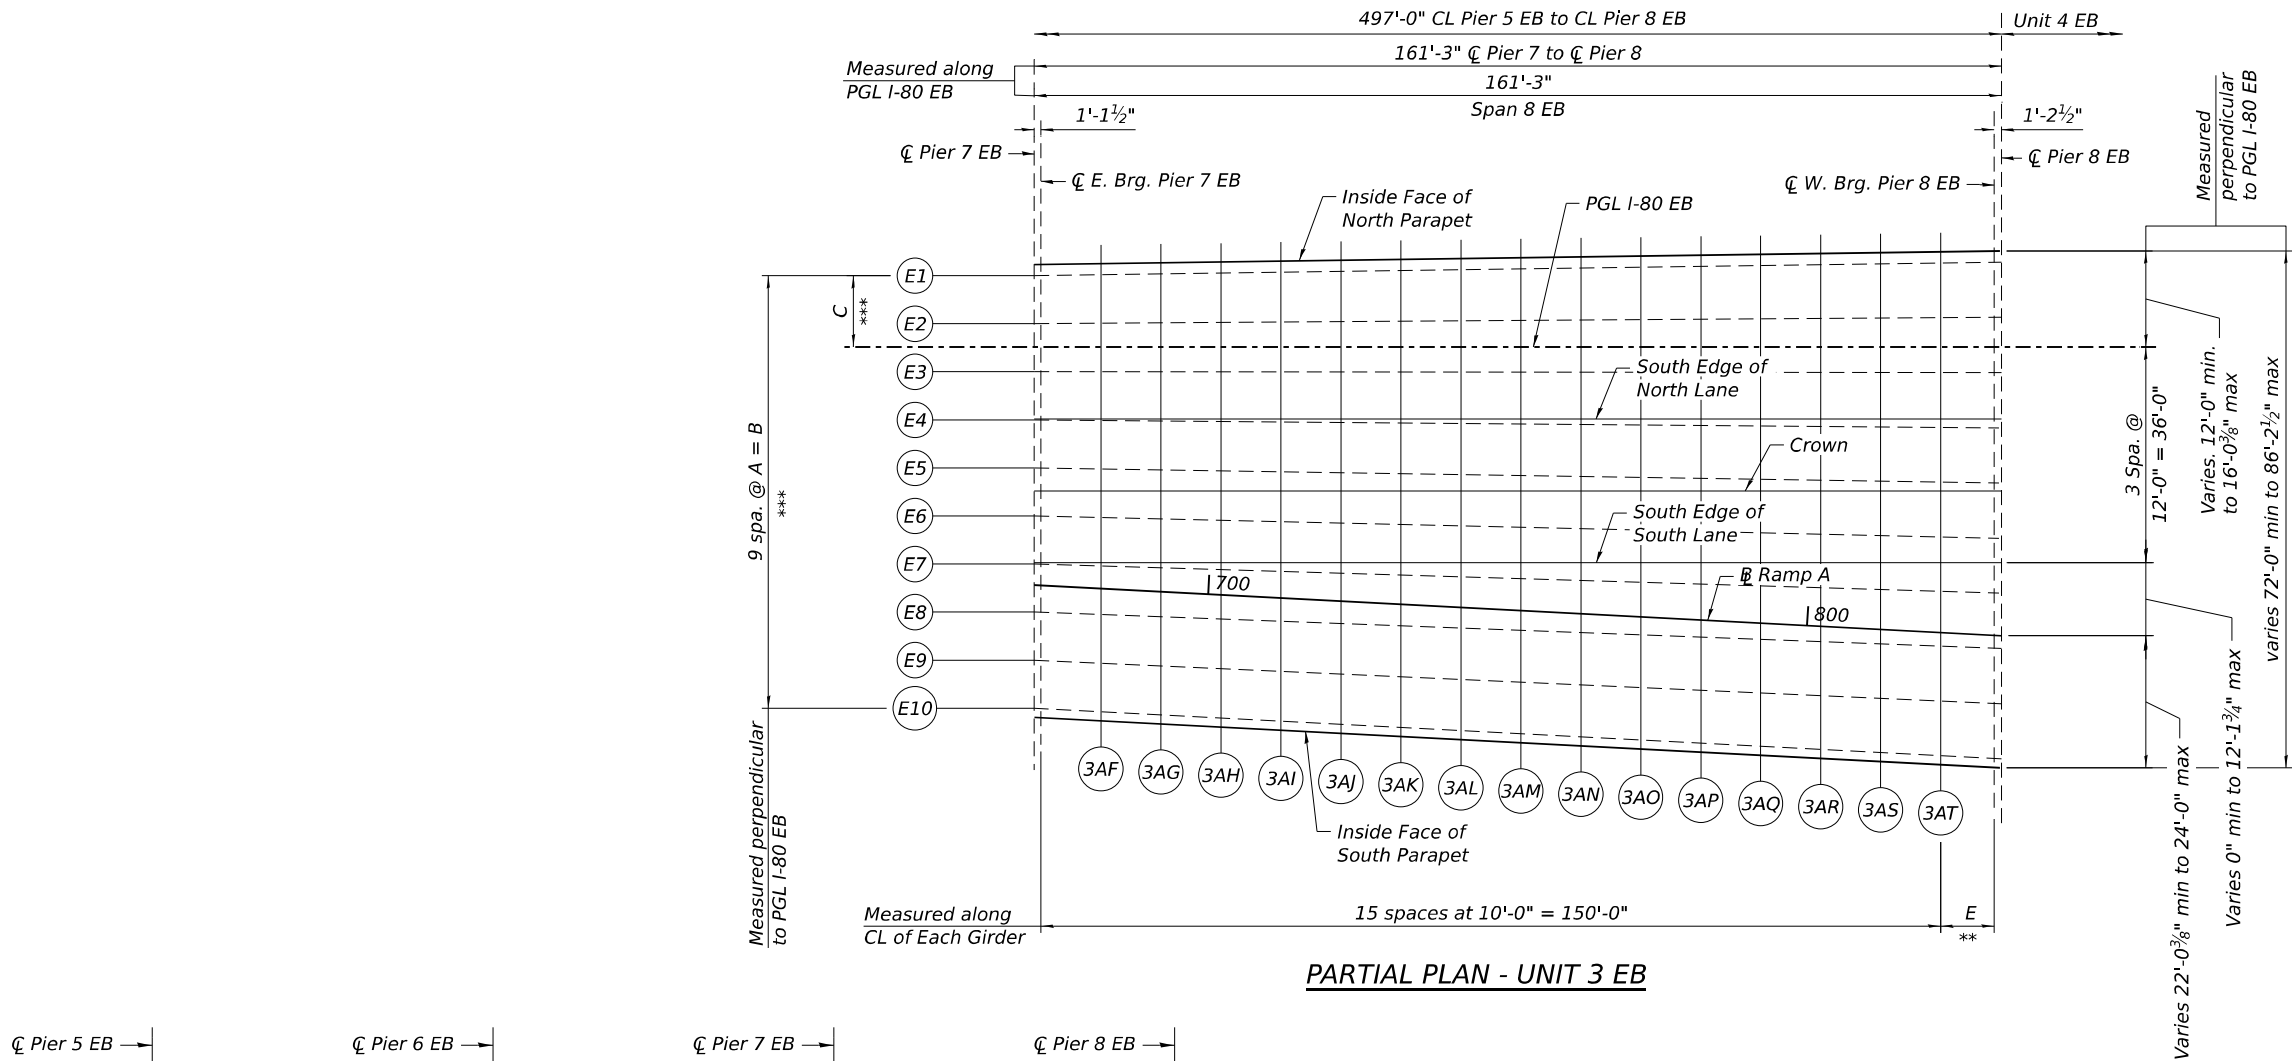


** See Top of Slab Dimensions Table on sheet S-72
*** See Table of Girder Spacing on sheet S-72

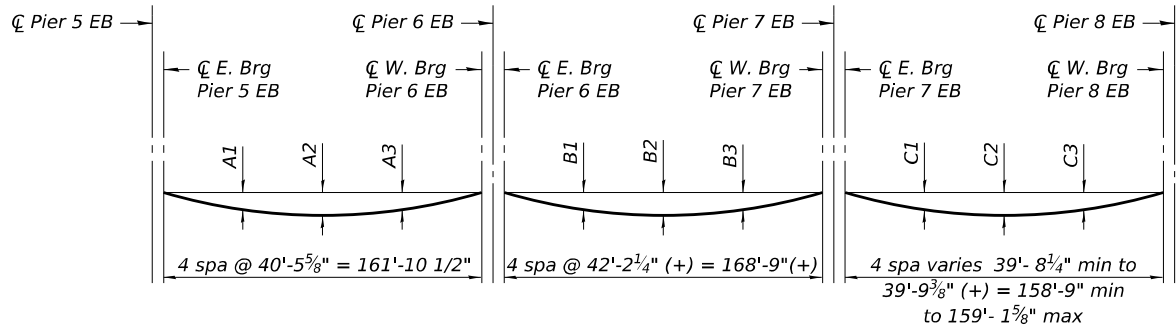

DEAD LOAD DEFLECTION DIAGRAM
(Includes weight of concrete, excluding beams)

Note:
The above deflections are not to be used in the field if the engineer is working from the grade elevations adjusted for dead load deflections and grinding as shown on sheets S-74 to S-79.

Beam	DEAD LOAD DEFLECTIONS (INCHES)								
	Span 6 (EB)			Span 7 (EB)			Span 8 (EB)		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
E1	2	2 5/8	2	2 1/4	3	2 1/4	1 7/8	2 1/2	1 7/8
E2	2 1/8	2 3/4	2	2 3/8	3 1/8	2 3/8	1 7/8	2 5/8	2
E3	2 1/8	2 3/4	2	2 3/8	3 1/8	2 3/8	1 7/8	2 5/8	2
E4	2	2 5/8	2	2 3/8	3 1/8	2 3/8	1 7/8	2 1/2	1 7/8
E5	2	2 5/8	2	2 3/8	3 1/8	2 3/8	1 7/8	2 1/2	1 7/8
E6	2	2 5/8	2	2 3/8	3 1/8	2 3/8	1 7/8	2 1/2	1 7/8
E7	2	2 5/8	2	2 3/8	3 1/8	2 3/8	1 7/8	2 1/2	1 7/8
E8	2 1/8	2 7/8	2 1/8	2 3/8	3 1/4	2 3/8	2	2 3/4	2 1/8
E9	2 1/8	2 7/8	2 1/8	2 3/8	3 1/4	2 3/8	2	2 3/4	2 1/8
E10	2 1/2	3 1/4	2 3/8	2 5/8	3 5/8	2 5/8	2 1/4	3	2 1/4

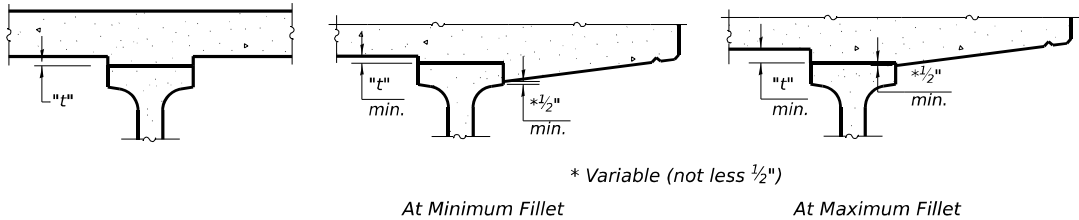

INTERIOR BEAMS

EXTERIOR BEAMS

FILLET HEIGHTS

To determine "t": After all precast prestressed beams have been erected, elevations of the top flanges of the beams shall be taken at intervals shown. These elevations subtracted from the "Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding" shown on sheets S-74 to S-79, minus the initial slab thickness prior to grinding, equals the fillet heights "t" above top flange of beams.
The slab is to be ground after curing to achieve smoothness, but the slab is not to be ground to elevations below the "Theoretical Grade Elevations" shown on sheets S-74 to S-79. For grinding the deck, see Special Provisions.

NOTES:

- Up to 1/4 inch to be ground off the bridge deck and bridge approach slabs. The Profile Grade shows the final grade after grinding.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614
PLOT SCALE	= 32:0.0000 " = 1 in.
PLOT DATE	= 11/5/2025

DESIGNED	- LAS
CHECKED	- PJL
DRAWN	- GM
CHECKED	- LAS

REVISED	-
REVISED	-
REVISED	-
REVISED	-

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TOP OF SLAB ELEVATION PLAN - UNIT 3 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**

SHEET S-73 OF S-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	654
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

INSIDE FACE OF NORTH PARAPET - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	-12.00	592.48	592.50
☐ E BRG. PIER 5 EB	51+86.87	-12.00	592.43	592.45
3A	51+96.87	-12.00	592.13	592.20
3B	52+06.87	-12.00	591.83	591.94
3C	52+16.87	-12.00	591.52	591.67
3D	52+26.87	-12.00	591.21	591.40
3E	52+36.87	-12.00	590.91	591.12
3F	52+46.87	-12.00	590.60	590.83
3G	52+56.87	-12.00	590.29	590.53
3H	52+66.87	-12.00	589.99	590.23
3I	52+76.87	-12.00	589.68	589.92
3J	52+86.87	-12.00	589.37	589.60
3K	52+96.87	-12.00	589.07	589.28
3L	53+06.87	-12.00	588.76	588.95
3M	53+16.87	-12.00	588.45	588.61
3N	53+26.87	-12.00	588.15	588.27
3O	53+36.87	-12.00	587.84	587.92
☐ W BRG PIER 6 EB	53+48.75	-12.00	587.48	587.50
☐ PIER 6 EB	53+49.87	-12.00	587.44	587.46
☐ E BRG PIER 6 EB	53+51.00	-12.01	587.41	587.43
3P	53+60.99	-12.11	587.10	587.17
3Q	53+70.99	-12.21	586.79	586.91
3R	53+80.99	-12.32	586.48	586.65
3S	53+90.99	-12.42	586.17	586.37
3T	54+00.99	-12.52	585.86	586.09
3U	54+10.99	-12.62	585.56	585.81
3V	54+20.99	-12.72	585.25	585.51
3W	54+30.99	-12.82	584.94	585.21
3X	54+40.99	-12.92	584.63	584.90
3Y	54+50.99	-13.02	584.32	584.59
3Z	54+60.99	-13.12	584.01	584.26
3AA	54+70.99	-13.23	583.70	583.93
3AB	54+80.99	-13.33	583.40	583.59
3AC	54+90.99	-13.43	583.09	583.25
3AD	55+00.99	-13.53	582.78	582.90
3AE	55+10.99	-13.63	582.47	582.54
☐ W. BRG. PIER 7 EB	55+19.75	-13.72	582.20	582.22
☐ PIER 7 EB	55+20.87	-13.73	582.16	582.19
☐ E. BRG. PIER 7 EB	55+22.00	-13.75	582.13	582.15
3AF	55+31.99	-13.89	581.82	581.89
3AG	55+41.99	-14.03	581.51	581.62
3AH	55+51.99	-14.17	581.20	581.35
3AI	55+61.99	-14.31	580.89	581.07
3AJ	55+71.99	-14.46	580.58	580.78
3AK	55+81.99	-14.60	580.27	580.49
3AL	55+91.99	-14.74	579.96	580.19
3AM	56+01.99	-14.88	579.66	579.89
3AN	56+11.99	-15.02	579.35	579.57
3AO	56+21.98	-15.17	579.04	579.25
3AP	56+31.98	-15.31	578.73	578.93
3AQ	56+41.98	-15.45	578.42	578.59
3AR	56+51.98	-15.59	578.11	578.25
3AS	56+61.98	-15.73	577.80	577.91
3AT	56+71.98	-15.87	577.47	577.53
☐ W. BRG. PIER 8 EB	56+80.91	-16.00	577.17	577.19
☐ PIER 8 EB	56+82.12	-16.02	577.13	577.15

BEAM E1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	-10.13	592.52	592.54
☐ E BRG. PIER 5 EB	51+86.87	-10.13	592.47	592.49
3A	51+96.87	-10.13	592.17	592.24
3B	52+06.87	-10.13	591.86	591.98
3C	52+16.87	-10.13	591.56	591.71
3D	52+26.87	-10.13	591.25	591.43
3E	52+36.87	-10.13	590.94	591.15
3F	52+46.87	-10.13	590.64	590.86
3G	52+56.87	-10.13	590.33	590.57
3H	52+66.87	-10.13	590.02	590.27
3I	52+76.87	-10.13	589.72	589.95
3J	52+86.87	-10.13	589.41	589.64
3K	52+96.87	-10.13	589.10	589.31
3L	53+06.87	-10.13	588.80	588.98
3M	53+16.87	-10.13	588.49	588.65
3N	53+26.87	-10.13	588.18	588.30
3O	53+36.87	-10.13	587.88	587.96
☐ W BRG PIER 6 EB	53+48.75	-10.13	587.51	587.53
☐ PIER 6 EB	53+49.87	-10.13	587.48	587.50
☐ E BRG PIER 6 EB	53+51.00	-10.14	587.44	587.47
3P	53+60.99	-10.24	587.14	587.21
3Q	53+70.99	-10.34	586.83	586.95
3R	53+80.99	-10.44	586.52	586.68
3S	53+90.99	-10.54	586.21	586.41
3T	54+00.99	-10.64	585.90	586.13
3U	54+10.99	-10.74	585.59	585.84
3V	54+20.99	-10.84	585.28	585.55
3W	54+30.99	-10.95	584.98	585.25
3X	54+40.99	-11.05	584.67	584.94
3Y	54+50.99	-11.15	584.36	584.62
3Z	54+60.99	-11.25	584.05	584.30
3AA	54+70.99	-11.35	583.74	583.97
3AB	54+80.99	-11.45	583.43	583.63
3AC	54+90.99	-11.55	583.12	583.28
3AD	55+00.99	-11.65	582.82	582.93
3AE	55+10.99	-11.76	582.51	582.57
☐ W. BRG. PIER 7 EB	55+19.75	-11.84	582.24	582.26
☐ PIER 7 EB	55+20.87	-11.86	582.20	582.22
☐ E. BRG. PIER 7 EB	55+22.00	-11.87	582.17	582.19
3AF	55+31.99	-12.01	581.86	581.93
3AG	55+41.99	-12.16	581.55	581.66
3AH	55+51.99	-12.30	581.24	581.39
3AI	55+61.99	-12.44	580.93	581.10
3AJ	55+71.99	-12.58	580.62	580.82
3AK	55+81.99	-12.72	580.31	580.53
3AL	55+91.99	-12.86	580.00	580.23
3AM	56+01.99	-13.01	579.69	579.92
3AN	56+11.99	-13.15	579.38	579.61
3AO	56+21.98	-13.29	579.07	579.29
3AP	56+31.98	-13.43	578.76	578.96
3AQ	56+41.98	-13.57	578.46	578.63
3AR	56+51.98	-13.72	578.15	578.29
3AS	56+61.98	-13.86	577.83	577.94
3AT	56+71.98	-14.00	577.51	577.57
☐ W. BRG. PIER 8 EB	56+80.91	-14.13	577.21	577.24
☐ PIER 8 EB	56+82.12	-14.14	577.17	577.20

BEAM E2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☪ PIER 5 EB	51+85.12	-2.50	592.67	592.69
☪ E BRG. PIER 5 EB	51+86.87	-2.50	592.62	592.64
3A	51+96.87	-2.50	592.32	592.39
3B	52+06.87	-2.50	592.02	592.14
3C	52+16.87	-2.50	591.71	591.87
3D	52+26.87	-2.50	591.40	591.59
3E	52+36.87	-2.50	591.10	591.32
3F	52+46.87	-2.50	590.79	591.03
3G	52+56.87	-2.50	590.48	590.73
3H	52+66.87	-2.50	590.18	590.43
3I	52+76.87	-2.50	589.87	590.12
3J	52+86.87	-2.50	589.56	589.80
3K	52+96.87	-2.50	589.26	589.48
3L	53+06.87	-2.50	588.95	589.14
3M	53+16.87	-2.50	588.64	588.81
3N	53+26.87	-2.50	588.34	588.46
3O	53+36.87	-2.50	588.03	588.11
☪ W BRG PIER 6 EB	53+48.75	-2.50	587.67	587.69
☪ PIER 6 EB	53+49.87	-2.50	587.63	587.65
☪ E BRG PIER 6 EB	53+51.00	-2.50	587.60	587.62
3P	53+60.99	-2.58	587.29	587.36
3Q	53+70.99	-2.66	586.98	587.11
3R	53+80.99	-2.74	586.67	586.84
3S	53+90.99	-2.82	586.36	586.57
3T	54+00.99	-2.90	586.06	586.30
3U	54+10.99	-2.97	585.75	586.01
3V	54+20.99	-3.05	585.44	585.72
3W	54+30.99	-3.13	585.13	585.41
3X	54+40.99	-3.21	584.82	585.10
3Y	54+50.99	-3.29	584.52	584.79
3Z	54+60.99	-3.37	584.21	584.46
3AA	54+70.99	-3.45	583.90	584.13
3AB	54+80.99	-3.53	583.59	583.80
3AC	54+90.99	-3.61	583.28	583.45
3AD	55+00.99	-3.69	582.98	583.10
3AE	55+10.99	-3.77	582.67	582.74
☪ W. BRG. PIER 7 EB	55+19.75	-3.84	582.40	582.42
☪ PIER 7 EB	55+20.87	-3.84	582.36	582.38
☪ E. BRG. PIER 7 EB	55+22.00	-3.85	582.33	582.35
3AF	55+31.99	-3.92	582.02	582.09
3AG	55+41.99	-3.99	581.71	581.83
3AH	55+51.99	-4.06	581.40	581.56
3AI	55+61.99	-4.12	581.10	581.28
3AJ	55+71.99	-4.19	580.79	581.00
3AK	55+81.99	-4.26	580.48	580.71
3AL	55+91.99	-4.33	580.17	580.41
3AM	56+01.99	-4.40	579.86	580.11
3AN	56+11.99	-4.46	579.56	579.79
3AO	56+21.99	-4.53	579.25	579.47
3AP	56+31.99	-4.60	578.94	579.15
3AQ	56+41.99	-4.67	578.63	578.82
3AR	56+51.99	-4.74	578.33	578.48
3AS	56+61.99	-4.80	578.02	578.13
3AT	56+71.99	-4.87	577.70	577.77
☪ W. BRG. PIER 8EB	56+80.91	-4.93	577.42	577.44
☪ PIER 8 EB	56+82.12	-4.94	577.38	577.40

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hantley.com\trans\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structure\0998309-8325-52472-DEE304.dgn

PGL I-80 EB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	0.00	592.72	592.74
☐ E BRG. PIER 5 EB	51+86.87	0.00	592.67	592.69
3A	51+96.87	0.00	592.37	592.44
3B	52+06.87	0.00	592.07	592.19
3C	52+16.87	0.00	591.76	591.92
3D	52+26.87	0.00	591.45	591.64
3E	52+36.87	0.00	591.15	591.37
3F	52+46.87	0.00	590.84	591.08
3G	52+56.87	0.00	590.53	590.78
3H	52+66.87	0.00	590.23	590.48
3I	52+76.87	0.00	589.92	590.17
3J	52+86.87	0.00	589.61	589.85
3K	52+96.87	0.00	589.31	589.53
3L	53+06.87	0.00	589.00	589.19
3M	53+16.87	0.00	588.69	588.86
3N	53+26.87	0.00	588.39	588.51
3O	53+36.87	0.00	588.08	588.16
☐ W BRG PIER 6 EB	53+48.75	0.00	587.72	587.74
☐ PIER 6 EB	53+49.87	0.00	587.68	587.70
☐ E BRG PIER 6 EB	53+51.00	0.00	587.65	587.67
3P	53+61.00	0.00	587.34	587.42
3Q	53+71.00	0.00	587.03	587.16
3R	53+81.00	0.00	586.73	586.90
3S	53+91.00	0.00	586.42	586.63
3T	54+01.00	0.00	586.11	586.35
3U	54+11.00	0.00	585.81	586.07
3V	54+21.00	0.00	585.50	585.78
3W	54+31.00	0.00	585.19	585.48
3X	54+41.00	0.00	584.89	585.17
3Y	54+51.00	0.00	584.58	584.86
3Z	54+61.00	0.00	584.28	584.53
3AA	54+71.00	0.00	583.97	584.20
3AB	54+81.00	0.00	583.66	583.87
3AC	54+91.00	0.00	583.36	583.52
3AD	55+01.00	0.00	583.05	583.17
3AE	55+11.00	0.00	582.74	582.81
☐ W. BRG. PIER 7 EB	55+19.75	0.00	582.47	582.49
☐ PIER 7 EB	55+20.87	0.00	582.44	582.46
☐ E. BRG. PIER 7 EB	55+22.00	0.00	582.41	582.43
3AF	55+32.00	0.00	582.10	582.17
3AG	55+42.00	0.00	581.79	581.91
3AH	55+52.00	0.00	581.49	581.64
3AI	55+62.00	0.00	581.18	581.36
3AJ	55+72.00	0.00	580.87	581.08
3AK	55+82.00	0.00	580.57	580.79
3AL	55+92.00	0.00	580.26	580.49
3AM	56+02.00	0.00	579.95	580.19
3AN	56+12.00	0.00	579.65	579.88
3AO	56+22.00	0.00	579.34	579.56
3AP	56+32.00	0.00	579.03	579.24
3AQ	56+42.00	0.00	578.73	578.91
3AR	56+52.00	0.00	578.42	578.57
3AS	56+62.00	0.00	578.11	578.23
3AT	56+72.00	0.00	577.81	577.87
☐ W. BRG. PIER 8EB	56+80.91	0.00	577.53	577.55
☐ PIER 8 EB	56+82.12	0.00	577.50	577.52

BEAM E3				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	5.13	592.83	592.85
☐ E BRG. PIER 5 EB	51+86.87	5.13	592.77	592.79
3A	51+96.87	5.13	592.47	592.55
3B	52+06.87	5.13	592.17	592.29
3C	52+16.87	5.13	591.86	592.02
3D	52+26.87	5.13	591.55	591.75
3E	52+36.87	5.13	591.25	591.47
3F	52+46.87	5.13	590.94	591.18
3G	52+56.87	5.13	590.64	590.88
3H	52+66.87	5.13	590.33	590.58
3I	52+76.87	5.13	590.02	590.27
3J	52+86.87	5.13	589.72	589.95
3K	52+96.87	5.13	589.41	589.63
3L	53+06.87	5.13	589.10	589.30
3M	53+16.87	5.13	588.80	588.96
3N	53+26.87	5.13	588.49	588.61
3O	53+36.87	5.13	588.18	588.26
☐ W BRG PIER 6 EB	53+48.75	5.13	587.82	587.84
☐ PIER 6 EB	53+49.87	5.13	587.78	587.81
☐ E BRG PIER 6 EB	53+51.00	5.13	587.75	587.77
3P	53+60.99	5.07	587.44	587.52
3Q	53+70.99	5.01	587.13	587.26
3R	53+80.99	4.96	586.83	587.00
3S	53+90.99	4.90	586.52	586.73
3T	54+00.99	4.84	586.21	586.45
3U	54+10.99	4.79	585.90	586.16
3V	54+20.99	4.73	585.60	585.87
3W	54+30.99	4.67	585.29	585.57
3X	54+40.99	4.62	584.98	585.26
3Y	54+50.99	4.56	584.67	584.95
3Z	54+60.99	4.50	584.37	584.62
3AA	54+70.99	4.45	584.06	584.29
3AB	54+80.99	4.39	583.75	583.95
3AC	54+90.99	4.34	583.44	583.61
3AD	55+00.99	4.28	583.13	583.26
3AE	55+10.99	4.22	582.83	582.90
☐ W. BRG. PIER 7 EB	55+19.75	4.17	582.56	582.58
☐ PIER 7 EB	55+20.87	4.17	582.52	582.54
☐ E. BRG. PIER 7 EB	55+22.00	4.17	582.49	582.51
3AF	55+31.99	4.17	582.18	582.25
3AG	55+41.99	4.18	581.88	581.99
3AH	55+51.99	4.19	581.57	581.72
3AI	55+61.99	4.19	581.26	581.45
3AJ	55+71.99	4.20	580.96	581.16
3AK	55+81.99	4.20	580.65	580.88
3AL	55+91.99	4.21	580.34	580.58
3AM	56+01.99	4.22	580.04	580.28
3AN	56+11.99	4.22	579.73	579.97
3AO	56+21.99	4.23	579.42	579.65
3AP	56+31.99	4.23	579.12	579.33
3AQ	56+41.99	4.24	578.81	578.99
3AR	56+51.99	4.25	578.50	578.66
3AS	56+61.99	4.25	578.20	578.31
3AT	56+71.99	4.26	577.90	577.96
☐ W. BRG. PIER 8EB	56+80.91	4.26	577.63	577.65
☐ PIER 8 EB	56+82.12	4.26	577.59	577.61

SOUTH EDGE OF NORTH LANE - EB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	12.00	592.96	592.98
☐ E BRG. PIER 5 EB	51+86.87	12.00	592.91	592.93
3A	51+96.87	12.00	592.61	592.68
3B	52+06.87	12.00	592.31	592.42
3C	52+16.87	12.00	592.00	592.15
3D	52+26.87	12.00	591.69	591.87
3E	52+36.87	12.00	591.39	591.59
3F	52+46.87	12.00	591.08	591.30
3G	52+56.87	12.00	590.77	591.01
3H	52+66.87	12.00	590.47	590.71
3I	52+76.87	12.00	590.16	590.39
3J	52+86.87	12.00	589.85	590.08
3K	52+96.87	12.00	589.55	589.76
3L	53+06.87	12.00	589.24	589.43
3M	53+16.87	12.00	588.93	589.09
3N	53+26.87	12.00	588.63	588.75
3O	53+36.87	12.00	588.32	588.40
☐ W BRG PIER 6 EB	53+48.75	12.00	587.96	587.98
☐ PIER 6 EB	53+49.87	12.00	587.92	587.94
☐ E BRG PIER 6 EB	53+51.00	12.00	587.89	587.91
3P	53+61.00	12.00	587.58	587.66
3Q	53+71.00	12.00	587.27	587.40
3R	53+81.00	12.00	586.97	587.14
3S	53+91.00	12.00	586.66	586.87
3T	54+01.00	12.00	586.35	586.59
3U	54+11.00	12.00	586.05	586.30
3V	54+21.00	12.00	585.74	586.01
3W	54+31.00	12.00	585.43	585.71
3X	54+41.00	12.00	585.13	585.41
3Y	54+51.00	12.00	584.82	585.09
3Z	54+61.00	12.00	584.52	584.77
3AA	54+71.00	12.00	584.21	584.44
3AB	54+81.00	12.00	583.90	584.10
3AC	54+91.00	12.00	583.60	583.76
3AD	55+01.00	12.00	583.29	583.41
3AE	55+11.00	12.00	582.98	583.05
☐ W. BRG. PIER 7 EB	55+19.75	12.00	582.71	582.73
☐ PIER 7 EB	55+20.87	12.00	582.68	582.70
☐ E. BRG. PIER 7 EB	55+22.00	12.00	582.65	582.67
3AF	55+32.00	12.00	582.34	582.41
3AG	55+42.00	12.00	582.03	582.14
3AH	55+52.00	12.00	581.73	581.87
3AI	55+62.00	12.00	581.42	581.59
3AJ	55+72.00	12.00	581.11	581.31
3AK	55+82.00	12.00	580.81	581.02
3AL	55+92.00	12.00	580.50	580.72
3AM	56+02.00	12.00	580.19	580.42
3AN	56+12.00	12.00	579.89	580.11
3AO	56+22.00	12.00	579.58	579.79
3AP	56+32.00	12.00	579.27	579.47
3AQ	56+42.00	12.00	578.97	579.14
3AR	56+52.00	12.00	578.66	578.80
3AS	56+62.00	12.00	578.35	578.46
3AT	56+72.00	12.00	578.06	578.13
☐ W. BRG. PIER 8EB	56+80.91	12.00	577.80	577.83
☐ PIER 8 EB	56+82.12	12.00	577.77	577.79

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 2 - UNIT 3 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-75 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	656
		PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\projtrans\systems-pw-bentley.com\trans\corp-pw-labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structure\0998309-8325-EB-305.dgn

BEAM E4					BEAM E5					CROWN - EB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding	Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding	Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	12.75	592.97	592.99	☐ PIER 5 EB	51+85.12	20.38	593.09	593.11	☐ PIER 5 EB	51+85.12	24.00	593.14	593.16
☐ E BRG. PIER 5 EB	51+86.87	12.75	592.92	592.94	☐ E BRG. PIER 5 EB	51+86.87	20.38	593.04	593.06	☐ E BRG. PIER 5 EB	51+86.87	24.00	593.09	593.11
3A	51+96.87	12.75	592.62	592.69	3A	51+96.87	20.38	592.74	592.81	3A	51+96.87	24.00	592.79	592.86
3B	52+06.87	12.75	592.32	592.43	3B	52+06.87	20.38	592.43	592.55	3B	52+06.87	24.00	592.49	592.60
3C	52+16.87	12.75	592.01	592.16	3C	52+16.87	20.38	592.12	592.28	3C	52+16.87	24.00	592.18	592.33
3D	52+26.87	12.75	591.70	591.89	3D	52+26.87	20.38	591.82	592.00	3D	52+26.87	24.00	591.87	592.05
3E	52+36.87	12.75	591.40	591.60	3E	52+36.87	20.38	591.51	591.72	3E	52+36.87	24.00	591.57	591.77
3F	52+46.87	12.75	591.09	591.31	3F	52+46.87	20.38	591.20	591.43	3F	52+46.87	24.00	591.26	591.48
3G	52+56.87	12.75	590.78	591.02	3G	52+56.87	20.38	590.90	591.13	3G	52+56.87	24.00	590.95	591.19
3H	52+66.87	12.75	590.48	590.72	3H	52+66.87	20.38	590.59	590.83	3H	52+66.87	24.00	590.65	590.89
3I	52+76.87	12.75	590.17	590.41	3I	52+76.87	20.38	590.29	590.52	3I	52+76.87	24.00	590.34	590.57
3J	52+86.87	12.75	589.86	590.09	3J	52+86.87	20.38	589.98	590.20	3J	52+86.87	24.00	590.03	590.26
3K	52+96.87	12.75	589.56	589.77	3K	52+96.87	20.38	589.67	589.88	3K	52+96.87	24.00	589.73	589.94
3L	53+06.87	12.75	589.25	589.44	3L	53+06.87	20.38	589.37	589.55	3L	53+06.87	24.00	589.42	589.61
3M	53+16.87	12.75	588.94	589.10	3M	53+16.87	20.38	589.06	589.22	3M	53+16.87	24.00	589.11	589.27
3N	53+26.87	12.75	588.64	588.76	3N	53+26.87	20.38	588.75	588.87	3N	53+26.87	24.00	588.81	588.93
3O	53+36.87	12.75	588.33	588.41	3O	53+36.87	20.38	588.45	588.52	3O	53+36.87	24.00	588.50	588.58
☐ W BRG PIER 6 EB	53+48.75	12.75	587.97	587.99	☐ W BRG PIER 6 EB	53+48.75	20.38	588.08	588.10	☐ W BRG PIER 6 EB	53+48.75	24.00	588.14	588.16
☐ PIER 6 EB	53+49.87	12.75	587.93	587.95	☐ PIER 6 EB	53+49.87	20.38	588.05	588.07	☐ PIER 6 EB	53+49.87	24.00	588.10	588.12
☐ E BRG PIER 6 EB	53+51.00	12.75	587.90	587.92	☐ E BRG PIER 6 EB	53+51.00	20.38	588.01	588.03	☐ E BRG PIER 6 EB	53+51.00	24.00	588.07	588.09
3P	53+60.99	12.72	587.59	587.67	3P	53+60.99	20.36	587.71	587.78	3P	53+61.00	24.00	587.76	587.84
3Q	53+70.99	12.68	587.28	587.41	3Q	53+70.99	20.35	587.40	587.53	3Q	53+71.00	24.00	587.45	587.58
3R	53+80.99	12.65	586.98	587.15	3R	53+80.99	20.34	587.09	587.26	3R	53+81.00	24.00	587.15	587.32
3S	53+90.99	12.62	586.67	586.88	3S	53+90.99	20.33	586.79	586.99	3S	53+91.00	24.00	586.84	587.05
3T	54+00.99	12.58	586.36	586.60	3T	54+00.99	20.32	586.48	586.72	3T	54+01.00	24.00	586.53	586.77
3U	54+10.99	12.55	586.06	586.31	3U	54+10.99	20.31	586.17	586.43	3U	54+11.00	24.00	586.23	586.48
3V	54+20.99	12.51	585.75	586.02	3V	54+20.99	20.30	585.87	586.14	3V	54+21.00	24.00	585.92	586.19
3W	54+30.99	12.48	585.44	585.72	3W	54+30.99	20.29	585.56	585.84	3W	54+31.00	24.00	585.61	585.89
3X	54+40.99	12.45	585.13	585.41	3X	54+40.99	20.28	585.25	585.53	3X	54+41.00	24.00	585.31	585.59
3Y	54+50.99	12.41	584.83	585.10	3Y	54+50.99	20.27	584.95	585.22	3Y	54+51.00	24.00	585.00	585.27
3Z	54+60.99	12.38	584.52	584.78	3Z	54+60.99	20.26	584.64	584.89	3Z	54+61.00	24.00	584.70	584.95
3AA	54+70.99	12.35	584.21	584.45	3AA	54+70.99	20.24	584.33	584.57	3AA	54+71.00	24.00	584.39	584.62
3AB	54+80.99	12.31	583.91	584.11	3AB	54+80.99	20.23	584.03	584.23	3AB	54+81.00	24.00	584.08	584.28
3AC	54+90.99	12.28	583.60	583.77	3AC	54+90.99	20.22	583.72	583.88	3AC	54+91.00	24.00	583.78	583.94
3AD	55+00.99	12.25	583.29	583.42	3AD	55+00.99	20.21	583.41	583.53	3AD	55+01.00	24.00	583.47	583.59
3AE	55+10.99	12.21	582.99	583.05	3AE	55+10.99	20.20	583.11	583.17	3AE	55+11.00	24.00	583.16	583.23
☐ W. BRG. PIER 7 EB	55+19.75	12.18	582.72	582.74	☐ W. BRG. PIER 7 EB	55+19.75	20.19	582.84	582.86	☐ W. BRG. PIER 7 EB	55+19.75	24.00	582.89	582.91
☐ PIER 7 EB	55+20.87	12.18	582.68	582.70	☐ PIER 7 EB	55+20.87	20.19	582.80	582.82	☐ PIER 7 EB	55+20.87	24.00	582.86	582.88
☐ E. BRG. PIER 7 EB	55+22.00	12.19	582.65	582.67	☐ E. BRG. PIER 7 EB	55+22.00	20.21	582.77	582.79	☐ E. BRG. PIER 7 EB	55+22.00	24.00	582.83	582.85
3AF	55+31.99	12.27	582.34	582.41	3AF	55+31.99	20.36	582.46	582.53	3AF	55+32.00	24.00	582.52	582.59
3AG	55+41.99	12.35	582.04	582.15	3AG	55+41.99	20.51	582.16	582.27	3AG	55+42.00	24.00	582.21	582.32
3AH	55+51.99	12.43	581.73	581.88	3AH	55+51.99	20.67	581.86	582.00	3AH	55+52.00	24.00	581.91	582.05
3AI	55+61.99	12.51	581.43	581.60	3AI	55+61.99	20.82	581.55	581.73	3AI	55+62.00	24.00	581.60	581.77
3AJ	55+71.99	12.59	581.12	581.32	3AJ	55+71.99	20.98	581.25	581.45	3AJ	55+72.00	24.00	581.29	581.49
3AK	55+81.99	12.67	580.82	581.03	3AK	55+81.99	21.13	580.94	581.16	3AK	55+82.00	24.00	580.99	581.20
3AL	55+91.99	12.75	580.51	580.73	3AL	55+91.99	21.28	580.64	580.86	3AL	55+92.00	24.00	580.68	580.90
3AM	56+01.99	12.83	580.21	580.43	3AM	56+01.99	21.44	580.33	580.56	3AM	56+02.00	24.00	580.37	580.60
3AN	56+11.99	12.91	579.90	580.12	3AN	56+11.98	21.59	580.03	580.25	3AN	56+12.00	24.00	580.07	580.29
3AO	56+21.99	12.99	579.59	579.81	3AO	56+21.98	21.75	579.73	579.94	3AO	56+22.00	24.00	579.76	579.97
3AP	56+31.99	13.07	579.29	579.49	3AP	56+31.98	21.90	579.42	579.62	3AP	56+32.00	24.00	579.45	579.65
3AQ	56+41.99	13.15	578.99	579.16	3AQ	56+41.98	22.05	579.13	579.30	3AQ	56+42.00	24.00	579.16	579.34
3AR	56+51.99	13.23	578.68	578.83	3AR	56+51.98	22.21	578.83	578.98	3AR	56+52.00	24.00	578.88	579.02
3AS	56+61.99	13.31	578.38	578.49	3AS	56+61.98	22.36	578.56	578.67	3AS	56+62.00	24.00	578.60	578.70
3AT	56+71.99	13.39	578.09	578.16	3AT	56+71.98	22.52	578.29	578.35	3AT	56+72.00	24.00	578.32	578.38
☐ W. BRG. PIER 8EB	56+80.91	13.46	577.84	577.86	☐ W. BRG. PIER 8EB	56+80.91	22.65	578.04	578.07	☐ W. BRG. PIER 8EB	56+80.91	24.00	578.08	578.10
☐ PIER 8 EB	56+82.12	13.47	577.80	577.82	☐ PIER 8 EB	56+82.12	22.67	578.01	578.03	☐ PIER 8 EB	56+82.12	24.00	578.04	578.06

- NOTES:
- All Elevations and Offsets are in feet.
 - Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 3 - UNIT 3 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-76 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	657
		PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

Model Default:
FILE NAME: p:\proj\transys\transys\corp\pw\labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structure\0998309-8325-5249-DEE306.dgn

BEAM E6				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	28.00	593.08	593.10
☐ E BRG. PIER 5 EB	51+86.87	28.00	593.03	593.05
3A	51+96.87	28.00	592.73	592.80
3B	52+06.87	28.00	592.43	592.54
3C	52+16.87	28.00	592.12	592.27
3D	52+26.87	28.00	591.81	591.99
3E	52+36.87	28.00	591.51	591.71
3F	52+46.87	28.00	591.20	591.42
3G	52+56.87	28.00	590.89	591.13
3H	52+66.87	28.00	590.59	590.83
3I	52+76.87	28.00	590.28	590.51
3J	52+86.87	28.00	589.97	590.20
3K	52+96.87	28.00	589.67	589.88
3L	53+06.87	28.00	589.36	589.55
3M	53+16.87	28.00	589.05	589.21
3N	53+26.87	28.00	588.75	588.87
3O	53+36.87	28.00	588.44	588.52
☐ W BRG PIER 6 EB	53+48.75	28.00	588.08	588.10
☐ PIER 6 EB	53+49.87	28.00	588.04	588.06
☐ E BRG PIER 6 EB	53+51.00	28.00	588.01	588.03
3P	53+60.99	28.01	587.70	587.78
3Q	53+70.99	28.02	587.39	587.52
3R	53+80.99	28.04	587.09	587.26
3S	53+90.99	28.05	586.78	586.99
3T	54+00.99	28.06	586.47	586.71
3U	54+10.99	28.07	586.17	586.42
3V	54+20.99	28.08	585.86	586.13
3W	54+30.99	28.09	585.55	585.83
3X	54+40.99	28.11	585.25	585.52
3Y	54+50.99	28.12	584.94	585.21
3Z	54+60.99	28.13	584.63	584.89
3AA	54+70.99	28.14	584.33	584.56
3AB	54+80.99	28.15	584.02	584.22
3AC	54+90.99	28.17	583.71	583.88
3AD	55+00.99	28.18	583.41	583.53
3AE	55+10.99	28.19	583.10	583.17
☐ W. BRG. PIER 7 EB	55+19.75	28.20	582.83	582.85
☐ PIER 7 EB	55+20.87	28.20	582.80	582.82
☐ E. BRG. PIER 7 EB	55+22.00	28.22	582.76	582.78
3AF	55+31.99	28.45	582.45	582.52
3AG	55+41.99	28.68	582.14	582.25
3AH	55+51.99	28.91	581.83	581.98
3AI	55+61.98	29.14	581.53	581.71
3AJ	55+71.98	29.36	581.24	581.44
3AK	55+81.98	29.59	580.96	581.17
3AL	55+91.98	29.82	580.67	580.89
3AM	56+01.97	30.05	580.39	580.62
3AN	56+11.97	30.28	580.11	580.33
3AO	56+21.97	30.50	579.83	580.04
3AP	56+31.97	30.73	579.55	579.74
3AQ	56+41.96	30.96	579.28	579.45
3AR	56+51.96	31.19	579.01	579.15
3AS	56+61.96	31.42	578.75	578.85
3AT	56+71.96	31.64	578.49	578.55
☐ W. BRG. PIER 8EB	56+80.91	31.85	578.25	578.27
☐ PIER 8 EB	56+82.12	31.88	578.22	578.24

BEAM E7				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	35.63	592.97	592.99
☐ E BRG. PIER 5 EB	51+86.87	35.63	592.92	592.94
3A	51+96.87	35.63	592.62	592.69
3B	52+06.87	35.63	592.31	592.43
3C	52+16.87	35.63	592.00	592.16
3D	52+26.87	35.63	591.70	591.88
3E	52+36.87	35.63	591.39	591.60
3F	52+46.87	35.63	591.08	591.31
3G	52+56.87	35.63	590.78	591.01
3H	52+66.87	35.63	590.47	590.71
3I	52+76.87	35.63	590.17	590.40
3J	52+86.87	35.63	589.86	590.08
3K	52+96.87	35.63	589.55	589.76
3L	53+06.87	35.63	589.25	589.43
3M	53+16.87	35.63	588.94	589.10
3N	53+26.87	35.63	588.63	588.75
3O	53+36.87	35.63	588.33	588.40
☐ W BRG PIER 6 EB	53+48.75	35.63	587.96	587.98
☐ PIER 6 EB	53+49.87	35.63	587.93	587.95
☐ E BRG PIER 6 EB	53+51.00	35.63	587.89	587.91
3P	53+60.99	35.66	587.59	587.66
3Q	53+70.99	35.69	587.28	587.41
3R	53+80.99	35.73	586.97	587.14
3S	53+90.99	35.76	586.66	586.87
3T	54+00.99	35.80	586.36	586.60
3U	54+10.99	35.83	586.05	586.31
3V	54+20.99	35.87	585.74	586.02
3W	54+30.99	35.90	585.44	585.71
3X	54+40.99	35.94	585.13	585.41
3Y	54+50.99	35.97	584.82	585.09
3Z	54+60.99	36.01	584.51	584.77
3AA	54+70.99	36.04	584.21	584.44
3AB	54+80.99	36.07	583.90	584.10
3AC	54+90.99	36.11	583.59	583.76
3AD	55+00.99	36.14	583.29	583.41
3AE	55+10.99	36.18	582.98	583.05
☐ W. BRG. PIER 7 EB	55+19.75	36.21	582.71	582.73
☐ PIER 7 EB	55+20.87	36.21	582.68	582.70
☐ E. BRG. PIER 7 EB	55+22.00	36.24	582.64	582.66
3AF	55+31.99	36.55	582.33	582.40
3AG	55+41.99	36.85	582.02	582.13
3AH	55+51.98	37.15	581.70	581.85
3AI	55+61.98	37.45	581.41	581.59
3AJ	55+71.97	37.75	581.15	581.35
3AK	55+81.97	38.06	580.88	581.10
3AL	55+91.96	38.36	580.61	580.84
3AM	56+01.96	38.66	580.35	580.58
3AN	56+11.95	38.96	580.08	580.31
3AO	56+21.95	39.26	579.82	580.03
3AP	56+31.94	39.57	579.55	579.75
3AQ	56+41.94	39.87	579.28	579.46
3AR	56+51.94	40.17	579.02	579.16
3AS	56+61.93	40.47	578.75	578.86
3AT	56+71.93	40.77	578.48	578.55
☐ W. BRG. PIER 8EB	56+80.91	41.04	578.24	578.26
☐ PIER 8 EB	56+82.12	41.08	578.21	578.23

SOUTH EDGE OF SOUTH LANE - EB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	36.00	592.96	592.98
☐ E BRG. PIER 5 EB	51+86.87	36.00	592.91	592.93
3A	51+96.87	36.00	592.61	592.68
3B	52+06.87	36.00	592.31	592.42
3C	52+16.87	36.00	592.00	592.15
3D	52+26.87	36.00	591.69	591.87
3E	52+36.87	36.00	591.39	591.59
3F	52+46.87	36.00	591.08	591.30
3G	52+56.87	36.00	590.77	591.01
3H	52+66.87	36.00	590.47	590.71
3I	52+76.87	36.00	590.16	590.39
3J	52+86.87	36.00	589.85	590.08
3K	52+96.87	36.00	589.55	589.76
3L	53+06.87	36.00	589.24	589.43
3M	53+16.87	36.00	588.93	589.09
3N	53+26.87	36.00	588.63	588.75
3O	53+36.87	36.00	588.32	588.40
☐ W BRG PIER 6 EB	53+48.75	36.00	587.96	587.98
☐ PIER 6 EB	53+49.87	36.00	587.92	587.94
☐ E BRG PIER 6 EB	53+51.00	36.00	587.89	587.91
3P	53+61.00	36.00	587.58	587.66
3Q	53+71.00	36.00	587.27	587.40
3R	53+81.00	36.00	586.97	587.14
3S	53+91.00	36.00	586.66	586.87
3T	54+01.00	36.00	586.35	586.59
3U	54+11.00	36.00	586.05	586.30
3V	54+21.00	36.00	585.74	586.01
3W	54+31.00	36.00	585.43	585.71
3X	54+41.00	36.00	585.13	585.41
3Y	54+51.00	36.00	584.82	585.09
3Z	54+61.00	36.00	584.52	584.77
3AA	54+71.00	36.00	584.21	584.44
3AB	54+81.00	36.00	583.90	584.10
3AC	54+91.00	36.00	583.60	583.76
3AD	55+01.00	36.00	583.29	583.41
3AE	55+11.00	36.00	582.98	583.05
☐ W. BRG. PIER 7 EB	55+19.75	36.00	582.71	582.73
☐ PIER 7 EB	55+20.87	36.00	582.68	582.70
☐ E. BRG. PIER 7 EB	55+22.00	36.00	582.65	582.67
3AF	55+32.00	36.00	582.34	582.41
3AG	55+42.00	36.00	582.03	582.14
3AH	55+52.00	36.00	581.73	581.87
3AI	55+62.00	36.00	581.44	581.62
3AJ	55+72.00	36.00	581.18	581.38
3AK	55+82.00	36.00	580.92	581.14
3AL	55+92.00	36.00	580.66	580.88
3AM	56+02.00	36.00	580.40	580.63
3AN	56+12.00	36.00	580.14	580.36
3AO	56+22.00	36.00	579.88	580.09
3AP	56+32.00	36.00	579.62	579.82
3AQ	56+42.00	36.00	579.36	579.53
3AR	56+52.00	36.00	579.10	579.24
3AS	56+62.00	36.00	578.84	578.94
3AT	56+72.00	36.00	578.58	578.64
☐ W. BRG. PIER 8EB	56+80.91	36.00	578.35	578.37
☐ PIER 8 EB	56+82.12	36.00	578.31	578.34

NOTES:

- All Elevations and Offsets are in feet.
- Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 4 - UNIT 3 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-77 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			CHECKED - PJL	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	658
		PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\proj\transys\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CH401\0998309-42R23-5250-DEE307.dgn

RAMP A				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
PIER 5 EB	-	-	-	-
E BRG. PIER 5 EB	-	-	-	-
3A	-	-	-	-
3B	-	-	-	-
3C	-	-	-	-
3D	-	-	-	-
3E	-	-	-	-
3F	-	-	-	-
3G	-	-	-	-
3H	-	-	-	-
3I	-	-	-	-
3J	-	-	-	-
3K	-	-	-	-
3L	-	-	-	-
3M	-	-	-	-
3N	-	-	-	-
3O	-	-	-	-
W BRG PIER 6 EB	-	-	-	-
PIER 6 EB	-	-	-	-
E BRG PIER 6 EB	-	-	-	-
3P	-	-	-	-
3Q	-	-	-	-
3R	-	-	-	-
3S	-	-	-	-
3T	-	-	-	-
3U	-	-	-	-
3V	-	-	-	-
3W	-	-	-	-
3X	-	-	-	-
3Y	54+50.86	36.05	584.82	585.10
3Z	54+60.84	36.57	584.51	584.77
3AA	54+70.83	37.09	584.19	584.43
3AB	54+80.82	37.62	583.88	584.08
3AC	54+90.80	38.14	583.56	583.72
3AD	55+00.79	38.66	583.24	583.36
3AE	55+10.78	39.19	582.93	582.99
W. BRG. PIER 7 EB	55+19.75	39.66	582.64	582.66
PIER 7 EB	55+20.87	39.71	582.61	582.63
E. BRG. PIER 7 EB	55+22.00	39.77	582.57	582.59
3AF	55+31.98	40.30	582.25	582.32
3AG	55+41.97	40.82	581.94	582.05
3AH	55+51.95	41.34	581.62	581.78
3AI	55+61.94	41.87	581.33	581.52
3AJ	55+71.93	42.39	581.06	581.27
3AK	55+81.91	42.91	580.78	581.02
3AL	55+91.90	43.44	580.51	580.76
3AM	56+01.89	43.96	580.24	580.50
3AN	56+11.87	44.48	579.97	580.22
3AO	56+21.86	45.01	579.70	579.94
3AP	56+31.84	45.53	579.43	579.65
3AQ	56+41.83	46.05	579.16	579.36
3AR	56+51.82	46.58	578.89	579.05
3AS	56+61.80	47.10	578.62	578.74
3AT	56+71.79	47.62	578.35	578.42
W. BRG. PIER 8EB	56+80.91	48.10	578.09	578.11
PIER 8 EB	56+82.12	48.16	578.05	578.07

BEAM E8				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
PIER 5 EB	51+85.12	43.25	592.82	592.84
E BRG. PIER 5 EB	51+86.87	43.25	592.77	592.79
3A	51+96.87	43.25	592.46	592.54
3B	52+06.87	43.25	592.16	592.29
3C	52+16.87	43.25	591.85	592.02
3D	52+26.87	43.25	591.55	591.75
3E	52+36.87	43.25	591.24	591.47
3F	52+46.87	43.25	590.93	591.18
3G	52+56.87	43.25	590.63	590.89
3H	52+66.87	43.25	590.32	590.59
3I	52+76.87	43.25	590.01	590.27
3J	52+86.87	43.25	589.71	589.95
3K	52+96.87	43.25	589.40	589.63
3L	53+06.87	43.25	589.09	589.30
3M	53+16.87	43.25	588.79	588.96
3N	53+26.87	43.25	588.48	588.61
3O	53+36.87	43.25	588.18	588.26
W BRG PIER 6 EB	53+48.75	43.25	587.81	587.83
PIER 6 EB	53+49.87	43.25	587.78	587.80
E BRG PIER 6 EB	53+51.00	43.25	587.74	587.76
3P	53+60.99	43.31	587.43	587.51
3Q	53+70.99	43.36	587.13	587.25
3R	53+80.99	43.42	586.82	586.99
3S	53+90.99	43.48	586.51	586.72
3T	54+00.99	43.54	586.20	586.45
3U	54+10.99	43.59	585.90	586.16
3V	54+20.99	43.65	585.59	585.87
3W	54+30.99	43.71	585.28	585.57
3X	54+40.99	43.77	584.97	585.26
3Y	54+50.99	43.82	584.65	584.93
3Z	54+60.99	43.88	584.35	584.61
3AA	54+70.99	43.94	584.04	584.28
3AB	54+80.99	44.00	583.73	583.94
3AC	54+90.99	44.05	583.43	583.59
3AD	55+00.99	44.11	583.12	583.24
3AE	55+10.99	44.17	582.81	582.88
W. BRG. PIER 7 EB	55+19.75	44.22	582.54	582.56
PIER 7 EB	55+20.87	44.22	582.51	582.53
E. BRG. PIER 7 EB	55+22.00	44.26	582.47	582.49
3AF	55+31.99	44.64	582.16	582.23
3AG	55+41.98	45.01	581.85	581.96
3AH	55+51.97	45.39	581.53	581.69
3AI	55+61.97	45.77	581.24	581.43
3AJ	55+71.96	46.14	580.97	581.19
3AK	55+81.95	46.52	580.71	580.94
3AL	55+91.95	46.89	580.44	580.69
3AM	56+01.94	47.27	580.17	580.43
3AN	56+11.93	47.65	579.90	580.15
3AO	56+21.92	48.02	579.64	579.88
3AP	56+31.92	48.40	579.37	579.59
3AQ	56+41.91	48.77	579.10	579.29
3AR	56+51.90	49.15	578.83	578.99
3AS	56+61.90	49.52	578.57	578.68
3AT	56+71.89	49.90	578.30	578.37
W. BRG. PIER 8EB	56+80.91	50.24	578.04	578.06
PIER 8 EB	56+82.12	50.28	578.01	578.03

BEAM E9				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
PIER 5 EB	51+85.12	50.88	592.67	592.69
E BRG. PIER 5 EB	51+86.87	50.88	592.61	592.63
3A	51+96.87	50.88	592.31	592.39
3B	52+06.87	50.88	592.01	592.13
3C	52+16.87	50.88	591.70	591.87
3D	52+26.87	50.88	591.39	591.60
3E	52+36.87	50.88	591.09	591.32
3F	52+46.87	50.88	590.78	591.03
3G	52+56.87	50.88	590.48	590.73
3H	52+66.87	50.88	590.17	590.43
3I	52+76.87	50.88	589.86	590.12
3J	52+86.87	50.88	589.56	589.80
3K	52+96.87	50.88	589.25	589.48
3L	53+06.87	50.88	588.94	589.14
3M	53+16.87	50.88	588.64	588.80
3N	53+26.87	50.88	588.33	588.46
3O	53+36.87	50.88	588.02	588.10
W BRG PIER 6 EB	53+48.75	50.88	587.66	587.68
PIER 6 EB	53+49.87	50.88	587.62	587.65
E BRG PIER 6 EB	53+51.00	50.88	587.59	587.61
3P	53+60.99	50.96	587.28	587.36
3Q	53+70.99	51.04	586.97	587.10
3R	53+80.99	51.12	586.67	586.84
3S	53+90.99	51.20	586.36	586.57
3T	54+00.99	51.28	586.05	586.29
3U	54+10.99	51.36	585.74	586.00
3V	54+20.99	51.44	585.43	585.71
3W	54+30.99	51.52	585.12	585.41
3X	54+40.99	51.60	584.82	585.10
3Y	54+50.99	51.68	584.48	584.76
3Z	54+60.99	51.76	584.18	584.44
3AA	54+70.99	51.84	583.87	584.11
3AB	54+80.99	51.92	583.56	583.77
3AC	54+90.99	52.00	583.25	583.42
3AD	55+00.99	52.08	582.95	583.07
3AE	55+10.99	52.16	582.64	582.71
W. BRG. PIER 7 EB	55+19.75	52.23	582.37	582.39
PIER 7 EB	55+20.87	52.23	582.34	582.36
E. BRG. PIER 7 EB	55+22.00	52.28	582.30	582.32
3AF	55+31.98	52.73	581.98	582.06
3AG	55+41.97	53.18	581.67	581.79
3AH	55+51.96	53.63	581.35	581.51
3AI	55+61.95	54.08	581.06	581.25
3AJ	55+71.94	54.53	580.79	581.01
3AK	55+81.93	54.98	580.52	580.76
3AL	55+91.92	55.43	580.25	580.50
3AM	56+01.91	55.88	579.99	580.24
3AN	56+11.90	56.33	579.72	579.97
3AO	56+21.89	56.78	579.45	579.69
3AP	56+31.88	57.23	579.18	579.40
3AQ	56+41.87	57.68	578.91	579.10
3AR	56+51.86	58.13	578.64	578.80
3AS	56+61.85	58.58	578.37	578.49
3AT	56+71.84	59.03	578.10	578.17
W. BRG. PIER 8EB	56+80.91	59.43	577.84	577.86
PIER 8 EB	56+82.12	59.49	577.81	577.83

NOTES:

- All Elevations and Offsets are in feet.
- Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

	WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 5 - UNIT 3 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-78 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		CHECKED - PJL		REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	659
		PLOT SCALE = 0.167 ' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
		PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

Model Default: p:\projects\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1_Sheets\Structure\0998309-8323-5231-DEE-308.dgn
FILE NAME: p:\projects\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1_Sheets\Structure\0998309-8323-5231-DEE-308.dgn

BEAM E10				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	58.50	592.51	592.53
☐ E BRG. PIER 5 EB	51+86.87	58.50	592.46	592.48
3A	51+96.87	58.50	592.16	592.24
3B	52+06.87	58.50	591.86	591.99
3C	52+16.87	58.50	591.55	591.74
3D	52+26.87	58.50	591.24	591.47
3E	52+36.87	58.50	590.94	591.19
3F	52+46.87	58.50	590.63	590.91
3G	52+56.87	58.50	590.32	590.61
3H	52+66.87	58.50	590.02	590.31
3I	52+76.87	58.50	589.71	590.00
3J	52+86.87	58.50	589.40	589.68
3K	52+96.87	58.50	589.10	589.35
3L	53+06.87	58.50	588.79	589.01
3M	53+16.87	58.50	588.48	588.67
3N	53+26.87	58.50	588.18	588.32
3O	53+36.87	58.50	587.87	587.96
☐ W BRG PIER 6 EB	53+48.75	58.50	587.51	587.53
☐ PIER 6 EB	53+49.87	58.50	587.47	587.49
☐ E BRG PIER 6 EB	53+51.00	58.51	587.44	587.46
3P	53+60.99	58.61	587.13	587.21
3Q	53+70.99	58.72	586.82	586.96
3R	53+80.99	58.82	586.51	586.70
3S	53+90.99	58.92	586.20	586.43
3T	54+00.99	59.02	585.89	586.16
3U	54+10.99	59.12	585.59	585.88
3V	54+20.99	59.23	585.28	585.59
3W	54+30.99	59.33	584.97	585.28
3X	54+40.99	59.43	584.66	584.97
3Y	54+50.99	59.53	584.31	584.62
3Z	54+60.99	59.63	584.01	584.29
3AA	54+70.99	59.74	583.70	583.96
3AB	54+80.99	59.84	583.39	583.62
3AC	54+90.99	59.94	583.08	583.27
3AD	55+00.99	60.04	582.77	582.91
3AE	55+10.99	60.15	582.47	582.54
☐ W. BRG. PIER 7 EB	55+19.75	60.23	582.20	582.22
☐ PIER 7 EB	55+20.87	60.24	582.16	582.18
☐ E. BRG. PIER 7 EB	55+22.00	60.30	582.13	582.15
3AF	55+31.98	60.82	581.81	581.89
3AG	55+41.97	61.35	581.49	581.62
3AH	55+51.95	61.87	581.18	581.35
3AI	55+61.94	62.39	580.88	581.09
3AJ	55+71.93	62.92	580.61	580.85
3AK	55+81.91	63.44	580.34	580.60
3AL	55+91.90	63.96	580.07	580.34
3AM	56+01.89	64.49	579.80	580.08
3AN	56+11.87	65.01	579.53	579.80
3AO	56+21.86	65.53	579.26	579.52
3AP	56+31.84	66.06	578.99	579.23
3AQ	56+41.83	66.58	578.72	578.93
3AR	56+51.82	67.10	578.45	578.62
3AS	56+61.80	67.63	578.18	578.31
3AT	56+71.79	68.15	577.91	577.98
☐ W. BRG. PIER 8EB	56+80.91	68.63	577.64	577.66
☐ PIER 8 EB	56+82.12	68.69	577.61	577.63

INSIDE FACE OF SOUTH PARAPET - EB				
Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 5 EB	51+85.12	60.00	592.48	592.50
☐ E BRG. PIER 5 EB	51+86.87	60.00	592.43	592.45
3A	51+96.87	60.00	592.13	592.21
3B	52+06.87	60.00	591.83	591.96
3C	52+16.87	60.00	591.52	591.71
3D	52+26.87	60.00	591.21	591.44
3E	52+36.87	60.00	590.91	591.16
3F	52+46.87	60.00	590.60	590.88
3G	52+56.87	60.00	590.29	590.58
3H	52+66.87	60.00	589.99	590.28
3I	52+76.87	60.00	589.68	589.97
3J	52+86.87	60.00	589.37	589.65
3K	52+96.87	60.00	589.07	589.32
3L	53+06.87	60.00	588.76	588.98
3M	53+16.87	60.00	588.45	588.64
3N	53+26.87	60.00	588.15	588.29
3O	53+36.87	60.00	587.84	587.93
☐ W BRG PIER 6 EB	53+48.75	60.00	587.48	587.50
☐ PIER 6 EB	53+49.87	60.00	587.44	587.46
☐ E BRG PIER 6 EB	53+51.00	60.01	587.41	587.43
3P	53+60.99	60.11	587.10	587.18
3Q	53+70.99	60.22	586.79	586.93
3R	53+80.99	60.32	586.48	586.67
3S	53+90.99	60.42	586.17	586.40
3T	54+00.99	60.52	585.86	586.13
3U	54+10.99	60.62	585.56	585.85
3V	54+20.99	60.73	585.25	585.56
3W	54+30.99	60.83	584.94	585.25
3X	54+40.99	60.93	584.63	584.94
3Y	54+50.99	61.03	584.28	584.59
3Z	54+60.99	61.13	583.97	584.26
3AA	54+70.99	61.24	583.67	583.93
3AB	54+80.99	61.34	583.36	583.58
3AC	54+90.99	61.44	583.05	583.23
3AD	55+00.99	61.54	582.74	582.88
3AE	55+10.99	61.65	582.43	582.51
☐ W. BRG. PIER 7 EB	55+19.75	61.74	582.16	582.18
☐ PIER 7 EB	55+20.87	61.75	582.13	582.15
☐ E. BRG. PIER 7 EB	55+22.00	61.81	582.09	582.11
3AF	55+31.98	62.33	581.78	581.85
3AG	55+41.97	62.85	581.46	581.59
3AH	55+51.95	63.38	581.14	581.31
3AI	55+61.94	63.90	580.85	581.06
3AJ	55+71.93	64.42	580.58	580.82
3AK	55+81.91	64.94	580.31	580.57
3AL	55+91.90	65.47	580.04	580.31
3AM	56+01.89	65.99	579.77	580.04
3AN	56+11.87	66.51	579.50	579.77
3AO	56+21.86	67.04	579.23	579.49
3AP	56+31.84	67.56	578.96	579.20
3AQ	56+41.83	68.08	578.69	578.89
3AR	56+51.82	68.61	578.42	578.59
3AS	56+61.80	69.13	578.14	578.27
3AT	56+71.79	69.65	577.87	577.95
☐ W. BRG. PIER 8EB	56+80.91	70.13	577.61	577.63
☐ PIER 8 EB	56+82.12	70.20	577.58	577.60

- NOTES:
- All Elevations and Offsets are in feet.
 - Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\projects\trans\systems\pwr\unit3\unit3.dwg
PROJECTS: 2018\CH4001\401180022\03-WSP\CD\62023-RB-1\Sheet\Structure\0998309-42R23-5252-DEW401.dwg

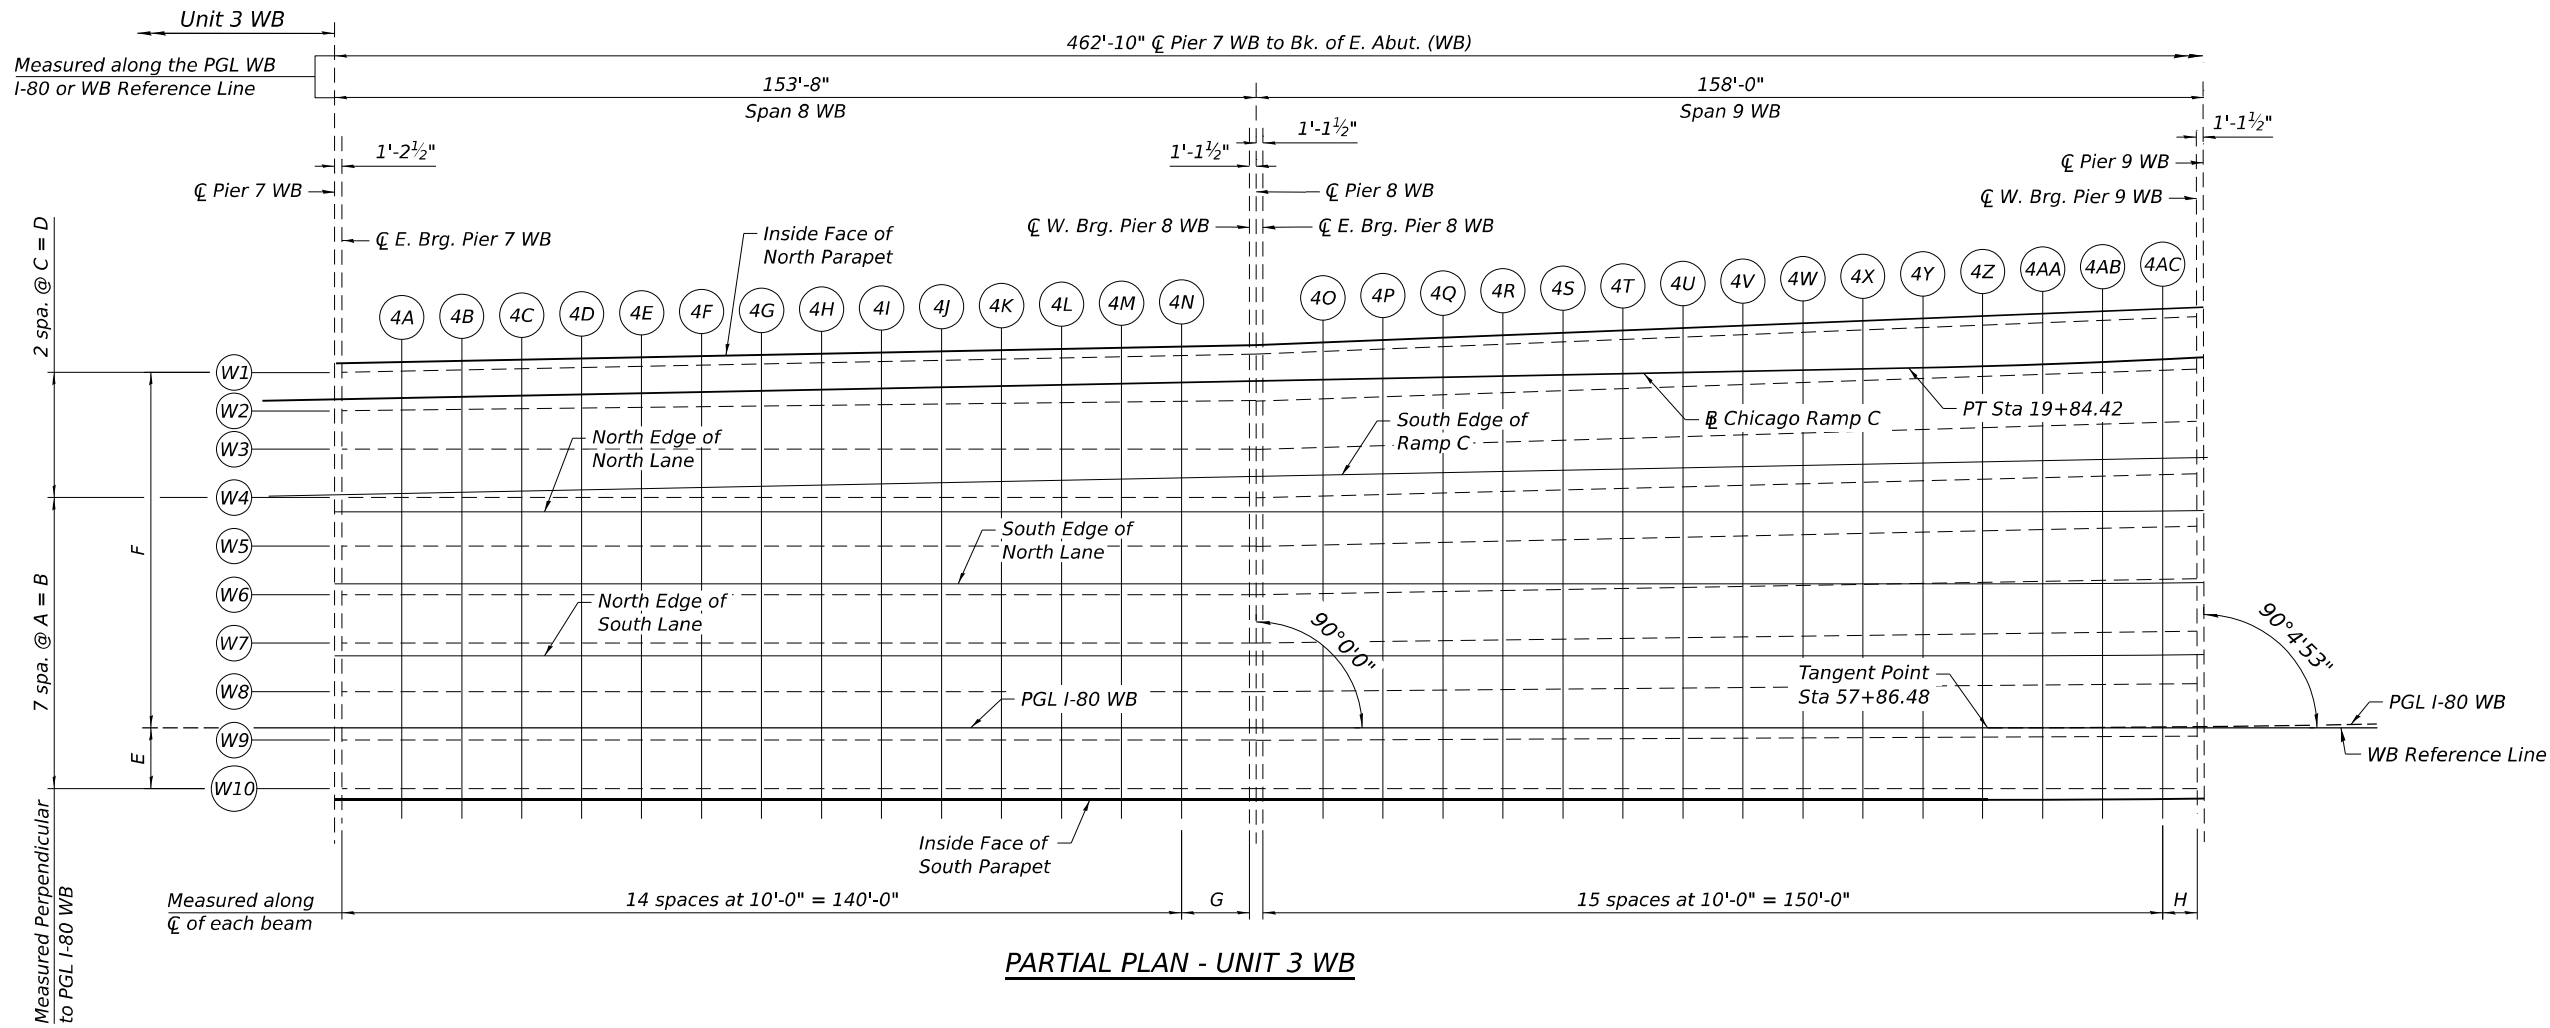


TABLE OF BEAM LENGTHS

LOCATION	U	V	W	X	Y	Z
Beam W1	37' - 10 1/16" (+)	151' - 4 5/16"	38' - 11 5/16" (+)	155' - 9 5/16"	35' - 8 5/8" (+)	142' - 10 9/16"
Beam W2	37' - 10" (+)	151' - 4 1/16"	38' - 11 1/4" (+)	155' - 9 1/16"	35' - 10"	143' - 4"
Beam W3	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 15/16"	35' - 11 3/8" (+)	143' - 9 9/16"
Beam W4	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 7/8"	36' - 0 3/4" (+)	144' - 3 3/16"
Beam W5	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 7/8"	36' - 2 1/4" (-)	144' - 8 7/8"
Beam W6	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 7/8"	36' - 3 5/8" (+)	145' - 2 5/8"
Beam W7	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 7/8"	36' - 5 1/8"	145' - 8 1/2"
Beam W8	37' - 10"	151' - 4"	38' - 11 1/4" (-)	155' - 8 15/16"	36' - 6 5/8"	146' - 2 1/2"
Beam W9	37' - 10"	151' - 4"	38' - 11 1/4" (+)	155' - 9 1/16"	36' - 8 1/8"	146' - 8 1/2"
Beam W10	37' - 10"	151' - 4"	38' - 11 5/16" (-)	155' - 9 3/16"	36' - 9 5/8" (+)	147' - 2 5/8"

TABLE OF BEAM LENGTHS

LOCATION	G	H	I	J	K
Inside Face of North Parapet	11' - 4 5/16"	5' - 9 9/16"	13	130'-0"	12' - 9 9/16"
Beam W1	11' - 4 5/16"	5' - 9 5/16"	13	130'-0"	12' - 10 9/16"
Ramp C	11' - 4 5/16"	5' - 8 5/8"	13	130'-0"	13' - 4 9/16"
Beam W2	11' - 4 1/16"	5' - 9 1/16"	13	130'-0"	13' - 4"
Beam W3	11' - 4"	5' - 8 15/16"	13	130'-0"	13' - 9 9/16"
South Edge of Ramp C	11' - 4"	5' - 8 5/8"	13	130'-0"	14' - 3 1/8"
Beam W4	11' - 4"	5' - 8 7/8"	13	130'-0"	14' - 3 3/16"
North Edge of North Lane	11' - 4"	5' - 8 3/8"	13	130'-0"	14' - 7 3/4"
Beam W5	11' - 4"	5' - 8 7/8"	13	130'-0"	14' - 8 7/8"
South Edge of North Lane	11' - 4"	5' - 8 5/8"	13	140'-0"	5'-3 3/4"
Beam W6	11' - 4"	5' - 8 7/8"	14	140'-0"	5' - 2 5/8"
Beam W7	11' - 4"	5' - 8 7/8"	14	140'-0"	5' - 8 1/2"
North Edge of South Lane	11' - 4"	5' - 8 3/4"	14	140'-0"	5' - 11 11/16"
Beam W8	11' - 4"	5' - 8 15/16"	14	140'-0"	6' - 2 1/2"
PGL I-80 WB	11' - 4"	5' - 8 15/16"	14	140'-0"	6' - 7 5/8"
Beam W9	11' - 4"	5' - 9 1/16"	14	140'-0"	6' - 8 1/2"
Beam W10	11' - 4"	5' - 9 3/16"	14	140'-0"	7' - 2 5/8"
Inside Face of South Parapet	11' - 4"	5' - 9 3/16"	14	140'-0"	7' - 3 5/8"

TABLE OF BEAM SPACING

LOCATION	A	B	C	D	E	F
CL E BRG. PIER 7 WB	8' - 1"	56' - 7"	6' - 4 7/8"	12' - 9 3/4"	10' - 1 1/2"	59' - 3 1/4"
CL W BRG PIER 8 WB	8' - 1"	56' - 7"	7' - 11 1/16"	15' - 10 1/8"	10' - 1 1/2"	62' - 3 5/8"
CL E BRG PIER 8 WB	8' - 1"	56' - 7"	7' - 11 7/16"	15' - 10 7/8"	10' - 1 1/2"	62' - 4 3/8"
CL W BRG PIER 9 WB	8' - 8 15/16"	61' - 2 9/16"	8' - 8 15/16"	17' - 5 7/8"	10' - 3 11/16"	68' 4 3/4"
CL E BRG PIER 9 WB	8' - 9 1/8"	61' - 3 7/8"	8' - 9 1/8"	17' - 6 1/4"	10' - 4"	68' - 6 1/8"
CL BRG. E. ABUT. WB	9' - 9 1/8" (+)	68' - 4 3/16"	9' - 9 1/8" (+)	19' - 6 5/16"	11' - 3 3/16"	76' - 7 5/16"

NOTES:

- Up to 1/4 inch to be ground off the bridge deck and bridge approach slabs. The Profile Grade shows the final grade after grinding.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 32:0 "/in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS PLAN 1 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-80 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	661
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\proj\trans\systems-pw\unit4\unit4.dgn
PROJECT: 2018\CH4001\401180022\03-WSP\CD\62R23-RB-1\Sheet\Structure\0998309-42R23-S253-DEWB02.dgn

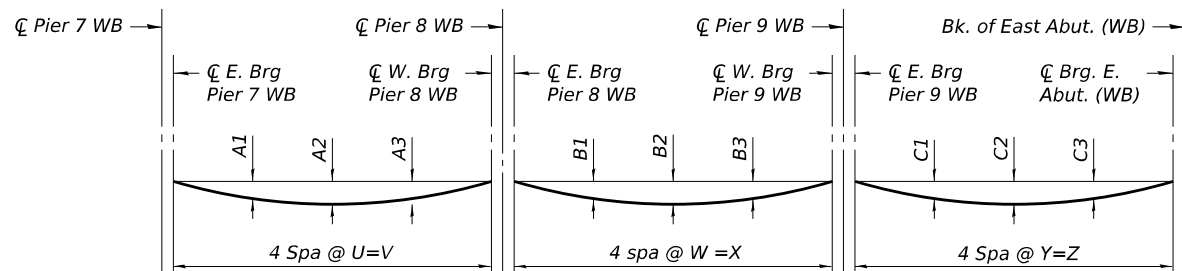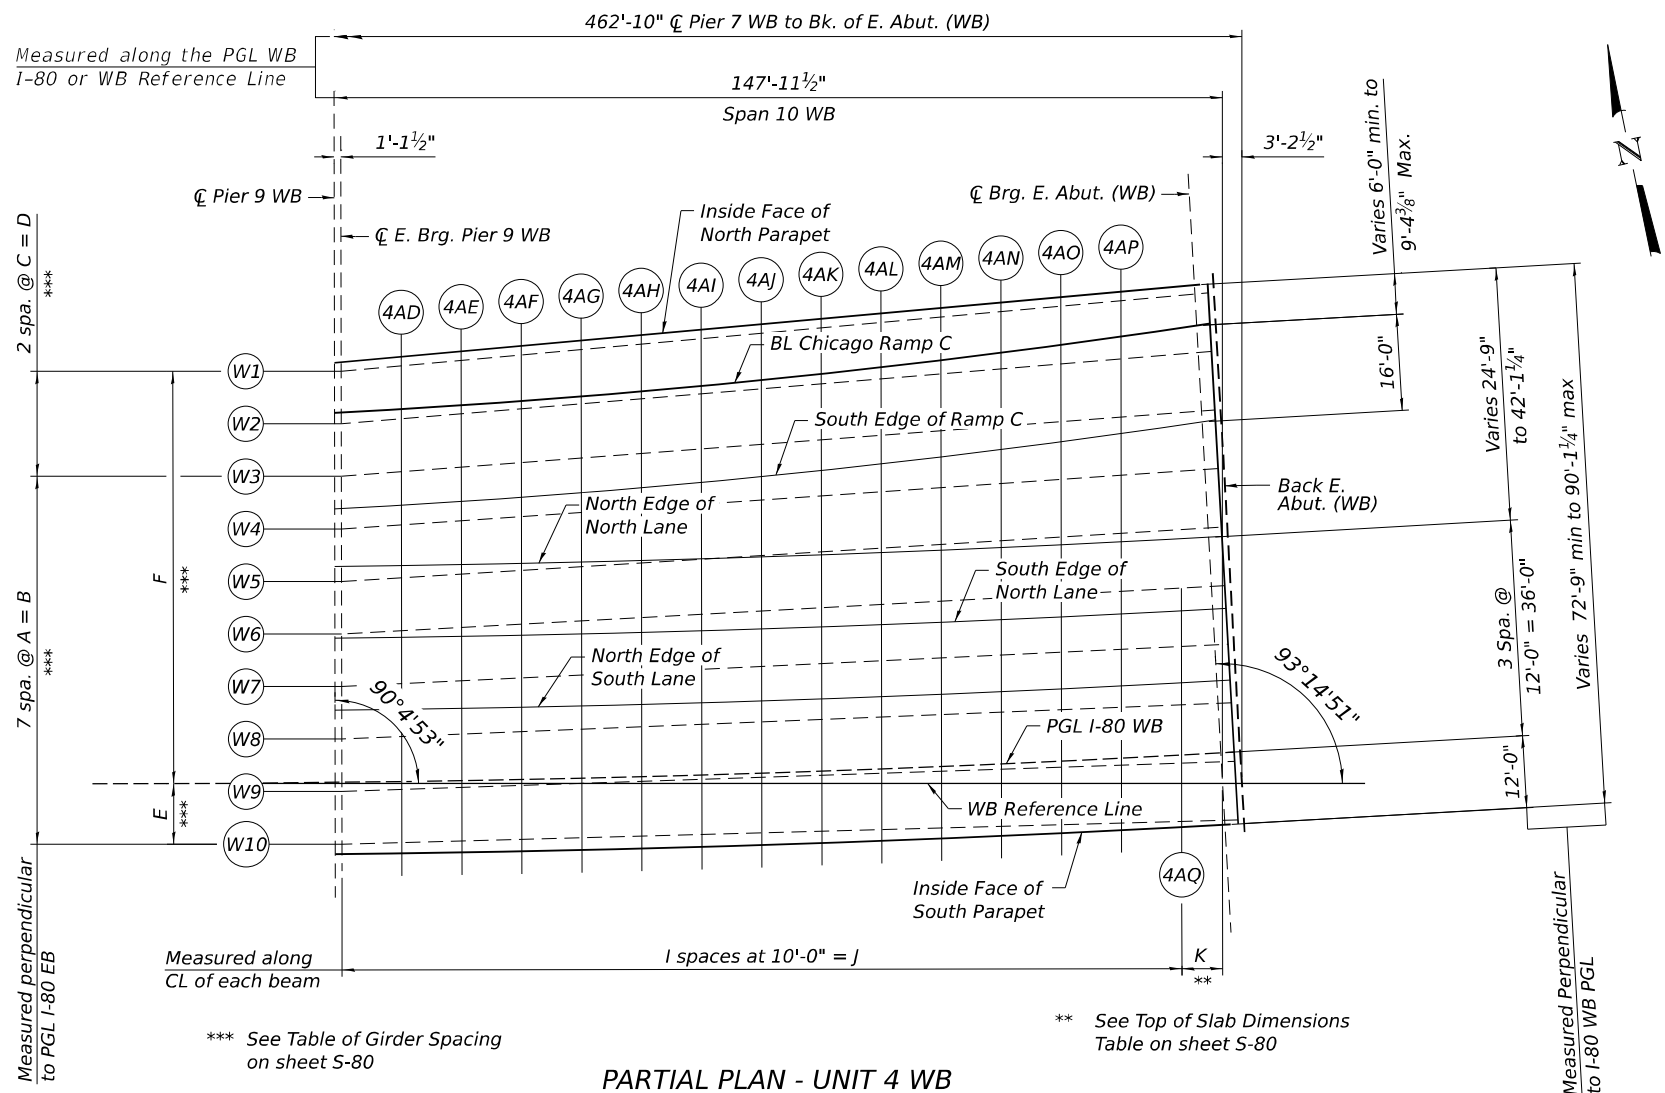


DEAD LOAD DEFLECTION DIAGRAM
(Includes weight of concrete, excluding beams)

Note:
The above deflections are not to be used in the field if the engineer is working from the grade elevations adjusted for dead load deflections and grinding as shown on sheets S-83 to S-87.

Beam	DEAD LOAD DEFLECTIONS (INCHES)								
	Span 8 WB			Span 9 WB			Span 10 WB		
	A1	A2	A3	B1	B2	B3	C1	C2	C3
W1	2 5/8	3 1/2	2 1/2	2 7/8	4	2 7/8	2 1/8	2 7/8	2 1/8
W2	2 1/2	3 3/8	2 3/8	2 3/8	2 5/8	2 5/8	1 7/8	2 5/8	2
W3	2 3/8	3 1/4	2 1/4	2 1/2	3 1/2	2 1/2	2	2 3/4	2
W4	2 1/8	2 7/8	2 1/8	2 5/8	3 5/8	2 5/8	1 7/8	2 1/2	1 7/8
W5	2 1/8	2 7/8	2 1/8	2 5/8	3 1/2	2 5/8	1 7/8	2 1/2	1 7/8
W6	2 1/8	2 7/8	2 1/8	2 5/8	3 1/2	2 5/8	1 7/8	2 1/2	1 7/8
W7	2 1/8	2 7/8	2 1/8	2 1/2	3 3/8	2 1/2	1 7/8	2 1/2	1 7/8
W8	2 1/4	3	2 1/4	2 1/2	3 3/8	2 1/2	1 7/8	2 5/8	2
W9	2 1/4	3	2 1/4	2 3/8	3 1/4	2 3/8	1 7/8	2 5/8	2
W10	2 1/8	2 7/8	2 1/8	2 3/8	3 1/8	2 3/8	1 7/8	2 5/8	2

PARTIAL PLAN - UNIT 4 WB



INMTERIOR BEAMS

EXTERIOR BEAMS

FILLET HEIGHTS

To determine "t": After all precast prestressed beams have been erected, elevations of the top flanges of the beams shall be taken at intervals shown. These elevations subtracted from the "Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding" shown on sheets S-83 to S-87, minus the initial slab thickness prior to grinding, equals the fillet heights "t" above top flange of beams.
The slab is to be ground after curing to achieve smoothness, but the slab is not to be ground to elevations below the "Theoretical Grade Elevations" shown on sheets S-83 to S-87. For grinding the deck, see Special Provisions.

NOTES:

- Up to 1/4 inch to be ground off the bridge deck and bridge approach slabs. The Profile Grade shows the final grade after grinding.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614
DESIGNED - LAS
CHECKED - PJL
PLOT SCALE = 32:0 "/ in.
PLOT DATE = 11/5/2025

DESIGNED - LAS
CHECKED - PJL
DRAWN - GM
CHECKED - LAS

REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS PLAN 2 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-81 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	662
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\proj\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structural\0998309-8325-5254-DEW\03.dgn

INSIDE FACE OF NORTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	-60.75	582.39	582.42
C E BRG. PIER 7 WB	55+12.08	-60.77	582.34	582.37
4A	55+22.08	-60.97	581.93	582.02
4B	55+32.08	-61.17	581.51	581.66
4C	55+42.08	-61.37	581.10	581.30
4D	55+52.08	-61.57	580.73	580.97
4E	55+62.07	-61.77	580.36	580.64
4F	55+72.07	-61.97	580.00	580.30
4G	55+82.07	-62.17	579.64	579.94
4H	55+92.07	-62.37	579.27	579.58
4I	56+02.07	-62.57	578.91	579.20
4J	56+12.06	-62.77	578.54	578.82
4K	56+22.06	-62.97	578.18	578.42
4L	56+32.06	-63.17	577.82	578.02
4M	56+42.06	-63.37	577.45	577.61
4N	56+52.06	-63.57	577.10	577.19
C W BRG PIER 8 WB	56+63.42	-63.80	576.69	576.71
C PIER 8 WB	56+64.55	-63.82	576.65	576.67
C E BRG PIER 8 WB	56+65.67	-63.87	576.61	576.63
4O	56+75.66	-64.27	576.25	576.34
4P	56+85.65	-64.67	575.89	576.05
4Q	56+95.65	-65.06	575.47	575.69
4R	57+05.64	-65.46	575.03	575.30
4S	57+15.63	-65.86	574.60	574.90
4T	57+25.62	-66.26	574.16	574.49
4U	57+35.61	-66.66	573.72	574.06
4V	57+45.61	-67.06	573.28	573.63
4W	57+55.60	-67.46	572.84	573.18
4X	57+65.59	-67.86	572.39	572.71
4Y	57+75.58	-68.26	571.94	572.24
4Z	57+85.57	-68.66	571.49	571.74
4AA	57+95.57	-69.04	571.04	571.24
4AB	58+05.57	-69.40	570.58	570.72
4AC	58+15.86	-69.72	570.13	570.19
C W BRG PIER 9 WB	58+21.80	-69.90	569.91	569.93
C PIER 9 WB	58+22.96	-69.93	569.86	569.89
C E BRG PIER 9 WB	58+24.11	-70.01	569.82	569.84
4AD	58+34.37	-70.79	569.41	569.49
4AE	58+44.64	-71.53	569.00	569.13
4AF	58+54.91	-72.24	568.60	568.77
4AG	58+65.18	-72.92	568.19	568.40
4AH	58+75.46	-73.57	567.79	568.02
4AI	58+85.75	-74.18	567.39	567.64
4AJ	58+96.04	-74.77	566.98	567.24
4AK	59+06.33	-75.33	566.58	566.84
4AL	59+16.62	-75.85	566.18	566.43
4AM	59+26.92	-76.34	565.78	566.01
4AN	59+37.23	-76.81	565.42	565.61
4AO	59+47.54	-77.24	565.08	565.23
4AP	59+57.85	-77.64	564.75	564.85
4AQ	-	-	-	-
C BRG. E. ABUT. WB	59+70.79	-78.10	564.33	564.35
C EXP. JT.	59+72.16	-78.15	564.29	564.31
BK E. ABUT. WB	59+74.36	-78.31	564.21	564.23

BEAM W1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	-59.25	582.43	582.45
C E BRG. PIER 7 WB	55+12.08	-59.27	582.38	582.40
4A	55+22.08	-59.47	581.96	582.05
4B	55+32.08	-59.67	581.54	581.69
4C	55+42.08	-59.87	581.13	581.33
4D	55+52.08	-60.07	580.76	581.00
4E	55+62.07	-60.27	580.39	580.67
4F	55+72.07	-60.47	580.03	580.33
4G	55+82.07	-60.67	579.67	579.97
4H	55+92.07	-60.87	579.30	579.61
4I	56+02.07	-61.07	578.94	579.23
4J	56+12.06	-61.27	578.57	578.85
4K	56+22.06	-61.47	578.21	578.45
4L	56+32.06	-61.67	577.85	578.05
4M	56+42.06	-61.87	577.48	577.64
4N	56+52.06	-62.07	577.13	577.22
C W BRG PIER 8 WB	56+63.42	-62.30	576.72	576.74
C PIER 8 WB	56+64.55	-62.33	576.68	576.70
C E BRG PIER 8 WB	56+65.67	-62.37	576.64	576.66
4O	56+75.66	-62.77	576.28	576.37
4P	56+85.65	-63.16	575.92	576.08
4Q	56+95.65	-63.56	575.50	575.72
4R	57+05.64	-63.96	575.07	575.33
4S	57+15.63	-64.36	574.63	574.94
4T	57+25.62	-64.76	574.20	574.53
4U	57+35.61	-65.16	573.77	574.11
4V	57+45.61	-65.56	573.33	573.68
4W	57+55.60	-65.96	572.89	573.23
4X	57+65.59	-66.36	572.46	572.78
4Y	57+75.58	-66.76	572.02	572.31
4Z	57+85.57	-67.16	571.57	571.82
4AA	57+95.57	-67.54	571.12	571.32
4AB	58+05.57	-67.90	570.67	570.81
4AC	58+15.85	-68.22	570.22	570.28
C W BRG PIER 9 WB	58+21.79	-68.40	570.00	570.02
C PIER 9 WB	58+22.95	-68.45	569.95	569.97
C E BRG PIER 9 WB	58+24.11	-68.51	569.91	569.93
4AD	58+34.36	-69.28	569.50	569.58
4AE	58+44.62	-70.02	569.09	569.22
4AF	58+54.89	-70.73	568.69	568.86
4AG	58+65.16	-71.41	568.28	568.49
4AH	58+75.43	-72.06	567.88	568.12
4AI	58+85.71	-72.68	567.48	567.73
4AJ	58+95.99	-73.26	567.08	567.34
4AK	59+06.28	-73.82	566.68	566.93
4AL	59+16.57	-74.35	566.28	566.52
4AM	59+26.87	-74.84	565.88	566.10
4AN	59+37.17	-75.30	565.51	565.70
4AO	59+47.47	-75.73	565.18	565.32
4AP	59+57.77	-76.14	564.84	564.94
4AQ	-	-	-	-
C BRG. E. ABUT. WB	59+70.79	-76.60	564.42	564.44
C EXP. JT.	59+72.17	-76.64	564.38	564.40
BK E. ABUT. WB	59+74.36	-76.72	564.31	564.33

B CHICAGO RAMP C

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	-54.75	582.52	582.54
C E BRG. PIER 7 WB	55+12.08	-54.77	582.47	582.49
4A	55+22.08	-54.97	582.05	582.14
4B	55+32.08	-55.17	581.64	581.78
4C	55+42.08	-55.37	581.22	581.42
4D	55+52.08	-55.57	580.85	581.09
4E	55+62.07	-55.77	580.49	580.75
4F	55+72.07	-55.97	580.12	580.41
4G	55+82.07	-56.17	579.76	580.05
4H	55+92.07	-56.37	579.40	579.69
4I	56+02.07	-56.57	579.03	579.32
4J	56+12.06	-56.77	578.67	578.93
4K	56+22.06	-56.97	578.30	578.54
4L	56+32.06	-57.17	577.94	578.14
4M	56+42.06	-57.37	577.58	577.72
4N	56+52.06	-57.57	577.22	577.31
C W BRG PIER 8 WB	56+63.42	-57.80	576.81	576.83
C PIER 8 WB	56+64.55	-57.82	576.77	576.79
C E BRG PIER 8 WB	56+65.67	-57.84	576.73	576.75
4O	56+75.67	-58.04	576.38	576.46
4P	56+85.67	-58.24	576.02	576.17
4Q	56+95.66	-58.44	575.62	575.82
4R	57+05.66	-58.64	575.21	575.45
4S	57+15.66	-58.84	574.80	575.08
4T	57+25.66	-59.04	574.39	574.69
4U	57+35.66	-59.24	573.98	574.30
4V	57+45.65	-59.44	573.57	573.89
4W	57+55.65	-59.64	573.16	573.47
4X	57+65.65	-59.84	572.75	573.04
4Y	57+75.65	-60.05	572.34	572.60
4Z	57+85.65	-60.29	571.92	572.15
4AA	57+95.64	-60.60	571.50	571.68
4AB	58+05.65	-60.94	571.07	571.20
4AC	58+15.90	-61.31	570.64	570.70
C W BRG PIER 9 WB	58+21.77	-61.54	570.42	570.44
C PIER 9 WB	58+22.92	-61.59	570.38	570.40
C E BRG PIER 9 WB	58+24.08	-61.63	570.33	570.36
4AD	58+34.33	-62.07	569.95	570.02
4AE	58+44.58	-62.55	569.56	569.68
4AF	58+54.84	-63.06	569.17	569.33
4AG	58+65.09	-63.60	568.77	568.97
4AH	58+75.34	-64.18	568.38	568.59
4AI	58+85.60	-64.80	567.98	568.21
4AJ	58+95.85	-65.45	567.57	567.81
4AK	59+06.10	-66.14	567.17	567.40
4AL	59+16.36	-66.87	566.76	566.98
4AM	59+26.61	-67.63	566.34	566.55
4AN	59+36.86	-68.42	565.96	566.13
4AO	59+47.11	-69.25	565.60	565.73
4AP	59+57.36	-70.12	565.23	565.33
4AQ	-	-	-	-
C BRG. E. ABUT. WB	59+70.82	-71.31	564.76	564.78
C EXP. JT.	59+72.19	-71.44	564.71	564.73
BK E. ABUT. WB	59+74.38	-71.64	564.63	564.65

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED -	LAS	REVISED -	
		CHECKED -	PJL	REVISED -	
PLOT SCALE	= 0.167 ' / in.	DRAWN -	GM	REVISED -	
PLOT DATE	= 11/5/2025	CHECKED -	LAS	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 1 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-82 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	663
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

Model: Default
File Name: p:\projects\trans\scorp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structure\0998309-8323-5245-DEW\04.dgn

BEAM W2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-52.85	582.56	582.58
⌀ E BRG. PIER 7 WB	55+12.08	-52.87	582.51	582.53
4A	55+22.08	-52.98	582.09	582.18
4B	55+32.08	-53.09	581.68	581.83
4C	55+42.08	-53.20	581.26	581.46
4D	55+52.08	-53.31	580.90	581.13
4E	55+62.08	-53.42	580.54	580.80
4F	55+72.08	-53.53	580.17	580.46
4G	55+82.08	-53.64	579.81	580.11
4H	55+92.08	-53.75	579.45	579.74
4I	56+02.08	-53.86	579.09	579.37
4J	56+12.08	-53.97	578.72	578.99
4K	56+22.08	-54.09	578.36	578.60
4L	56+32.08	-54.20	578.00	578.20
4M	56+42.08	-54.31	577.64	577.79
4N	56+52.08	-54.42	577.28	577.38
⌀ W BRG PIER 8 WB	56+63.42	-54.54	576.88	576.90
⌀ PIER 8 WB	56+64.55	-54.56	576.84	576.86
⌀ E BRG PIER 8 WB	56+65.67	-54.54	576.80	576.82
4O	56+75.66	-54.88	576.44	576.53
4P	56+85.66	-55.22	576.08	576.23
4Q	56+95.65	-55.56	575.68	575.88
4R	57+05.65	-55.90	575.28	575.52
4S	57+15.64	-56.24	574.87	575.14
4T	57+25.64	-56.58	574.48	574.79
4U	57+35.63	-56.92	574.07	574.38
4V	57+45.62	-57.26	573.65	573.97
4W	57+55.62	-57.60	573.24	573.55
4X	57+65.61	-57.94	572.84	573.14
4Y	57+75.61	-58.28	572.43	572.69
4Z	57+85.60	-58.62	572.02	572.24
4AA	57+95.59	-58.95	571.59	571.77
4AB	58+05.60	-59.25	571.18	571.31
4AC	58+15.86	-59.51	570.75	570.81
⌀ W BRG PIER 9 WB	58+21.76	-59.65	570.54	570.56
⌀ PIER 9 WB	58+22.91	-59.70	570.50	570.52
⌀ E BRG PIER 9 WB	58+24.07	-59.75	570.45	570.47
4AD	58+34.30	-60.45	570.05	570.12
4AE	58+44.53	-61.12	569.65	569.77
4AF	58+54.78	-61.76	569.25	569.41
4AG	58+65.02	-62.37	568.85	569.05
4AH	58+75.27	-62.94	568.46	568.67
4AI	58+85.52	-63.49	568.06	568.29
4AJ	58+95.78	-64.00	567.67	567.91
4AK	59+06.04	-64.49	567.27	567.51
4AL	59+16.31	-64.94	566.88	567.10
4AM	59+26.57	-65.37	566.49	566.69
4AN	59+36.84	-65.76	566.12	566.30
4AO	59+47.12	-66.12	565.79	565.93
4AP	59+57.39	-66.45	565.47	565.56
4AQ	-	-	-	-
⌀ BRG. E. ABUT. WB	59+70.84	-66.84	565.04	565.06
⌀ EXP. JT.	59+72.21	-66.87	565.00	565.02
BK E. ABUT. WB	59+74.40	-66.93	564.93	564.95

BEAM W3

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-46.46	582.69	582.71
⌀ E BRG. PIER 7 WB	55+12.08	-46.46	582.64	582.66
4A	55+22.08	-46.46	582.23	582.31
4B	55+32.08	-46.46	581.82	581.96
4C	55+42.08	-46.46	581.41	581.60
4D	55+52.08	-46.46	581.04	581.27
4E	55+62.08	-46.46	580.68	580.94
4F	55+72.08	-46.46	580.32	580.60
4G	55+82.08	-46.46	579.96	580.24
4H	55+92.08	-46.46	579.60	579.88
4I	56+02.08	-46.46	579.24	579.51
4J	56+12.08	-46.46	578.88	579.13
4K	56+22.08	-46.46	578.52	578.75
4L	56+32.08	-46.46	578.16	578.35
4M	56+42.08	-46.46	577.80	577.94
4N	56+52.08	-46.46	577.45	577.54
⌀ W BRG PIER 8 WB	56+63.42	-46.46	577.05	577.07
⌀ PIER 8 WB	56+64.55	-46.46	577.01	577.03
⌀ E BRG PIER 8 WB	56+65.67	-46.45	576.97	576.99
4O	56+75.67	-46.75	576.61	576.69
4P	56+85.66	-47.05	576.25	576.39
4Q	56+95.66	-47.35	575.87	576.07
4R	57+05.65	-47.65	575.48	575.72
4S	57+15.65	-47.94	575.12	575.38
4T	57+25.64	-48.24	574.75	575.04
4U	57+35.64	-48.54	574.38	574.68
4V	57+45.63	-48.84	573.96	574.27
4W	57+55.63	-49.13	573.59	573.89
4X	57+65.63	-49.43	573.23	573.51
4Y	57+75.62	-49.73	572.85	573.11
4Z	57+85.62	-50.03	572.46	572.68
4AA	57+95.61	-50.31	572.08	572.25
4AB	58+05.62	-50.57	571.68	571.80
4AC	58+15.85	-50.79	571.29	571.35
⌀ W BRG PIER 9 WB	58+21.72	-50.91	571.08	571.10
⌀ PIER 9 WB	58+22.88	-50.95	571.04	571.06
⌀ E BRG PIER 9 WB	58+24.03	-50.99	570.99	571.02
4AD	58+34.23	-51.62	570.60	570.68
4AE	58+44.45	-52.22	570.20	570.33
4AF	58+54.66	-52.78	569.81	569.98
4AG	58+64.88	-53.32	569.42	569.62
4AH	58+75.11	-53.83	569.03	569.26
4AI	58+85.33	-54.30	568.64	568.88
4AJ	58+95.57	-54.75	568.26	568.50
4AK	59+05.80	-55.16	567.87	568.11
4AL	59+16.04	-55.55	567.48	567.72
4AM	59+26.28	-55.90	567.10	567.31
4AN	59+36.52	-56.22	566.73	566.92
4AO	59+46.76	-56.51	566.41	566.55
4AP	59+57.01	-56.77	566.09	566.19
4AQ	-	-	-	-
⌀ BRG. E. ABUT. WB	59+70.89	-57.08	565.66	565.68
⌀ EXP. JT.	59+72.26	-57.10	565.61	565.63
BK E. ABUT. WB	59+74.44	-57.14	565.55	565.57

SOUTH EDGE OF RAMP C

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-38.75	582.85	582.87
⌀ E BRG. PIER 7 WB	55+12.08	-38.77	582.80	582.82
4A	55+22.08	-38.97	582.39	582.46
4B	55+32.08	-39.17	581.97	582.10
4C	55+42.08	-39.37	581.55	581.73
4D	55+52.08	-39.57	581.18	581.39
4E	55+62.07	-39.77	580.82	581.05
4F	55+72.07	-39.97	580.46	580.71
4G	55+82.07	-40.17	580.09	580.35
4H	55+92.07	-40.37	579.73	579.98
4I	56+02.07	-40.57	579.36	579.61
4J	56+12.06	-40.77	579.00	579.23
4K	56+22.06	-40.97	578.64	578.84
4L	56+32.06	-41.17	578.27	578.45
4M	56+42.06	-41.37	577.91	578.04
4N	56+52.06	-41.57	577.55	577.64
⌀ W BRG PIER 8 WB	56+63.42	-41.80	577.14	577.17
⌀ PIER 8 WB	56+64.55	-41.82	577.10	577.13
⌀ E BRG PIER 8 WB	56+65.67	-41.84	577.06	577.08
4O	56+75.67	-42.04	576.71	576.80
4P	56+85.67	-42.24	576.35	576.50
4Q	56+95.66	-42.44	575.99	576.20
4R	57+05.66	-42.64	575.63	575.88
4S	57+15.66	-42.84	575.27	575.55
4T	57+25.66	-43.04	574.91	575.22
4U	57+35.66	-43.24	574.55	574.87
4V	57+45.65	-43.44	574.19	574.51
4W	57+55.65	-43.64	573.83	574.14
4X	57+65.65	-43.84	573.47	573.76
4Y	57+75.65	-44.04	573.11	573.38
4Z	57+85.65	-44.29	572.74	572.97
4AA	57+95.64	-44.59	572.38	572.56
4AB	58+05.65	-44.92	572.01	572.14
4AC	58+15.85	-45.29	571.63	571.69
⌀ W BRG PIER 9 WB	58+21.70	-45.52	571.41	571.43
⌀ PIER 9 WB	58+22.85	-45.57	571.37	571.39
⌀ E BRG PIER 9 WB	58+24.00	-45.61	571.33	571.35
4AD	58+34.20	-46.05	570.94	571.02
4AE	58+44.40	-46.51	570.56	570.68
4AF	58+54.61	-47.02	570.17	570.33
4AG	58+64.81	-47.56	569.78	569.97
4AH	58+75.01	-48.13	569.39	569.60
4AI	58+85.21	-48.74	568.99	569.22
4AJ	58+95.41	-49.38	568.60	568.82
4AK	59+05.61	-50.06	568.19	568.42
4AL	59+15.81	-50.78	567.79	568.00
4AM	59+26.01	-51.53	567.38	567.58
4AN	59+36.21	-52.31	566.99	567.16
4AO	59+46.41	-53.13	566.63	566.77
4AP	59+56.61	-53.99	566.27	566.37
4AQ	-	-	-	-
⌀ BRG. E. ABUT. WB	59+70.90	-55.25	565.77	565.79
⌀ EXP. JT.	59+72.27	-55.37	565.72	565.74
BK E. ABUT. WB	59+74.44	-55.57	565.65	565.67

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED - LAS	REVISED -
		CHECKED - PJL	REVISED -
PLOT SCALE	= 0.167 ' / in.	DRAWN - GM	REVISED -
PLOT DATE	= 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 2 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-83 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	664
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\proj\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1\Sheets\Structural\0998309-8323-5286-DEW\05.dgn

BEAM W4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 7 WB	55+10.88	-38.38	582.86	582.88
☐ E BRG. PIER 7 WB	55+12.08	-38.38	582.81	582.83
4A	55+22.08	-38.38	582.40	582.48
4B	55+32.08	-38.38	581.99	582.11
4C	55+42.08	-38.38	581.57	581.75
4D	55+52.08	-38.38	581.21	581.41
4E	55+62.08	-38.38	580.85	581.08
4F	55+72.08	-38.38	580.49	580.74
4G	55+82.08	-38.38	580.13	580.38
4H	55+92.08	-38.38	579.77	580.02
4I	56+02.08	-38.38	579.41	579.66
4J	56+12.08	-38.38	579.05	579.28
4K	56+22.08	-38.38	578.69	578.90
4L	56+32.08	-38.38	578.33	578.50
4M	56+42.08	-38.38	577.97	578.10
4N	56+52.08	-38.38	577.61	577.70
☐ W BRG PIER 8 WB	56+63.42	-38.38	577.22	577.24
☐ PIER 8 WB	56+64.55	-38.38	577.18	577.20
☐ E BRG PIER 8 WB	56+65.67	-38.37	577.14	577.16
4O	56+75.67	-38.63	576.79	576.88
4P	56+85.66	-38.88	576.43	576.58
4Q	56+95.66	-39.14	576.07	576.28
4R	57+05.66	-39.39	575.72	575.97
4S	57+15.65	-39.65	575.36	575.64
4T	57+25.65	-39.90	575.00	575.31
4U	57+35.65	-40.16	574.64	574.96
4V	57+45.64	-40.41	574.28	574.61
4W	57+55.64	-40.67	573.92	574.24
4X	57+65.64	-40.92	573.56	573.86
4Y	57+75.63	-41.18	573.20	573.47
4Z	57+85.63	-41.44	572.84	573.08
4AA	57+95.63	-41.68	572.48	572.67
4AB	58+05.64	-41.89	572.12	572.25
4AC	58+15.83	-42.07	571.76	571.82
☐ W BRG PIER 9 WB	58+21.69	-42.16	571.55	571.57
☐ PIER 9 WB	58+22.84	-42.19	571.51	571.53
☐ E BRG PIER 9 WB	58+23.99	-42.23	571.47	571.49
4AD	58+34.17	-42.79	571.08	571.15
4AE	58+44.36	-43.31	570.70	570.82
4AF	58+54.55	-43.81	570.32	570.47
4AG	58+64.74	-44.28	569.94	570.12
4AH	58+74.94	-44.71	569.55	569.76
4AI	58+85.14	-45.12	569.17	569.39
4AJ	58+95.35	-45.49	568.79	569.01
4AK	59+05.55	-45.84	568.41	568.63
4AL	59+15.76	-46.15	568.02	568.24
4AM	59+25.97	-46.43	567.64	567.84
4AN	59+36.19	-46.69	567.28	567.45
4AO	59+46.40	-46.91	566.96	567.09
4AP	59+56.62	-47.10	566.63	566.73
4AQ	-	-	-	-
☐ BRG. E. ABUT. WB	59+70.94	-47.31	566.18	566.20
☐ EXP. JT.	59+72.30	-47.33	566.14	566.16
BK E. ABUT. WB	59+74.47	-47.36	566.07	566.09

NORTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 7 WB	55+10.88	-36.00	582.91	582.93
☐ E BRG. PIER 7 WB	55+12.08	-36.00	582.86	582.88
4A	55+22.08	-36.00	582.45	582.52
4B	55+32.08	-36.00	582.03	582.16
4C	55+42.08	-36.00	581.62	581.79
4D	55+52.08	-36.00	581.26	581.46
4E	55+62.08	-36.00	580.89	581.13
4F	55+72.08	-36.00	580.53	580.78
4G	55+82.08	-36.00	580.17	580.43
4H	55+92.08	-36.00	579.81	580.07
4I	56+02.08	-36.00	579.45	579.70
4J	56+12.08	-36.00	579.09	579.33
4K	56+22.08	-36.00	578.73	578.94
4L	56+32.08	-36.00	578.37	578.55
4M	56+42.08	-36.00	578.01	578.15
4N	56+52.08	-36.00	577.67	577.75
☐ W BRG PIER 8 WB	56+63.42	-36.00	577.27	577.29
☐ PIER 8 WB	56+64.55	-36.00	577.23	577.25
☐ E BRG PIER 8 WB	56+65.67	-36.00	577.20	577.22
4O	56+75.67	-36.00	576.85	576.94
4P	56+85.67	-36.00	576.50	576.65
4Q	56+95.67	-36.00	576.16	576.36
4R	57+05.67	-36.00	575.81	576.05
4S	57+15.67	-36.00	575.46	575.74
4T	57+25.67	-36.00	575.12	575.41
4U	57+35.67	-36.00	574.77	575.08
4V	57+45.67	-36.00	574.42	574.73
4W	57+55.67	-36.00	574.08	574.38
4X	57+65.67	-36.00	573.73	574.02
4Y	57+75.67	-36.00	573.38	573.65
4Z	57+85.67	-36.00	573.04	573.26
4AA	57+95.67	-36.00	572.69	572.87
4AB	58+05.68	-36.00	572.34	572.47
4AC	58+15.86	-36.00	571.99	572.05
☐ W BRG PIER 9 WB	58+21.67	-36.00	571.79	571.81
☐ PIER 9 WB	58+22.81	-36.00	571.75	571.77
☐ E BRG PIER 9 WB	58+23.96	-36.00	571.71	571.73
4AD	58+34.14	-36.00	571.36	571.43
4AE	58+44.32	-36.00	571.01	571.12
4AF	58+54.50	-36.00	570.65	570.81
4AG	58+64.69	-36.00	570.30	570.49
4AH	58+74.87	-36.00	569.95	570.16
4AI	58+85.05	-36.00	569.59	569.82
4AJ	58+95.23	-36.00	569.24	569.47
4AK	59+05.42	-36.00	568.89	569.11
4AL	59+15.60	-36.00	568.54	568.75
4AM	59+25.78	-36.00	568.18	568.38
4AN	59+35.97	-36.00	567.84	568.01
4AO	59+46.15	-36.00	567.53	567.67
4AP	59+56.33	-36.00	567.22	567.31
4AQ	-	-	-	-
☐ BRG. E. ABUT. WB	59+71.00	-36.00	566.77	566.79
☐ EXP. JT.	59+72.35	-36.00	566.73	566.75
BK E. ABUT. WB	59+74.52	-36.00	566.66	566.68

BEAM W5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☐ PIER 7 WB	55+10.88	-30.29	582.99	583.01
☐ E BRG. PIER 7 WB	55+12.08	-30.29	582.94	582.96
4A	55+22.08	-30.29	582.53	582.61
4B	55+32.08	-30.29	582.12	582.25
4C	55+42.08	-30.29	581.71	581.88
4D	55+52.08	-30.29	581.34	581.55
4E	55+62.08	-30.29	580.98	581.21
4F	55+72.08	-30.29	580.62	580.87
4G	55+82.08	-30.29	580.26	580.52
4H	55+92.08	-30.29	579.90	580.16
4I	56+02.08	-30.29	579.54	579.79
4J	56+12.08	-30.29	579.18	579.42
4K	56+22.08	-30.29	578.83	579.04
4L	56+32.08	-30.29	578.47	578.65
4M	56+42.08	-30.29	578.13	578.26
4N	56+52.08	-30.29	577.78	577.87
☐ W BRG PIER 8 WB	56+63.42	-30.29	577.40	577.42
☐ PIER 8 WB	56+64.55	-30.29	577.36	577.39
☐ E BRG PIER 8 WB	56+65.67	-30.29	577.33	577.35
4O	56+75.67	-30.50	576.98	577.07
4P	56+85.67	-30.71	576.63	576.78
4Q	56+95.66	-30.93	576.29	576.49
4R	57+05.66	-31.14	575.94	576.19
4S	57+15.66	-31.35	575.60	575.87
4T	57+25.66	-31.57	575.25	575.55
4U	57+35.65	-31.78	574.90	575.21
4V	57+45.65	-31.99	574.55	574.86
4W	57+55.65	-32.20	574.20	574.50
4X	57+65.65	-32.42	573.85	574.14
4Y	57+75.65	-32.63	573.50	573.76
4Z	57+85.64	-32.84	573.16	573.38
4AA	57+95.64	-33.04	572.80	572.98
4AB	58+05.65	-33.21	572.45	572.58
4AC	58+15.82	-33.35	572.10	572.16
☐ W BRG PIER 9 WB	58+21.66	-33.42	571.90	571.92
☐ PIER 9 WB	58+22.80	-33.44	571.86	571.88
☐ E BRG PIER 9 WB	58+23.95	-33.47	571.82	571.84
4AD	58+34.11	-33.96	571.45	571.52
4AE	58+44.27	-34.41	571.07	571.19
4AF	58+54.43	-34.84	570.71	570.86
4AG	58+64.60	-35.24	570.34	570.53
4AH	58+74.78	-35.60	569.97	570.18
4AI	58+84.95	-35.94	569.60	569.82
4AJ	58+95.13	-36.24	569.23	569.46
4AK	59+05.31	-36.52	568.87	569.09
4AL	59+15.49	-36.76	568.50	568.72
4AM	59+25.67	-36.98	568.14	568.34
4AN	59+35.85	-37.16	567.79	567.96
4AO	59+46.04	-37.31	567.47	567.60
4AP	59+56.23	-37.43	567.15	567.24
4AQ	-	-	-	-
☐ BRG. E. ABUT. WB	59+70.99	-37.55	566.69	566.71
☐ EXP. JT.	59+72.35	-37.56	566.65	566.67
BK E. ABUT. WB	59+74.51	-37.57	566.58	566.60

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED - LAS	REVISED -
		CHECKED - PJL	REVISED -
PLOT SCALE	= 0.167 ' / in.	DRAWN - GM	REVISED -
PLOT DATE	= 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 3 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-84 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	665
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

Model: Default
File Name: p:\projects\trans\scorp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet5\Structural\0998309-8325-5257-DEW\06.dgn

SOUTH EDGE OF NORTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-24.00	583.09	583.11
⌀ E BRG. PIER 7 WB	55+12.08	-24.00	583.04	583.06
4A	55+22.08	-24.00	582.63	582.70
4B	55+32.08	-24.00	582.21	582.34
4C	55+42.08	-24.00	581.80	581.97
4D	55+52.08	-24.00	581.44	581.64
4E	55+62.08	-24.00	581.07	581.31
4F	55+72.08	-24.00	580.71	580.96
4G	55+82.08	-24.00	580.35	580.61
4H	55+92.08	-24.00	579.99	580.25
4I	56+02.08	-24.00	579.63	579.88
4J	56+12.08	-24.00	579.28	579.51
4K	56+22.08	-24.00	578.94	579.14
4L	56+32.08	-24.00	578.59	578.77
4M	56+42.08	-24.00	578.25	578.39
4N	56+52.08	-24.00	577.92	578.00
⌀ W BRG PIER 8 WB	56+63.42	-24.00	577.54	577.56
⌀ PIER 8 WB	56+64.55	-24.00	577.50	577.52
⌀ E BRG PIER 8 WB	56+65.67	-24.00	577.46	577.48
4O	56+75.67	-24.00	577.13	577.22
4P	56+85.67	-24.00	576.80	576.95
4Q	56+95.67	-24.00	576.46	576.67
4R	57+05.67	-24.00	576.13	576.37
4S	57+15.67	-24.00	575.80	576.07
4T	57+25.67	-24.00	575.46	575.76
4U	57+35.67	-24.00	575.13	575.44
4V	57+45.67	-24.00	574.80	575.11
4W	57+55.67	-24.00	574.47	574.77
4X	57+65.67	-24.00	574.13	574.42
4Y	57+75.67	-24.00	573.80	574.06
4Z	57+85.67	-24.00	573.47	573.69
4AA	57+95.67	-24.00	573.13	573.31
4AB	58+05.68	-24.00	572.80	572.93
4AC	58+15.82	-24.00	572.46	572.52
⌀ W BRG PIER 9 WB	58+21.62	-24.00	572.27	572.29
⌀ PIER 9 WB	58+22.76	-24.00	572.23	572.25
⌀ E BRG PIER 9 WB	58+23.90	-24.00	572.19	572.21
4AD	58+34.05	-24.00	571.85	571.93
4AE	58+44.19	-24.00	571.52	571.63
4AF	58+54.33	-24.00	571.18	571.34
4AG	58+64.48	-24.00	570.84	571.03
4AH	58+74.62	-24.00	570.50	570.71
4AI	58+84.76	-24.00	570.16	570.39
4AJ	58+94.91	-24.00	569.83	570.05
4AK	59+05.05	-24.00	569.49	569.71
4AL	59+15.20	-24.00	569.15	569.37
4AM	59+25.34	-24.00	568.81	569.01
4AN	59+35.49	-24.00	568.48	568.65
4AO	59+45.63	-24.00	568.17	568.31
4AP	59+55.78	-24.00	567.86	567.96
4AQ	59+65.92	-24.00	567.55	567.59
⌀ BRG. E. ABUT. WB	59+71.05	-24.00	567.39	567.41
⌀ EXP. JT.	59+72.41	-24.00	567.35	567.37
BK E. ABUT. WB	59+74.56	-24.00	567.28	567.30

BEAM W6

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-22.21	583.07	583.09
⌀ E BRG. PIER 7 WB	55+12.08	-22.21	583.02	583.04
4A	55+22.08	-22.21	582.61	582.68
4B	55+32.08	-22.21	582.19	582.32
4C	55+42.08	-22.21	581.80	581.97
4D	55+52.08	-22.21	581.44	581.64
4E	55+62.08	-22.21	581.09	581.32
4F	55+72.08	-22.21	580.73	580.98
4G	55+82.08	-22.21	580.37	580.63
4H	55+92.08	-22.21	580.01	580.27
4I	56+02.08	-22.21	579.66	579.91
4J	56+12.08	-22.21	579.30	579.54
4K	56+22.08	-22.21	578.97	579.18
4L	56+32.08	-22.21	578.63	578.81
4M	56+42.08	-22.21	578.29	578.42
4N	56+52.08	-22.21	577.96	578.04
⌀ W BRG PIER 8 WB	56+63.42	-22.21	577.58	577.60
⌀ PIER 8 WB	56+64.55	-22.21	577.54	577.56
⌀ E BRG PIER 8 WB	56+65.67	-22.21	577.50	577.52
4O	56+75.67	-22.38	577.17	577.25
4P	56+85.67	-22.55	576.83	576.98
4Q	56+95.67	-22.72	576.50	576.70
4R	57+05.66	-22.89	576.16	576.40
4S	57+15.66	-23.06	575.82	576.10
4T	57+25.66	-23.23	575.49	575.78
4U	57+35.66	-23.40	575.15	575.46
4V	57+45.66	-23.57	574.81	575.12
4W	57+55.66	-23.74	574.47	574.78
4X	57+65.66	-23.91	574.14	574.42
4Y	57+75.65	-24.08	573.80	574.06
4Z	57+85.65	-24.25	573.46	573.68
4AA	57+95.65	-24.41	573.12	573.30
4AB	58+05.66	-24.53	572.78	572.91
4AC	58+15.80	-24.63	572.44	572.50
⌀ W BRG PIER 9 WB	58+21.62	-24.67	572.24	572.26
⌀ PIER 9 WB	58+22.76	-24.68	572.20	572.22
⌀ E BRG PIER 9 WB	58+23.91	-24.71	572.16	572.19
4AD	58+34.04	-25.13	571.81	571.88
4AE	58+44.18	-25.51	571.45	571.57
4AF	58+54.32	-25.87	571.10	571.26
4AG	58+64.46	-26.20	570.74	570.93
4AH	58+74.61	-26.50	570.39	570.60
4AI	58+84.75	-26.76	570.04	570.26
4AJ	58+94.90	-27.00	569.69	569.91
4AK	59+05.06	-27.20	569.33	569.56
4AL	59+15.21	-27.38	568.99	569.20
4AM	59+25.36	-27.52	568.63	568.83
4AN	59+35.52	-27.63	568.29	568.46
4AO	59+45.67	-27.72	567.98	568.11
4AP	59+55.83	-27.77	567.66	567.76
4AQ	59+65.99	-27.79	567.35	567.40
⌀ BRG. E. ABUT. WB	59+71.04	-27.79	567.19	567.22
⌀ EXP. JT.	59+72.39	-27.79	567.15	567.17
BK E. ABUT. WB	59+74.55	-27.78	567.09	567.11

BEAM W7

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌀ PIER 7 WB	55+10.88	-14.13	582.95	582.97
⌀ E BRG. PIER 7 WB	55+12.08	-14.13	582.91	582.93
4A	55+22.08	-14.13	582.52	582.60
4B	55+32.08	-14.13	582.16	582.29
4C	55+42.08	-14.13	581.80	581.97
4D	55+52.08	-14.13	581.45	581.66
4E	55+62.08	-14.13	581.12	581.35
4F	55+72.08	-14.13	580.78	581.03
4G	55+82.08	-14.13	580.44	580.69
4H	55+92.08	-14.13	580.10	580.36
4I	56+02.08	-14.13	579.77	580.02
4J	56+12.08	-14.13	579.43	579.66
4K	56+22.08	-14.13	579.10	579.31
4L	56+32.08	-14.13	578.78	578.95
4M	56+42.08	-14.13	578.45	578.58
4N	56+52.08	-14.13	578.12	578.21
⌀ W BRG PIER 8 WB	56+63.42	-14.13	577.75	577.77
⌀ PIER 8 WB	56+64.55	-14.13	577.72	577.74
⌀ E BRG PIER 8 WB	56+65.67	-14.12	577.68	577.70
4O	56+75.67	-14.25	577.36	577.44
4P	56+85.67	-14.38	577.04	577.18
4Q	56+95.67	-14.51	576.71	576.91
4R	57+05.67	-14.63	576.38	576.61
4S	57+15.67	-14.76	576.06	576.32
4T	57+25.67	-14.89	575.73	576.02
4U	57+35.66	-15.02	575.41	575.70
4V	57+45.66	-15.14	575.07	575.37
4W	57+55.66	-15.27	574.75	575.04
4X	57+65.66	-15.40	574.42	574.70
4Y	57+75.66	-15.53	574.10	574.35
4Z	57+85.66	-15.66	573.77	573.98
4AA	57+95.66	-15.77	573.44	573.61
4AB	58+05.67	-15.85	573.11	573.23
4AC	58+15.78	-15.91	572.78	572.84
⌀ W BRG PIER 9 WB	58+21.59	-15.93	572.59	572.61
⌀ PIER 9 WB	58+22.73	-15.93	572.55	572.57
⌀ E BRG PIER 9 WB	58+23.87	-15.95	572.52	572.54
4AD	58+33.98	-16.30	572.18	572.25
4AE	58+44.09	-16.62	571.83	571.95
4AF	58+54.20	-16.90	571.50	571.65
4AG	58+64.32	-17.16	571.15	571.34
4AH	58+74.44	-17.39	570.81	571.02
4AI	58+84.56	-17.59	570.47	570.69
4AJ	58+94.68	-17.75	570.14	570.36
4AK	59+04.80	-17.89	569.80	570.02
4AL	59+14.93	-17.99	569.46	569.68
4AM	59+25.05	-18.07	569.13	569.33
4AN	59+35.18	-18.11	568.80	568.97
4AO	59+45.30	-18.13	568.49	568.63
4AP	59+55.43	-18.11	568.18	568.28
4AQ	59+65.55	-18.07	567.87	567.92
⌀ BRG. E. ABUT. WB	59+71.08	-18.03	567.70	567.72
⌀ EXP. JT.	59+72.43	-18.02	567.66	567.68
BK E. ABUT. WB	59+74.59	-18.00	567.60	567.62

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 0.167" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 4 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-85 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	666
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

Model Default:
File Name: p:\projects\transcorp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structural\0998309-8325-5258-DEW\07.dgn

NORTH EDGE OF SOUTH LANE - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	-12.00	582.92	582.94
C E BRG. PIER 7 WB	55+12.08	-12.00	582.87	582.89
4A	55+22.08	-12.00	582.51	582.59
4B	55+32.08	-12.00	582.15	582.28
4C	55+42.08	-12.00	581.80	581.97
4D	55+52.08	-12.00	581.46	581.66
4E	55+62.08	-12.00	581.13	581.36
4F	55+72.08	-12.00	580.79	581.04
4G	55+82.08	-12.00	580.46	580.72
4H	55+92.08	-12.00	580.13	580.38
4I	56+02.08	-12.00	579.79	580.04
4J	56+12.08	-12.00	579.46	579.69
4K	56+22.08	-12.00	579.14	579.35
4L	56+32.08	-12.00	578.81	578.99
4M	56+42.08	-12.00	578.49	578.62
4N	56+52.08	-12.00	578.17	578.25
C W BRG PIER 8 WB	56+63.42	-12.00	577.80	577.83
C PIER 8 WB	56+64.55	-12.00	577.77	577.79
C E BRG PIER 8 WB	56+65.67	-12.00	577.73	577.75
4O	56+75.67	-12.00	577.41	577.50
4P	56+85.67	-12.00	577.09	577.24
4Q	56+95.67	-12.00	576.77	576.97
4R	57+05.67	-12.00	576.45	576.69
4S	57+15.67	-12.00	576.13	576.40
4T	57+25.67	-12.00	575.81	576.10
4U	57+35.67	-12.00	575.49	575.79
4V	57+45.67	-12.00	575.17	575.47
4W	57+55.67	-12.00	574.85	575.15
4X	57+65.67	-12.00	574.53	574.81
4Y	57+75.67	-12.00	574.21	574.47
4Z	57+85.67	-12.00	573.89	574.11
4AA	57+95.67	-12.00	573.57	573.75
4AB	58+05.68	-12.00	573.25	573.38
4AC	58+15.78	-12.00	572.93	572.99
C W BRG PIER 9 WB	58+21.57	-12.00	572.75	572.77
C PIER 9 WB	58+22.71	-12.00	572.71	572.73
C E BRG PIER 9 WB	58+23.85	-12.00	572.67	572.69
4AD	58+33.95	-12.00	572.35	572.42
4AE	58+44.06	-12.00	572.03	572.14
4AF	58+54.16	-12.00	571.70	571.86
4AG	58+64.27	-12.00	571.38	571.57
4AH	58+74.37	-12.00	571.06	571.26
4AI	58+84.48	-12.00	570.73	570.96
4AJ	58+94.58	-12.00	570.41	570.64
4AK	59+04.69	-12.00	570.09	570.31
4AL	59+14.80	-12.00	569.76	569.98
4AM	59+24.90	-12.00	569.44	569.64
4AN	59+35.01	-12.00	569.12	569.29
4AO	59+45.11	-12.00	568.81	568.95
4AP	59+55.22	-12.00	568.50	568.60
4AQ	59+65.33	-12.00	568.19	568.24
C BRG. E. ABUT. WB	59+71.11	-12.00	568.01	568.03
C EXP. JT.	59+72.46	-12.00	567.97	567.99
BK E. ABUT. WB	59+74.61	-12.00	567.91	567.93

BEAM W8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	-6.04	582.83	582.85
C E BRG. PIER 7 WB	55+12.08	-6.04	582.78	582.81
4A	55+22.08	-6.04	582.46	582.55
4B	55+32.08	-6.04	582.15	582.28
4C	55+42.08	-6.04	581.79	581.97
4D	55+52.08	-6.04	581.48	581.70
4E	55+62.08	-6.04	581.15	581.39
4F	55+72.08	-6.04	580.82	581.08
4G	55+82.08	-6.04	580.51	580.78
4H	55+92.08	-6.04	580.20	580.47
4I	56+02.08	-6.04	579.87	580.13
4J	56+12.08	-6.04	579.55	579.80
4K	56+22.08	-6.04	579.23	579.45
4L	56+32.08	-6.04	578.91	579.10
4M	56+42.08	-6.04	578.61	578.75
4N	56+52.08	-6.04	578.29	578.37
C W BRG PIER 8 WB	56+63.42	-6.04	577.94	577.96
C PIER 8 WB	56+64.55	-6.04	577.90	577.93
C E BRG PIER 8 WB	56+65.67	-6.04	577.87	577.89
4O	56+75.67	-6.13	577.55	577.64
4P	56+85.67	-6.21	577.23	577.38
4Q	56+95.67	-6.30	576.92	577.11
4R	57+05.67	-6.38	576.61	576.84
4S	57+15.67	-6.47	576.29	576.56
4T	57+25.67	-6.55	575.97	576.26
4U	57+35.67	-6.64	575.65	575.95
4V	57+45.67	-6.72	575.34	575.65
4W	57+55.67	-6.81	575.02	575.32
4X	57+65.67	-6.89	574.70	574.98
4Y	57+75.67	-6.98	574.38	574.64
4Z	57+85.67	-7.06	574.08	574.29
4AA	57+95.67	-7.13	573.76	573.93
4AB	58+05.67	-7.18	573.44	573.56
4AC	58+15.76	-7.19	573.12	573.18
C W BRG PIER 9 WB	58+21.56	-7.18	572.94	572.96
C PIER 9 WB	58+22.69	-7.18	572.90	572.93
C E BRG PIER 9 WB	58+23.83	-7.19	572.87	572.89
4AD	58+33.91	-7.47	572.54	572.61
4AE	58+44.00	-7.72	572.21	572.33
4AF	58+54.09	-7.94	571.88	572.05
4AG	58+64.17	-8.13	571.56	571.75
4AH	58+74.27	-8.29	571.23	571.45
4AI	58+84.36	-8.41	570.91	571.14
4AJ	58+94.45	-8.51	570.58	570.82
4AK	59+04.55	-8.58	570.26	570.50
4AL	59+14.64	-8.62	569.94	570.17
4AM	59+24.74	-8.62	569.62	569.83
4AN	59+34.83	-8.60	569.30	569.48
4AO	59+44.93	-8.55	569.00	569.14
4AP	59+55.02	-8.46	568.69	568.80
4AQ	59+65.12	-8.35	568.39	568.44
C BRG. E. ABUT. WB	59+71.13	-8.27	568.21	568.23
C EXP. JT.	59+72.48	-8.25	568.17	568.19
BK E. ABUT. WB	59+74.62	-8.21	568.10	568.12

PGL I-80 WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	0.00	582.75	582.77
C E BRG. PIER 7 WB	55+12.08	0.00	582.71	582.73
4A	55+22.08	0.00	582.40	582.48
4B	55+32.08	0.00	582.10	582.23
4C	55+42.08	0.00	581.79	581.97
4D	55+52.08	0.00	581.48	581.70
4E	55+62.08	0.00	581.18	581.42
4F	55+72.08	0.00	580.87	581.13
4G	55+82.08	0.00	580.56	580.83
4H	55+92.08	0.00	580.26	580.53
4I	56+02.08	0.00	579.95	580.21
4J	56+12.08	0.00	579.64	579.89
4K	56+22.08	0.00	579.34	579.56
4L	56+32.08	0.00	579.03	579.21
4M	56+42.08	0.00	578.72	578.86
4N	56+52.08	0.00	578.42	578.51
C W BRG PIER 8 WB	56+63.42	0.00	578.07	578.09
C PIER 8 WB	56+64.55	0.00	578.04	578.06
C E BRG PIER 8 WB	56+65.67	0.00	578.00	578.02
4O	56+75.67	0.00	577.69	577.78
4P	56+85.67	0.00	577.39	577.53
4Q	56+95.67	0.00	577.08	577.27
4R	57+05.67	0.00	576.78	577.00
4S	57+15.67	0.00	576.47	576.73
4T	57+25.67	0.00	576.16	576.44
4U	57+35.67	0.00	575.86	576.14
4V	57+45.67	0.00	575.55	575.84
4W	57+55.67	0.00	575.24	575.53
4X	57+65.67	0.00	574.94	575.20
4Y	57+75.67	0.00	574.63	574.88
4Z	57+85.67	0.00	574.32	574.53
4AA	57+95.67	0.00	574.02	574.18
4AB	58+05.67	0.00	573.71	573.83
4AC	58+15.74	0.00	573.40	573.46
C W BRG PIER 9 WB	58+21.53	0.00	573.22	573.24
C PIER 9 WB	58+22.66	0.00	573.19	573.21
C E BRG PIER 9 WB	58+23.79	0.00	573.15	573.17
4AD	58+33.86	0.00	572.84	572.92
4AE	58+43.93	0.00	572.54	572.66
4AF	58+53.99	0.00	572.23	572.39
4AG	58+64.06	0.00	571.92	572.11
4AH	58+74.13	0.00	571.61	571.82
4AI	58+84.20	0.00	571.30	571.53
4AJ	58+94.26	0.00	570.99	571.23
4AK	59+04.33	0.00	570.68	570.92
4AL	59+14.40	0.00	570.38	570.60
4AM	59+24.47	0.00	570.07	570.28
4AN	59+34.53	0.00	569.76	569.94
4AO	59+44.60	0.00	569.45	569.60
4AP	59+54.67	0.00	569.14	569.25
4AQ	59+64.74	0.00	568.83	568.89
C BRG. E. ABUT. WB	59+71.17	0.00	568.64	568.66
C EXP. JT.	59+72.51	0.00	568.59	568.61
BK E. ABUT. WB	59+74.65	0.00	568.53	568.55

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 5 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-86 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	667
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\proj\transys\transys\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-BB-1\Sheet5\Structure\0998309-62R23-5259-DEW\08.dgn

BEAM W9

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	2.04	582.71	582.73
C E BRG. PIER 7 WB	55+12.08	2.04	582.67	582.69
4A	55+22.08	2.04	582.36	582.44
4B	55+32.08	2.04	582.06	582.19
4C	55+42.08	2.04	581.75	581.93
4D	55+52.08	2.04	581.44	581.66
4E	55+62.08	2.04	581.14	581.38
4F	55+72.08	2.04	580.83	581.09
4G	55+82.08	2.04	580.52	580.79
4H	55+92.08	2.04	580.22	580.49
4I	56+02.08	2.04	579.91	580.17
4J	56+12.08	2.04	579.60	579.85
4K	56+22.08	2.04	579.30	579.51
4L	56+32.08	2.04	578.99	579.17
4M	56+42.08	2.04	578.68	578.82
4N	56+52.08	2.04	578.38	578.46
C W BRG PIER 8 WB	56+63.42	2.04	578.03	578.05
C PIER 8 WB	56+64.55	2.04	578.00	578.02
C E BRG PIER 8 WB	56+65.67	2.04	577.96	577.98
4O	56+75.67	2.00	577.65	577.74
4P	56+85.67	1.96	577.35	577.49
4Q	56+95.67	1.91	577.04	577.23
4R	57+05.67	1.87	576.74	576.96
4S	57+15.67	1.83	576.43	576.69
4T	57+25.67	1.79	576.13	576.40
4U	57+35.67	1.74	575.82	576.11
4V	57+45.67	1.70	575.51	575.81
4W	57+55.67	1.66	575.21	575.49
4X	57+65.67	1.62	574.90	575.17
4Y	57+75.67	1.57	574.60	574.84
4Z	57+85.67	1.53	574.29	574.50
4AA	57+95.67	1.50	573.99	574.15
4AB	58+05.67	1.50	573.68	573.80
4AC	58+15.73	1.53	573.37	573.43
C W BRG PIER 9 WB	58+21.52	1.56	573.19	573.21
C PIER 9 WB	58+22.66	1.57	573.16	573.18
C E BRG PIER 9 WB	58+23.79	1.57	573.12	573.14
4AD	58+33.85	1.36	572.82	572.89
4AE	58+43.91	1.18	572.51	572.63
4AF	58+53.97	1.03	572.21	572.37
4AG	58+64.03	0.91	571.90	572.09
4AH	58+74.09	0.82	571.60	571.81
4AI	58+84.16	0.76	571.29	571.52
4AJ	58+94.22	0.73	570.98	571.22
4AK	59+04.29	0.73	570.67	570.91
4AL	59+14.35	0.76	570.36	570.59
4AM	59+24.42	0.82	570.05	570.26
4AN	59+34.48	0.91	569.74	569.93
4AO	59+44.55	1.03	569.43	569.58
4AP	59+54.61	1.18	569.12	569.23
4AQ	59+64.68	1.36	568.81	568.86
C BRG. E. ABUT. WB	59+71.18	1.50	568.61	568.63
C EXP. JT.	59+72.52	1.52	568.56	568.58
BK E. ABUT. WB	59+74.66	1.57	568.50	568.52

BEAM W10

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	10.13	582.54	582.57
C E BRG. PIER 7 WB	55+12.08	10.13	582.51	582.53
4A	55+22.08	10.13	582.20	582.28
4B	55+32.08	10.13	581.89	582.02
4C	55+42.08	10.13	581.59	581.76
4D	55+52.08	10.13	581.28	581.49
4E	55+62.08	10.13	580.97	581.21
4F	55+72.08	10.13	580.67	580.92
4G	55+82.08	10.13	580.36	580.62
4H	55+92.08	10.13	580.06	580.32
4I	56+02.08	10.13	579.75	580.00
4J	56+12.08	10.13	579.44	579.68
4K	56+22.08	10.13	579.14	579.34
4L	56+32.08	10.13	578.83	579.01
4M	56+42.08	10.13	578.52	578.66
4N	56+52.08	10.13	578.22	578.30
C W BRG PIER 8 WB	56+63.42	10.13	577.87	577.89
C PIER 8 WB	56+64.55	10.13	577.83	577.85
C E BRG PIER 8 WB	56+65.67	10.13	577.80	577.82
4O	56+75.67	10.13	577.49	577.57
4P	56+85.67	10.13	577.19	577.32
4Q	56+95.67	10.13	576.88	577.06
4R	57+05.67	10.13	576.57	576.79
4S	57+15.67	10.13	576.27	576.51
4T	57+25.67	10.13	575.96	576.23
4U	57+35.67	10.13	575.65	575.93
4V	57+45.67	10.13	575.35	575.63
4W	57+55.67	10.13	575.04	575.32
4X	57+65.67	10.13	574.73	574.99
4Y	57+75.67	10.13	574.43	574.66
4Z	57+85.67	10.13	574.12	574.32
4AA	57+95.67	10.14	573.81	573.98
4AB	58+05.67	10.18	573.51	573.62
4AC	58+15.71	10.25	573.20	573.25
C W BRG PIER 9 WB	58+21.49	10.31	573.02	573.04
C PIER 9 WB	58+22.62	10.32	572.98	573.00
C E BRG PIER 9 WB	58+23.75	10.33	572.95	572.97
4AD	58+33.78	10.19	572.64	572.72
4AE	58+43.81	10.08	572.34	572.46
4AF	58+53.85	9.99	572.03	572.19
4AG	58+63.88	9.94	571.73	571.92
4AH	58+73.92	9.92	571.42	571.63
4AI	58+83.96	9.92	571.11	571.34
4AJ	58+93.99	9.96	570.80	571.04
4AK	59+04.03	10.03	570.49	570.73
4AL	59+14.06	10.13	570.18	570.41
4AM	59+24.10	10.25	569.87	570.08
4AN	59+34.13	10.41	569.56	569.75
4AO	59+44.17	10.60	569.25	569.40
4AP	59+54.20	10.82	568.94	569.05
4AQ	59+64.23	11.07	568.63	568.68
C BRG. E. ABUT. WB	59+71.22	11.26	568.41	568.43
C EXP. JT.	59+72.56	11.30	568.37	568.39
BK E. ABUT. WB	59+74.69	11.36	568.30	568.32

INSIDE FACE OF SOUTH PARAPET - WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
C PIER 7 WB	55+10.88	12.00	582.51	582.53
C E BRG. PIER 7 WB	55+12.08	12.00	582.47	582.49
4A	55+22.08	12.00	582.16	582.24
4B	55+32.08	12.00	581.86	581.99
4C	55+42.08	12.00	581.55	581.73
4D	55+52.08	12.00	581.25	581.45
4E	55+62.08	12.00	580.94	581.17
4F	55+72.08	12.00	580.63	580.89
4G	55+82.08	12.00	580.33	580.59
4H	55+92.08	12.00	580.02	580.28
4I	56+02.08	12.00	579.71	579.97
4J	56+12.08	12.00	579.41	579.64
4K	56+22.08	12.00	579.10	579.31
4L	56+32.08	12.00	578.79	578.97
4M	56+42.08	12.00	578.49	578.62
4N	56+52.08	12.00	578.18	578.26
C W BRG PIER 8 WB	56+63.42	12.00	577.83	577.85
C PIER 8 WB	56+64.55	12.00	577.80	577.82
C E BRG PIER 8 WB	56+65.67	12.00	577.76	577.78
4O	56+75.67	12.00	577.46	577.54
4P	56+85.67	12.00	577.15	577.28
4Q	56+95.67	12.00	576.84	577.03
4R	57+05.67	12.00	576.54	576.75
4S	57+15.67	12.00	576.23	576.48
4T	57+25.67	12.00	575.92	576.19
4U	57+35.67	12.00	575.62	575.90
4V	57+45.67	12.00	575.31	575.59
4W	57+55.67	12.00	575.00	575.28
4X	57+65.67	12.00	574.70	574.96
4Y	57+75.67	12.00	574.39	574.63
4Z	57+85.67	12.00	574.08	574.29
4AA	57+95.67	12.00	573.78	573.94
4AB	58+05.67	12.00	573.47	573.59
4AC	58+15.70	12.00	573.16	573.22
C W BRG PIER 9 WB	58+21.48	12.00	572.99	573.01
C PIER 9 WB	58+22.61	12.00	572.95	572.97
C E BRG PIER 9 WB	58+23.74	12.00	572.92	572.94
4AD	58+33.77	12.00	572.61	572.68
4AE	58+43.80	12.00	572.30	572.42
4AF	58+53.83	12.00	571.99	572.15
4AG	58+63.86	12.00	571.69	571.88
4AH	58+73.89	12.00	571.38	571.59
4AI	58+83.92	12.00	571.07	571.30
4AJ	58+93.94	12.00	570.76	571.00
4AK	59+03.97	12.00	570.46	570.69
4AL	59+14.00	12.00	570.15	570.38
4AM	59+24.03	12.00	569.84	570.05
4AN	59+34.06	12.00	569.53	569.72
4AO	59+44.09	12.00	569.23	569.38
4AP	59+54.13	12.00	568.92	569.03
4AQ	59+64.16	12.00	568.61	568.67
C BRG. E. ABUT. WB	59+71.23	12.00	568.39	568.41
C EXP. JT.	59+72.56	12.00	568.35	568.37
BK E. ABUT. WB	59+74.70	12.00	568.29	568.31

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 WB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 6 - UNIT 4 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-87 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	668
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\bartley.com\trans\scorp-pw\labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structure\0998309-8325-EB-1-DEE-402.dgn



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= U55J696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 32:0.0000 "x" / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS PLAN 2 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-89 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	670
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	

TABLE OF BEAM LENGTHS

LOCATION	Q	R	S	T
Beam E1	36' - 8 1/2" (-)	146' - 9 15/16"	35' - 3 1/4"	141' - 1"
Beam E2	36' - 11 11/16"	147' - 10 3/4"	35' - 6 11/16"	142' - 2 3/4"
Beam E3	37' - 2 7/8" (+)	148' - 11 5/8"	35' - 10 1/8" (+)	143' - 4 5/8"
Beam E4	37' - 6 1/8" (+)	150' - 0 9/16"	36' - 1 5/8" (+)	144' - 6 5/8"
Beam E5	37' - 9 3/8" (+)	151' - 1 9/16"	36' - 5 3/16"	145' - 8 3/4"
Beam E6	38' - 0 5/8" (+)	152' - 2 11/16"	36' - 8 3/4"	146' - 11"
Beam E7	38' - 4" (-)	153' - 3 13/16"	37' - 0 1/2"(-)	148' - 2 1/8"
Beam E8	38' - 7 1/4" (+)	154' 5 1/16"	37' - 4" (-)	149' - 3 13/16"
Beam E9	38' - 10 5/8" (-)	155' - 6 3/8"	37' - 7 5/8" (-)	150' - 6 3/8"
Beam E10	39' - 1 7/8" (+)	156' - 7 11/16"	37' - 11 1/4" (+)	151' - 9 1/16"
Beam E11	39' - 5 1/4" (+)	157' - 9 1/8"	38' - 3" (-)	152' - 11 13/16"
Beam E12	39' - 8 5/8" (+)	158' - 10 9/16"	38' - 6 5/8" (+)	154' - 2 11/16"

TABLE OF BEAM LENGTHS

LOCATION	E	F	G	H	I	J
Inside Face of North Parapet	14	140'-0"	6' - 7 1/16"	13	130'-0"	10'-10 9/16"
Beam E1	14	140'-0"	6' - 9 15/16"	13	130'-0"	11' - 1"
Beam E2	14	140'-0"	7' - 10 3/4"	13	130'-0"	12' - 2 3/4"
PGL I-80 EB	14	140'-0"	8' - 10"	13	130'-0"	12' - 8 7/16"
Beam E3	14	140'-0"	8' - 11 5/8"	13	130'-0"	13' - 4 5/8"
Beam E4	14	140'-0"	10' - 0 9/16"	13	130'-0"	14' - 6 5/8"
South Edge of North Lane	14	140'-0"	10' - 4 5/16"	13	130'-0"	13' - 11 1/2"
Beam E5	14	140'-0"	11' - 1 9/16"	14	140'-0"	5' - 8 3/4"
Beam E6	14	140'-0"	12' - 2 11/16"	14	140'-0"	6' - 11"
North Edge of South Lane	14	140'-0"	11' - 10 9/16"	14	140'-0"	5' - 2 9/16"
Beam E17	14	140'-0"	13' - 3 13/16"	14	140'-0"	8' - 2 1/8"
Crown	14	140'-0"	13' - 4 13/16"	14	140'-0"	6' - 5 5/8"
North Edge of Ramp	14	140'-0"	14' - 8 9/16"	14	140'-0"	10' - 8 1/16"
Beam E8	14	140'-0"	14' - 5 1/16"	14	140'-0"	9' - 3 13/16"
Beam E9	15	150'-0"	5' - 6 3/8"	14	140'-0"	10' - 6 3/8"
Ramp A	15	150'-0"	6' - 3 1/16"	14	140'-0"	11' - 11 13/16"
Beam E10	15	150'-0"	6' - 7 11/16"	14	140'-0"	11' - 9 1/16"
Beam E11	15	150'-0"	7' - 9 1/8"	14	140'-0"	12'- 11 13/16"
Beam E12	15	150'-0"	8' 10 9/16"	14	140'-0"	14'- 2 11/16"
Inside Face of South Parapet	15	150'-0"	9' - 0 7/8"	14	140'-0"	14' - 4 11/16"

TABLE OF BEAM SPACING

LOCATION	A	B	C	D
⌀ E BRG. PIER 8 EB	7'-6 1/2"(-)	82'-11"	14'-2 1/8"	68'- 8 7/8"
⌀ W BRG PIER 9 EB	8' - 6" (-)	93'-5 7/8"	15'-11 3/8"	77' - 6 1/2"
⌀ E BRG PIER 9 EB	8' - 6 1/4" (-)	93'-8 1/8"	15' - 11 3/4"	77' - 8 3/8"
⌀ BRG. E. ABUT. EB	9' - 9 1/2"	107' - 8 1/2"	15' - 7 7/8"	92' 0 5/8"

NOTES:

- Up to 1/4 inch to be ground off the bridge deck and bridge approach slabs. The Profile Grade shows the final grade after grinding.

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\comtrans\corp-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-8325-5262-DEE-403.dgn

INSIDE FACE OF NORTH PARAPET - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☉ PIER 8 EB	56+82.12	-16.02	577.13	577.15
☉ E BRG. PIER 8 EB	56+83.33	-16.04	577.09	577.11
4A	56+93.33	-16.18	576.76	576.82
4B	57+03.33	-16.32	576.43	576.53
4C	57+13.33	-16.46	576.10	576.23
4D	57+23.33	-16.60	575.77	575.92
4E	57+33.32	-16.75	575.44	575.60
4F	57+43.32	-16.89	575.10	575.28
4G	57+53.32	-17.03	574.77	574.95
4H	57+63.32	-17.17	574.44	574.62
4I	57+73.32	-17.31	574.10	574.28
4J	57+83.32	-17.46	573.77	573.93
4K	57+93.32	-17.59	573.44	573.58
4L	58+03.32	-17.69	573.10	573.22
4M	58+13.31	-17.77	572.77	572.85
4N	58+23.30	-17.81	572.44	572.49
4O	-	-	-	-
☉ W BRG PIER 9 EB	58+29.88	-17.82	572.22	572.24
☉ PIER 9 EB	58+31.01	-17.82	572.18	572.21
☉ E BRG PIER 9 EB	58+32.14	-17.85	572.15	572.17
4P	58+42.13	-18.03	571.81	571.86
4Q	58+52.12	-18.18	571.47	571.56
4R	58+62.11	-18.30	571.14	571.25
4S	58+72.10	-18.39	570.80	570.94
4T	58+82.09	-18.45	570.47	570.62
4U	58+92.09	-18.48	570.14	570.30
4V	59+02.08	-18.47	569.81	569.97
4W	59+12.07	-18.44	569.49	569.65
4X	59+22.07	-18.37	569.19	569.34
4Y	59+32.06	-18.27	568.88	569.02
4Z	59+42.06	-18.14	568.59	568.70
4AA	59+52.05	-17.98	568.29	568.38
4AB	59+62.04	-17.79	567.99	568.05
4AC	-	-	-	-
☉ BRG. E. ABUT. EB	59+72.83	-17.54	567.67	567.69
☉ EXP. JT.	59+74.48	-17.50	567.62	567.65
BK E. ABUT. EB	59+76.64	-17.51	567.56	567.58

BEAM E1

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☉ PIER 8 EB	56+82.12	-14.14	577.18	577.20
☉ E BRG. PIER 8 EB	56+83.33	-14.16	577.14	577.16
4A	56+93.33	-14.30	576.80	576.87
4B	57+03.33	-14.45	576.48	576.58
4C	57+13.33	-14.59	576.15	576.27
4D	57+23.33	-14.73	575.82	575.97
4E	57+33.32	-14.87	575.49	575.65
4F	57+43.32	-15.01	575.16	575.34
4G	57+53.32	-15.15	574.83	575.01
4H	57+63.32	-15.30	574.50	574.68
4I	57+73.32	-15.44	574.16	574.34
4J	57+83.32	-15.58	573.84	574.00
4K	57+93.32	-15.71	573.50	573.64
4L	58+03.32	-15.82	573.17	573.29
4M	58+13.30	-15.89	572.85	572.93
4N	58+23.29	-15.94	572.52	572.57
4O	-	-	-	-
☉ W BRG PIER 9 EB	58+30.10	-15.95	572.30	572.32
☉ PIER 9 EB	58+31.23	-15.96	572.26	572.28
☉ E BRG PIER 9 EB	58+32.36	-15.98	572.22	572.24
4P	58+42.34	-16.16	571.88	571.94
4Q	58+52.33	-16.31	571.55	571.64
4R	58+62.31	-16.43	571.22	571.33
4S	58+72.30	-16.52	570.89	571.02
4T	58+82.29	-16.58	570.55	570.70
4U	58+92.27	-16.60	570.23	570.38
4V	59+02.26	-16.60	569.90	570.06
4W	59+12.25	-16.56	569.58	569.74
4X	59+22.24	-16.49	569.28	569.43
4Y	59+32.23	-16.39	568.98	569.11
4Z	59+42.21	-16.26	568.68	568.79
4AA	59+52.20	-16.10	568.38	568.47
4AB	59+62.19	-15.91	568.08	568.14
4AC	-	-	-	-
☉ BRG. E. ABUT. EB	59+73.17	-15.66	567.76	567.78
☉ EXP. JT.	59+74.82	-15.62	567.71	567.73
BK E. ABUT. EB	59+76.98	-15.57	567.65	567.67

BEAM E2

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☉ PIER 8 EB	56+82.12	-6.61	577.34	577.36
☉ E BRG. PIER 8 EB	56+83.33	-6.62	577.30	577.33
4A	56+93.33	-6.70	576.99	577.05
4B	57+03.33	-6.78	576.67	576.77
4C	57+13.33	-6.85	576.35	576.49
4D	57+23.33	-6.93	576.03	576.19
4E	57+33.33	-7.01	575.72	575.89
4F	57+43.33	-7.08	575.40	575.59
4G	57+53.33	-7.16	575.08	575.27
4H	57+63.33	-7.24	574.76	574.95
4I	57+73.33	-7.32	574.44	574.63
4J	57+83.33	-7.39	574.13	574.30
4K	57+93.33	-7.46	573.80	573.95
4L	58+03.33	-7.50	573.49	573.62
4M	58+13.29	-7.51	573.19	573.28
4N	58+23.25	-7.49	572.87	572.92
4O	-	-	-	-
☉ W BRG PIER 9 EB	58+31.11	-7.45	572.63	572.65
☉ PIER 9 EB	58+32.24	-7.44	572.59	572.61
☉ E BRG PIER 9 EB	58+33.37	-7.46	572.55	572.58
4P	58+43.32	-7.56	572.23	572.29
4Q	58+53.28	-7.62	571.92	572.01
4R	58+63.24	-7.65	571.59	571.71
4S	58+73.20	-7.65	571.29	571.43
4T	58+83.16	-7.62	570.97	571.12
4U	58+93.12	-7.56	570.66	570.82
4V	59+03.08	-7.47	570.33	570.51
4W	59+13.04	-7.34	570.04	570.20
4X	59+23.00	-7.19	569.74	569.90
4Y	59+32.96	-7.00	569.44	569.59
4Z	59+42.91	-6.78	569.15	569.28
4AA	59+52.87	-6.53	568.86	568.96
4AB	59+62.83	-6.26	568.57	568.63
4AC	-	-	-	-
☉ BRG. E. ABUT. EB	59+74.91	-5.87	568.22	568.24
☉ EXP. JT.	59+76.56	-5.82	568.17	568.19
BK E. ABUT. EB	59+78.72	-5.74	568.11	568.13

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 0.167' / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 1 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-90 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	671
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structure\0998309-8325-5263-DEE-404.dgn

PGL I-80 EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌚ PIER 8 EB	56+82.12	0.00	577.50	577.52
⌚ E BRG. PIER 8 EB	56+83.33	0.00	577.46	577.48
4A	56+93.33	0.00	577.15	577.22
4B	57+03.33	0.00	576.85	576.95
4C	57+13.33	0.00	576.54	576.67
4D	57+23.33	0.00	576.23	576.39
4E	57+33.33	0.00	575.93	576.10
4F	57+43.33	0.00	575.62	575.81
4G	57+53.33	0.00	575.31	575.51
4H	57+63.33	0.00	575.01	575.20
4I	57+73.33	0.00	574.70	574.89
4J	57+83.33	0.00	574.39	574.57
4K	57+93.33	0.00	574.09	574.24
4L	58+03.33	0.00	573.78	573.91
4M	58+13.27	0.00	573.48	573.57
4N	58+23.21	0.00	573.17	573.23
4O	-	-	-	-
⌚ W BRG PIER 9 EB	58+31.99	0.00	572.90	572.92
⌚ PIER 9 EB	58+33.12	0.00	572.87	572.89
⌚ E BRG PIER 9 EB	58+34.24	0.00	572.83	572.85
4P	58+44.18	0.00	572.53	572.59
4Q	58+54.11	0.00	572.22	572.32
4R	58+64.05	0.00	571.92	572.04
4S	58+73.98	0.00	571.62	571.76
4T	58+83.92	0.00	571.31	571.47
4U	58+93.86	0.00	571.01	571.17
4V	59+03.79	0.00	570.70	570.87
4W	59+13.73	0.00	570.40	570.57
4X	59+23.67	0.00	570.09	570.25
4Y	59+33.60	0.00	569.79	569.94
4Z	59+43.54	0.00	569.48	569.61
4AA	59+53.48	0.00	569.18	569.28
4AB	59+63.42	0.00	568.87	568.95
4AC	-	-	-	-
⌚ BRG. E. ABUT. EB	59+75.95	0.00	568.49	568.51
⌚ EXP. JT.	59+77.59	0.00	568.44	568.46
BK E. ABUT. EB	59+79.73	0.00	568.37	568.39

BEAM E3

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌚ PIER 8 EB	56+82.12	0.92	577.52	577.54
⌚ E BRG. PIER 8 EB	56+83.33	0.92	577.48	577.50
4A	56+93.33	0.90	577.18	577.24
4B	57+03.33	0.89	576.87	576.97
4C	57+13.33	0.88	576.56	576.70
4D	57+23.33	0.86	576.26	576.42
4E	57+33.33	0.85	575.95	576.13
4F	57+43.33	0.84	575.65	575.84
4G	57+53.33	0.82	575.34	575.53
4H	57+63.33	0.81	575.04	575.23
4I	57+73.33	0.80	574.73	574.92
4J	57+83.33	0.79	574.42	574.60
4K	57+93.33	0.78	574.12	574.27
4L	58+03.33	0.80	573.81	573.94
4M	58+13.27	0.86	573.51	573.61
4N	58+23.21	0.94	573.21	573.27
4O	-	-	-	-
⌚ W BRG PIER 9 EB	58+32.12	1.05	572.94	572.97
⌚ PIER 9 EB	58+33.24	1.06	572.91	572.93
⌚ E BRG PIER 9 EB	58+34.37	1.05	572.88	572.90
4P	58+44.30	1.05	572.57	572.63
4Q	58+54.23	1.07	572.27	572.36
4R	58+64.16	1.12	571.97	572.09
4S	58+74.09	1.21	571.67	571.81
4T	58+84.03	1.33	571.37	571.53
4U	58+93.96	1.47	571.08	571.25
4V	59+03.89	1.65	570.78	570.96
4W	59+13.82	1.86	570.49	570.66
4X	59+23.75	2.10	570.20	570.36
4Y	59+33.68	2.38	569.91	570.06
4Z	59+43.60	2.68	569.62	569.75
4AA	59+53.53	3.02	569.33	569.44
4AB	59+63.45	3.38	569.05	569.12
4AC	-	-	-	-
⌚ BRG. E. ABUT. EB	59+76.64	3.91	568.67	568.69
⌚ EXP. JT.	59+78.29	3.99	568.62	568.65
BK E. ABUT. EB	59+80.45	4.08	568.56	568.58

BEAM E4

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌚ PIER 8 EB	56+82.12	8.45	577.69	577.71
⌚ E BRG. PIER 8 EB	56+83.33	8.45	577.66	577.68
4A	56+93.33	8.50	577.37	577.43
4B	57+03.33	8.55	577.06	577.16
4C	57+13.33	8.60	576.77	576.90
4D	57+23.33	8.65	576.48	576.64
4E	57+33.33	8.70	576.19	576.37
4F	57+43.33	8.75	575.89	576.08
4G	57+53.33	8.81	575.59	575.79
4H	57+63.33	8.86	575.30	575.50
4I	57+73.33	8.91	575.01	575.20
4J	57+83.33	8.96	574.72	574.89
4K	57+93.33	9.01	574.43	574.59
4L	58+03.33	9.10	574.13	574.27
4M	58+13.25	9.22	573.85	573.95
4N	58+23.16	9.37	573.56	573.62
4O	-	-	-	-
⌚ W BRG PIER 9 EB	58+33.11	9.55	573.28	573.30
⌚ PIER 9 EB	58+34.24	9.57	573.24	573.27
⌚ E BRG PIER 9 EB	58+35.36	9.57	573.21	573.23
4P	58+45.26	9.65	572.92	572.98
4Q	58+55.17	9.76	572.64	572.73
4R	58+65.08	9.89	572.35	572.47
4S	58+74.98	10.07	572.07	572.21
4T	58+84.89	10.27	571.79	571.95
4U	58+94.79	10.50	571.51	571.68
4V	59+04.69	10.76	571.23	571.41
4W	59+14.59	11.06	570.95	571.12
4X	59+24.49	11.39	570.66	570.83
4Y	59+34.39	11.74	570.37	570.53
4Z	59+44.28	12.13	570.09	570.22
4AA	59+54.18	12.55	569.81	569.92
4AB	59+64.07	13.00	569.53	569.61
4AC	-	-	-	-
⌚ BRG. E. ABUT. EB	59+78.37	13.70	569.13	569.15
⌚ EXP. JT.	59+80.01	13.79	569.08	569.10
BK E. ABUT. EB	59+82.17	13.90	569.02	569.04

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 0.167 ' / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 2 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-91 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	672
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structure\0998309-8325-5264-DEE-405.dgn

SOUTH EDGE OF NORTH LANE - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	12.00	577.77	577.79
☒ E BRG. PIER 8 EB	56+83.33	12.00	577.73	577.76
4A	56+93.33	12.00	577.44	577.51
4B	57+03.33	12.00	577.15	577.25
4C	57+13.33	12.00	576.86	577.00
4D	57+23.33	12.00	576.57	576.73
4E	57+33.33	12.00	576.28	576.46
4F	57+43.33	12.00	575.99	576.18
4G	57+53.33	12.00	575.70	575.89
4H	57+63.33	12.00	575.41	575.60
4I	57+73.33	12.00	575.12	575.31
4J	57+83.33	12.00	574.82	575.00
4K	57+93.33	12.00	574.53	574.69
4L	58+03.33	12.00	574.24	574.38
4M	58+13.24	12.00	573.95	574.06
4N	58+23.14	12.00	573.67	573.73
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+33.40	12.00	573.37	573.39
☒ PIER 9 EB	58+34.52	12.00	573.34	573.36
☒ E BRG PIER 9 EB	58+35.64	12.00	573.30	573.32
4P	58+45.54	12.00	573.01	573.07
4Q	58+55.44	12.00	572.73	572.82
4R	58+65.34	12.00	572.44	572.56
4S	58+75.24	12.00	572.15	572.29
4T	58+85.14	12.00	571.86	572.02
4U	58+95.04	12.00	571.57	571.75
4V	59+04.94	12.00	571.29	571.46
4W	59+14.84	12.00	570.99	571.16
4X	59+24.74	12.00	570.68	570.85
4Y	59+34.64	12.00	570.38	570.53
4Z	59+44.54	12.00	570.08	570.21
4AA	59+54.44	12.00	569.77	569.88
4AB	59+64.34	12.00	569.47	569.55
4AC	-	-	-	-
☒ BRG. E. ABUT. EB	59+78.07	12.00	569.05	569.07
☒ EXP. JT.	59+79.70	12.00	569.00	569.02
BK E. ABUT. EB	59+81.83	12.00	568.93	568.95

BEAM E5

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	15.98	577.86	577.88
☒ E BRG. PIER 8 EB	56+83.33	15.99	577.82	577.85
4A	56+93.33	16.11	577.54	577.60
4B	57+03.33	16.22	577.26	577.36
4C	57+13.33	16.33	576.98	577.11
4D	57+23.33	16.44	576.69	576.85
4E	57+33.33	16.55	576.41	576.58
4F	57+43.33	16.67	576.13	576.33
4G	57+53.33	16.78	575.85	576.05
4H	57+63.32	16.89	575.57	575.76
4I	57+73.32	17.00	575.28	575.47
4J	57+83.32	17.12	575.01	575.19
4K	57+93.32	17.23	574.73	574.89
4L	58+03.32	17.38	574.45	574.59
4M	58+13.22	17.56	574.18	574.29
4N	58+23.10	17.77	573.91	573.97
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+34.11	18.05	573.61	573.63
☒ PIER 9 EB	58+35.23	18.07	573.58	573.60
☒ E BRG PIER 9 EB	58+36.35	18.08	573.54	573.57
4P	58+46.23	18.25	573.27	573.33
4Q	58+56.11	18.44	573.00	573.10
4R	58+65.98	18.66	572.73	572.86
4S	58+75.86	18.92	572.47	572.61
4T	58+85.74	19.20	572.20	572.36
4U	58+95.61	19.52	571.94	572.11
4V	59+05.48	19.87	571.68	571.85
4W	59+15.35	20.24	571.40	571.57
4X	59+25.22	20.65	571.12	571.29
4Y	59+35.09	21.09	570.84	570.99
4Z	59+44.95	21.56	570.56	570.70
4AA	59+54.81	22.07	570.29	570.40
4AB	59+64.67	22.60	570.01	570.09
4AC	59+74.52	23.16	569.74	569.78
☒ BRG. E. ABUT. EB	59+80.08	23.49	569.58	569.60
☒ EXP. JT.	59+81.72	23.59	569.54	569.56
BK E. ABUT. EB	59+83.87	23.73	569.48	569.50

BEAM E6

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	23.51	578.03	578.05
☒ E BRG. PIER 8 EB	56+83.33	23.53	578.00	578.02
4A	56+93.33	23.70	577.73	577.79
4B	57+03.33	23.88	577.46	577.56
4C	57+13.33	24.05	577.18	577.32
4D	57+23.32	24.23	576.91	577.08
4E	57+33.32	24.40	576.64	576.83
4F	57+43.32	24.57	576.37	576.57
4G	57+53.32	24.75	576.10	576.31
4H	57+63.32	24.92	575.84	576.04
4I	57+73.32	25.09	575.57	575.77
4J	57+83.31	25.27	575.30	575.49
4K	57+93.31	25.45	575.04	575.20
4L	58+03.31	25.66	574.77	574.91
4M	58+13.19	25.90	574.51	574.62
4N	58+23.04	26.17	574.25	574.33
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+35.09	26.54	573.94	573.96
☒ PIER 9 EB	58+36.21	26.58	573.91	573.93
☒ E BRG PIER 9 EB	58+37.33	26.60	573.88	573.90
4P	58+47.18	26.84	573.62	573.68
4Q	58+57.03	27.12	573.37	573.46
4R	58+66.88	27.43	573.12	573.24
4S	58+76.73	27.76	572.86	573.01
4T	58+86.58	28.13	572.61	572.77
4U	58+96.42	28.53	572.37	572.54
4V	59+06.26	28.96	572.13	572.30
4W	59+16.10	29.42	571.85	572.03
4X	59+25.94	29.91	571.58	571.75
4Y	59+35.78	30.43	571.30	571.46
4Z	59+45.61	30.98	571.03	571.17
4AA	59+55.43	31.57	570.76	570.87
4AB	59+65.26	32.18	570.49	570.57
4AC	59+75.08	32.83	570.22	570.27
☒ BRG. E. ABUT. EB	59+81.78	33.28	570.04	570.06
☒ EXP. JT.	59+83.42	33.40	570.00	570.02
BK E. ABUT. EB	59+85.57	33.55	569.94	569.96

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED	- LAS	REVISED	-
		CHECKED	- PJL	REVISED	-
PLOT SCALE	= 0.167' / in.	DRAWN	- GM	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	- LAS	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 3 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-92 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	673
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

Model: Default
File Name: p:\projects\trans\trans\corp\pw\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structural\0998309-42R23-5245-DEE-406.dgn

NORTH EDGE OF SOUTH LANE - EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	24.00	578.04	578.06
☒ E BRG. PIER 8 EB	56+83.33	24.00	578.01	578.03
4A	56+93.33	24.00	577.73	577.80
4B	57+03.33	24.00	577.46	577.56
4C	57+13.33	24.00	577.18	577.32
4D	57+23.33	24.00	576.91	577.07
4E	57+33.33	24.00	576.63	576.82
4F	57+43.33	24.00	576.36	576.56
4G	57+53.33	24.00	576.08	576.29
4H	57+63.33	24.00	575.81	576.01
4I	57+73.33	24.00	575.53	575.73
4J	57+83.33	24.00	575.25	575.44
4K	57+93.33	24.00	574.98	575.15
4L	58+03.33	24.00	574.70	574.85
4M	58+13.21	24.00	574.43	574.54
4N	58+23.08	24.00	574.16	574.24
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+34.80	24.00	573.84	573.86
☒ PIER 9 EB	58+35.92	24.00	573.81	573.83
☒ E BRG PIER 9 EB	58+37.03	24.00	573.78	573.80
4P	58+46.89	24.00	573.50	573.56
4Q	58+56.76	24.00	573.23	573.32
4R	58+66.62	24.00	572.96	573.08
4S	58+76.48	24.00	572.69	572.83
4T	58+86.34	24.00	572.42	572.58
4U	58+96.21	24.00	572.15	572.32
4V	59+06.07	24.00	571.87	572.05
4W	59+15.93	24.00	571.58	571.75
4X	59+25.80	24.00	571.27	571.44
4Y	59+35.66	24.00	570.97	571.13
4Z	59+45.52	24.00	570.67	570.81
4AA	59+55.39	24.00	570.37	570.48
4AB	59+65.25	24.00	570.07	570.15
4AC	59+75.12	24.00	569.76	569.81
☒ BRG. E. ABUT. EB	59+80.17	24.00	569.61	569.63
☒ EXP. JT.	59+81.79	24.00	569.56	569.58
BK E. ABUT. EB	59+83.92	24.00	569.50	569.52

BEAM E7

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	31.04	578.20	578.23
☒ E BRG. PIER 8 EB	56+83.33	31.07	578.17	578.19
4A	56+93.33	31.30	577.92	577.98
4B	57+03.32	31.54	577.65	577.76
4C	57+13.32	31.77	577.40	577.54
4D	57+23.32	32.00	577.13	577.29
4E	57+33.32	32.24	576.87	577.06
4F	57+43.31	32.47	576.61	576.81
4G	57+53.31	32.71	576.36	576.56
4H	57+63.31	32.94	576.10	576.31
4I	57+73.31	33.17	575.85	576.05
4J	57+83.30	33.41	575.59	575.78
4K	57+93.30	33.65	575.34	575.51
4L	58+03.30	33.92	575.09	575.23
4M	58+13.15	34.22	574.84	574.96
4N	58+22.98	34.55	574.60	574.68
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+36.08	35.04	574.28	574.30
☒ PIER 9 EB	58+37.19	35.08	574.25	574.27
☒ E BRG PIER 9 EB	58+38.31	35.12	574.22	574.24
4P	58+48.13	35.44	573.98	574.04
4Q	58+57.96	35.80	573.74	573.84
4R	58+67.78	36.19	573.49	573.62
4S	58+77.60	36.60	573.22	573.38
4T	58+87.41	37.05	572.96	573.14
4U	58+97.23	37.53	572.69	572.88
4V	59+07.04	38.04	572.43	572.62
4W	59+16.85	38.58	572.12	572.32
4X	59+26.65	39.16	571.81	572.00
4Y	59+36.45	39.76	571.50	571.67
4Z	59+46.25	40.39	571.18	571.34
4AA	59+56.05	41.05	570.87	571.00
4AB	59+65.84	41.75	570.56	570.65
4AC	59+75.63	42.47	570.24	570.30
☒ BRG. E. ABUT. EB	59+83.47	43.08	569.99	570.01
☒ EXP. JT.	59+85.11	43.20	569.94	569.96
BK E. ABUT. EB	59+87.25	43.37	569.87	569.89

CROWN EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☒ PIER 8 EB	56+82.12	36.00	578.32	578.34
☒ E BRG. PIER 8 EB	56+83.33	36.00	578.28	578.31
4A	56+93.33	36.00	578.02	578.09
4B	57+03.33	36.00	577.76	577.87
4C	57+13.33	36.00	577.50	577.64
4D	57+23.33	36.00	577.24	577.41
4E	57+33.33	36.00	576.98	577.17
4F	57+43.33	36.00	576.72	576.92
4G	57+53.33	36.00	576.46	576.67
4H	57+63.33	36.00	576.20	576.41
4I	57+73.33	36.00	575.94	576.15
4J	57+83.33	36.00	575.68	575.87
4K	57+93.33	36.00	575.42	575.60
4L	58+03.33	36.00	575.16	575.31
4M	58+13.18	36.00	574.91	575.02
4N	58+23.01	36.00	574.65	574.73
4O	-	-	-	-
☒ W BRG PIER 9 EB	58+36.19	36.00	574.31	574.33
☒ PIER 9 EB	58+37.30	36.00	574.28	574.30
☒ E BRG PIER 9 EB	58+38.41	36.00	574.25	574.27
4P	58+48.24	36.00	574.00	574.06
4Q	58+58.06	36.00	573.74	573.84
4R	58+67.89	36.00	573.49	573.62
4S	58+77.71	36.00	573.23	573.39
4T	58+87.54	36.00	572.98	573.15
4U	58+97.37	36.00	572.72	572.91
4V	59+07.19	36.00	572.46	572.66
4W	59+17.02	36.00	572.17	572.36
4X	59+26.85	36.00	571.87	572.06
4Y	59+36.68	36.00	571.56	571.74
4Z	59+46.50	36.00	571.26	571.42
4AA	59+56.33	36.00	570.96	571.09
4AB	59+66.16	36.00	570.66	570.76
4AC	59+75.99	36.00	570.36	570.42
☒ BRG. E. ABUT. EB	59+82.25	36.00	570.17	570.19
☒ EXP. JT.	59+83.87	36.00	570.12	570.14
BK E. ABUT. EB	59+85.99	36.00	570.06	570.08

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 4 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-93 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	674
		CONTRACT NO. 62R23		
		ILLINOIS	FED. AID PROJECT	

MODEL Default:
FILE NAME: p:\proj\transys\transys\corp\pw\hntb\com\transys\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheet\Structure\0998309-8325-5266-DEE-407.dgn

NORTH EDGE OF RAMP A

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	36.15	578.31	578.33
⌒ E BRG. PIER 8 EB	56+83.33	36.21	578.28	578.30
4A	56+93.32	36.74	578.01	578.07
4B	57+03.30	37.26	577.74	577.84
4C	57+13.29	37.78	577.47	577.61
4D	57+23.27	38.31	577.20	577.36
4E	57+33.26	38.83	576.93	577.11
4F	57+43.25	39.35	576.66	576.86
4G	57+53.23	39.88	576.39	576.59
4H	57+63.22	40.40	576.12	576.33
4I	57+73.21	40.92	575.85	576.05
4J	57+83.19	41.45	575.58	575.77
4K	57+93.18	41.98	575.31	575.48
4L	58+03.17	42.53	575.04	575.19
4M	58+12.99	43.12	574.77	574.89
4N	58+22.78	43.75	574.50	574.59
4O	-	-	-	-
⌒ W BRG PIER 9 EB	58+37.19	44.71	574.11	574.13
⌒ PIER 9 EB	58+38.31	44.79	574.08	574.10
⌒ E BRG PIER 9 EB	58+39.42	44.87	574.05	574.07
4P	58+49.20	45.57	573.78	573.84
4Q	58+58.98	46.31	573.51	573.61
4R	58+68.74	47.07	573.24	573.37
4S	58+78.51	47.87	572.97	573.12
4T	58+88.27	48.69	572.70	572.87
4U	58+98.03	49.55	572.43	572.61
4V	59+07.78	50.43	572.16	572.35
4W	59+17.52	51.35	571.85	572.03
4X	59+27.27	52.29	571.53	571.71
4Y	59+37.00	53.27	571.21	571.38
4Z	59+46.73	54.28	570.89	571.04
4AA	59+56.45	55.32	570.57	570.70
4AB	59+66.17	56.38	570.25	570.35
4AC	59+75.89	57.48	569.93	569.99
⌒ BRG. E. ABUT. EB	59+86.15	58.68	569.60	569.62
⌒ EXP. JT.	59+87.79	58.87	569.54	569.56
BK E. ABUT. EB	59+89.94	59.13	569.47	569.50

BEAM E8

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	38.57	578.26	578.28
⌒ E BRG. PIER 8 EB	56+83.33	38.61	578.23	578.25
4A	56+93.33	38.90	577.96	578.03
4B	57+03.32	39.19	577.70	577.80
4C	57+13.32	39.49	577.43	577.57
4D	57+23.31	39.78	577.17	577.33
4E	57+33.31	40.07	576.90	577.09
4F	57+43.30	40.37	576.64	576.83
4G	57+53.30	40.66	576.37	576.58
4H	57+63.30	40.95	576.11	576.31
4I	57+73.29	41.25	575.84	576.04
4J	57+83.29	41.54	575.57	575.76
4K	57+93.28	41.84	575.31	575.48
4L	58+03.28	42.17	575.04	575.19
4M	58+13.11	42.53	574.78	574.90
4N	58+22.91	42.92	574.52	574.60
4O	-	-	-	-
⌒ W BRG PIER 9 EB	58+37.05	43.54	574.14	574.16
⌒ PIER 9 EB	58+38.17	43.59	574.11	574.13
⌒ E BRG PIER 9 EB	58+39.28	43.63	574.08	574.10
4P	58+49.08	44.04	573.81	573.88
4Q	58+58.87	44.47	573.55	573.65
4R	58+68.66	44.94	573.29	573.42
4S	58+78.45	45.44	573.02	573.17
4T	58+88.24	45.97	572.76	572.93
4U	58+98.02	46.53	572.49	572.67
4V	59+07.80	47.12	572.23	572.41
4W	59+17.58	47.74	571.92	572.10
4X	59+27.36	48.39	571.60	571.78
4Y	59+37.13	49.07	571.29	571.46
4Z	59+46.89	49.78	570.98	571.12
4AA	59+56.65	50.52	570.66	570.79
4AB	59+66.41	51.30	570.35	570.44
4AC	59+76.17	52.10	570.03	570.09
⌒ BRG. E. ABUT. EB	59+85.16	52.87	569.74	569.76
⌒ EXP. JT.	59+86.79	53.01	569.69	569.71
BK E. ABUT. EB	59+88.93	53.20	569.62	569.64

BEAM E9

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	46.10	578.10	578.12
⌒ E BRG. PIER 8 EB	56+83.33	46.14	578.07	578.09
4A	56+93.32	46.50	577.80	577.87
4B	57+03.32	46.85	577.53	577.64
4C	57+13.31	47.20	577.27	577.41
4D	57+23.30	47.55	577.00	577.17
4E	57+33.30	47.91	576.73	576.93
4F	57+43.29	48.26	576.47	576.68
4G	57+53.29	48.61	576.20	576.42
4H	57+63.28	48.96	575.93	576.15
4I	57+73.27	49.31	575.67	575.88
4J	57+83.27	49.67	575.40	575.60
4K	57+93.26	50.03	575.13	575.32
4L	58+03.26	50.41	574.87	575.03
4M	58+13.07	50.83	574.60	574.73
4N	58+22.84	51.28	574.34	574.43
4O	58+32.61	51.76	574.08	574.12
⌒ W BRG PIER 9 EB	58+38.03	52.04	573.93	573.95
⌒ PIER 9 EB	58+39.14	52.10	573.90	573.92
⌒ E BRG PIER 9 EB	58+40.25	52.15	573.87	573.89
4P	58+50.02	52.63	573.61	573.67
4Q	58+59.78	53.15	573.34	573.44
4R	58+69.55	53.70	573.08	573.21
4S	58+79.31	54.27	572.81	572.97
4T	58+89.06	54.88	572.55	572.72
4U	58+98.81	55.52	572.28	572.47
4V	59+08.56	56.18	572.01	572.20
4W	59+18.31	56.88	571.70	571.89
4X	59+28.05	57.61	571.38	571.57
4Y	59+37.79	58.37	571.07	571.25
4Z	59+47.52	59.16	570.75	570.91
4AA	59+57.25	59.98	570.44	570.58
4AB	59+66.97	60.83	570.13	570.23
4AC	59+76.69	61.71	569.81	569.88
⌒ BRG. E. ABUT. EB	59+86.83	62.66	569.48	569.51
⌒ EXP. JT.	59+88.46	62.82	569.43	569.45
BK E. ABUT. EB	59+90.60	63.02	569.36	569.38

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

 WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ699614	DESIGNED - LAS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TOP OF SLAB ELEVATIONS 5 - UNIT 4 EB STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB	SHEET 5-94 OF 5-333 SHEETS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CHECKED - PJL	REVISIED -	REVISED -				I-80	FAI 80 21 STRUCTURE 2	WILL	1230	675
	PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -				CONTRACT NO. 62R23				
	PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1\Sheets\Structural\0998309-8325-5267-DEE-408.dgn

B RAMP A

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	48.17	578.06	578.08
⌒ E BRG. PIER 8 EB	56+83.33	48.23	578.02	578.04
4A	56+93.32	48.75	577.75	577.82
4B	57+03.30	49.28	577.48	577.60
4C	57+13.29	49.80	577.21	577.37
4D	57+23.27	50.32	576.94	577.13
4E	57+33.26	50.85	576.67	576.88
4F	57+43.25	51.37	576.40	576.63
4G	57+53.23	51.89	576.13	576.37
4H	57+63.22	52.42	575.86	576.10
4I	57+73.21	52.94	575.59	575.82
4J	57+83.19	53.46	575.32	575.54
4K	57+93.18	53.99	575.05	575.25
4L	58+03.17	54.55	574.78	574.95
4M	58+12.96	55.14	574.51	574.65
4N	58+22.71	55.76	574.25	574.35
4O	58+32.46	56.41	573.98	574.03
⌒ W BRG PIER 9 EB	58+38.57	56.83	573.81	573.83
⌒ PIER 9 EB	58+39.69	56.91	573.78	573.80
⌒ E BRG PIER 9 EB	58+40.80	56.99	573.75	573.77
4P	58+50.54	57.70	573.48	573.55
4Q	58+60.28	58.44	573.21	573.32
4R	58+70.01	59.20	572.94	573.08
4S	58+79.74	60.00	572.67	572.84
4T	58+89.46	60.83	572.40	572.59
4U	58+99.18	61.69	572.13	572.34
4V	59+08.90	62.58	571.85	572.06
4W	59+18.61	63.50	571.54	571.75
4X	59+28.31	64.45	571.22	571.43
4Y	59+38.01	65.43	570.90	571.09
4Z	59+47.71	66.44	570.58	570.76
4AA	59+57.39	67.48	570.26	570.41
4AB	59+67.08	68.55	569.94	570.06
4AC	59+76.75	69.65	569.62	569.70
⌒ BRG. E. ABUT. EB	59+88.24	71.00	569.25	569.27
⌒ EXP. JT.	59+89.88	71.19	569.19	569.22
BK E. ABUT. EB	59+92.02	71.45	569.12	569.15

BEAM E10

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	53.63	577.94	577.96
⌒ E BRG. PIER 8 EB	56+83.33	53.68	577.91	577.93
4A	56+93.32	54.09	577.64	577.71
4B	57+03.31	54.50	577.37	577.49
4C	57+13.30	54.91	577.10	577.26
4D	57+23.30	55.32	576.84	577.02
4E	57+33.29	55.73	576.57	576.78
4F	57+43.28	56.14	576.30	576.53
4G	57+53.27	56.55	576.03	576.27
4H	57+63.26	56.96	575.76	576.00
4I	57+73.25	57.37	575.50	575.73
4J	57+83.25	57.78	575.23	575.45
4K	57+93.24	58.20	574.96	575.16
4L	58+03.23	58.65	574.69	574.86
4M	58+13.02	59.12	574.43	574.56
4N	58+22.77	59.63	574.16	574.26
4O	58+32.51	60.17	573.90	573.95
⌒ W BRG PIER 9 EB	58+38.99	60.54	573.72	573.74
⌒ PIER 9 EB	58+40.10	60.61	573.69	573.71
⌒ E BRG PIER 9 EB	58+41.21	60.67	573.66	573.68
4P	58+50.95	61.23	573.40	573.46
4Q	58+60.69	61.82	573.13	573.23
4R	58+70.42	62.44	572.86	573.00
4S	58+80.15	63.10	572.60	572.76
4T	58+89.87	63.78	572.33	572.51
4U	58+99.60	64.50	572.06	572.26
4V	59+09.31	65.24	571.78	571.99
4W	59+19.03	66.02	571.47	571.68
4X	59+28.74	66.82	571.15	571.36
4Y	59+38.44	67.66	570.84	571.03
4Z	59+48.14	68.52	570.52	570.69
4AA	59+57.84	69.42	570.20	570.35
4AB	59+67.53	70.35	569.89	570.00
4AC	59+77.21	71.30	569.57	569.65
⌒ BRG. E. ABUT. EB	59+88.49	72.46	569.21	569.23
⌒ EXP. JT.	59+90.12	72.63	569.15	569.17
BK E. ABUT. EB	59+92.25	72.85	569.08	569.11

BEAM E11

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
⌒ PIER 8 EB	56+82.12	61.16	577.78	577.80
⌒ E BRG. PIER 8 EB	56+83.33	61.22	577.75	577.77
4A	56+93.32	61.69	577.48	577.55
4B	57+03.31	62.15	577.21	577.33
4C	57+13.30	62.62	576.94	577.10
4D	57+23.29	63.09	576.67	576.86
4E	57+33.28	63.55	576.40	576.62
4F	57+43.26	64.02	576.13	576.37
4G	57+53.25	64.49	575.86	576.11
4H	57+63.24	64.96	575.59	575.84
4I	57+73.23	65.42	575.32	575.57
4J	57+83.22	65.89	575.06	575.28
4K	57+93.21	66.36	574.79	575.00
4L	58+03.20	66.87	574.52	574.70
4M	58+12.97	67.40	574.25	574.40
4N	58+22.69	67.96	573.99	574.09
4O	58+32.40	68.56	573.72	573.78
⌒ W BRG PIER 9 EB	58+39.95	69.04	573.51	573.53
⌒ PIER 9 EB	58+41.06	69.11	573.48	573.50
⌒ E BRG PIER 9 EB	58+42.17	69.18	573.45	573.47
4P	58+51.88	69.82	573.18	573.25
4Q	58+61.59	70.49	572.92	573.02
4R	58+71.29	71.19	572.65	572.79
4S	58+80.99	71.92	572.38	572.55
4T	58+90.68	72.68	572.11	572.31
4U	59+00.37	73.47	571.84	572.05
4V	59+10.06	74.29	571.55	571.77
4W	59+19.74	75.14	571.24	571.46
4X	59+29.41	76.02	570.92	571.14
4Y	59+39.09	76.93	570.60	570.81
4Z	59+48.75	77.87	570.29	570.47
4AA	59+58.41	78.84	569.97	570.13
4AB	59+68.07	79.85	569.65	569.77
4AC	59+77.72	80.88	569.33	569.42
⌒ BRG. E. ABUT. EB	59+90.14	82.25	568.93	568.95
⌒ EXP. JT.	59+91.77	82.43	568.88	568.90
BK E. ABUT. EB	59+93.90	82.68	568.81	568.83

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
	CHECKED - PJL	REVISED -
PLOT SCALE = 0.167' / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF SLAB ELEVATIONS 6 - UNIT 4 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-95 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	676
			CONTRACT NO. 62R23	
		ILLINOIS	FED. AID PROJECT	

BEAM E12

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☪ PIER 8 EB	56+82.12	68.69	577.62	577.64
☪ E BRG. PIER 8 EB	56+83.33	68.76	577.58	577.60
4A	56+93.32	69.28	577.31	577.39
4B	57+03.30	69.80	577.04	577.18
4C	57+13.29	70.33	576.77	576.95
4D	57+23.27	70.85	576.50	576.72
4E	57+33.26	71.37	576.23	576.48
4F	57+43.25	71.90	575.96	576.23
4G	57+53.23	72.42	575.69	575.97
4H	57+63.22	72.94	575.42	575.70
4I	57+73.21	73.47	575.15	575.43
4J	57+83.19	73.99	574.88	575.14
4K	57+93.18	74.52	574.61	574.85
4L	58+03.17	75.08	574.34	574.55
4M	58+12.91	75.67	574.08	574.24
4N	58+22.60	76.29	573.81	573.93
4O	58+32.29	76.94	573.54	573.61
☪ W BRG PIER 9 EB	58+40.91	77.54	573.30	573.32
☪ PIER 9 EB	58+42.02	77.62	573.27	573.29
☪ E BRG PIER 9 EB	58+43.13	77.70	573.24	573.26
4P	58+52.81	78.41	572.97	573.04
4Q	58+62.48	79.16	572.70	572.82
4R	58+72.15	79.93	572.43	572.59
4S	58+81.82	80.74	572.16	572.35
4T	58+91.48	81.57	571.89	572.11
4U	59+01.14	82.44	571.62	571.85
4V	59+10.79	83.33	571.33	571.56
4W	59+20.44	84.26	571.01	571.25
4X	59+30.09	85.21	570.69	570.93
4Y	59+39.72	86.20	570.37	570.60
4Z	59+49.36	87.21	570.05	570.26
4AA	59+58.98	88.26	569.73	569.91
4AB	59+68.60	89.33	569.41	569.55
4AC	59+78.22	90.44	569.10	569.19
☪ BRG. E. ABUT. EB	59+91.78	92.05	568.65	568.67
☪ EXP. JT.	59+93.41	92.24	568.60	568.62
BK E. ABUT. EB	59+95.53	92.50	568.53	568.55


INSIDE FACE OF SOUTH PARAPET EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Dead Load Deflection and Grinding
☪ PIER 8 EB	56+82.12	70.20	577.58	577.61
☪ E BRG. PIER 8 EB	56+83.33	70.26	577.55	577.57
4A	56+93.32	70.78	577.28	577.36
4B	57+03.30	71.31	577.01	577.15
4C	57+13.29	71.83	576.74	576.92
4D	57+23.27	72.35	576.47	576.69
4E	57+33.26	72.88	576.20	576.45
4F	57+43.25	73.40	575.93	576.20
4G	57+53.23	73.92	575.66	575.94
4H	57+63.22	74.45	575.39	575.67
4I	57+73.21	74.97	575.12	575.39
4J	57+83.19	75.49	574.85	575.11
4K	57+93.18	76.02	574.58	574.82
4L	58+03.17	76.58	574.31	574.52
4M	58+12.91	77.17	574.04	574.21
4N	58+22.60	77.79	573.78	573.90
4O	58+32.28	78.44	573.51	573.58
☪ W BRG PIER 9 EB	58+41.08	79.06	573.27	573.29
☪ PIER 9 EB	58+42.19	79.14	573.24	573.26
☪ E BRG PIER 9 EB	58+43.29	79.22	573.20	573.23
4P	58+52.97	79.93	572.94	573.01
4Q	58+62.64	80.67	572.67	572.78
4R	58+72.31	81.45	572.40	572.55
4S	58+81.97	82.25	572.13	572.31
4T	58+91.63	83.09	571.86	572.07
4U	59+01.28	83.95	571.59	571.82
4V	59+10.93	84.85	571.29	571.53
4W	59+20.58	85.77	570.97	571.21
4X	59+30.21	86.73	570.65	570.89
4Y	59+39.85	87.72	570.33	570.56
4Z	59+49.48	88.73	570.02	570.22
4AA	59+59.10	89.78	569.70	569.87
4AB	59+68.71	90.85	569.38	569.51
4AC	59+78.33	91.96	569.06	569.15
☪ BRG. E. ABUT. EB	59+92.04	93.59	568.61	568.63
☪ EXP. JT.	59+93.67	93.78	568.55	568.57
BK E. ABUT. EB	59+95.79	94.04	568.48	568.50

NOTES:

1. All Elevations and Offsets are in feet.
2. Offsets are measured with respect to the I-80 EB PGL. Negative offsets are left and positive are right of the PGL.

MODEL Default:
FILE NAME: p:\wsp\transystems-pw\hntb\com\transystems-pw\hntb\Documents\Projects_2018\CH4001\401180022\03-WSP\Structure\Structure\0998309-8325-5269-05A01.dgn

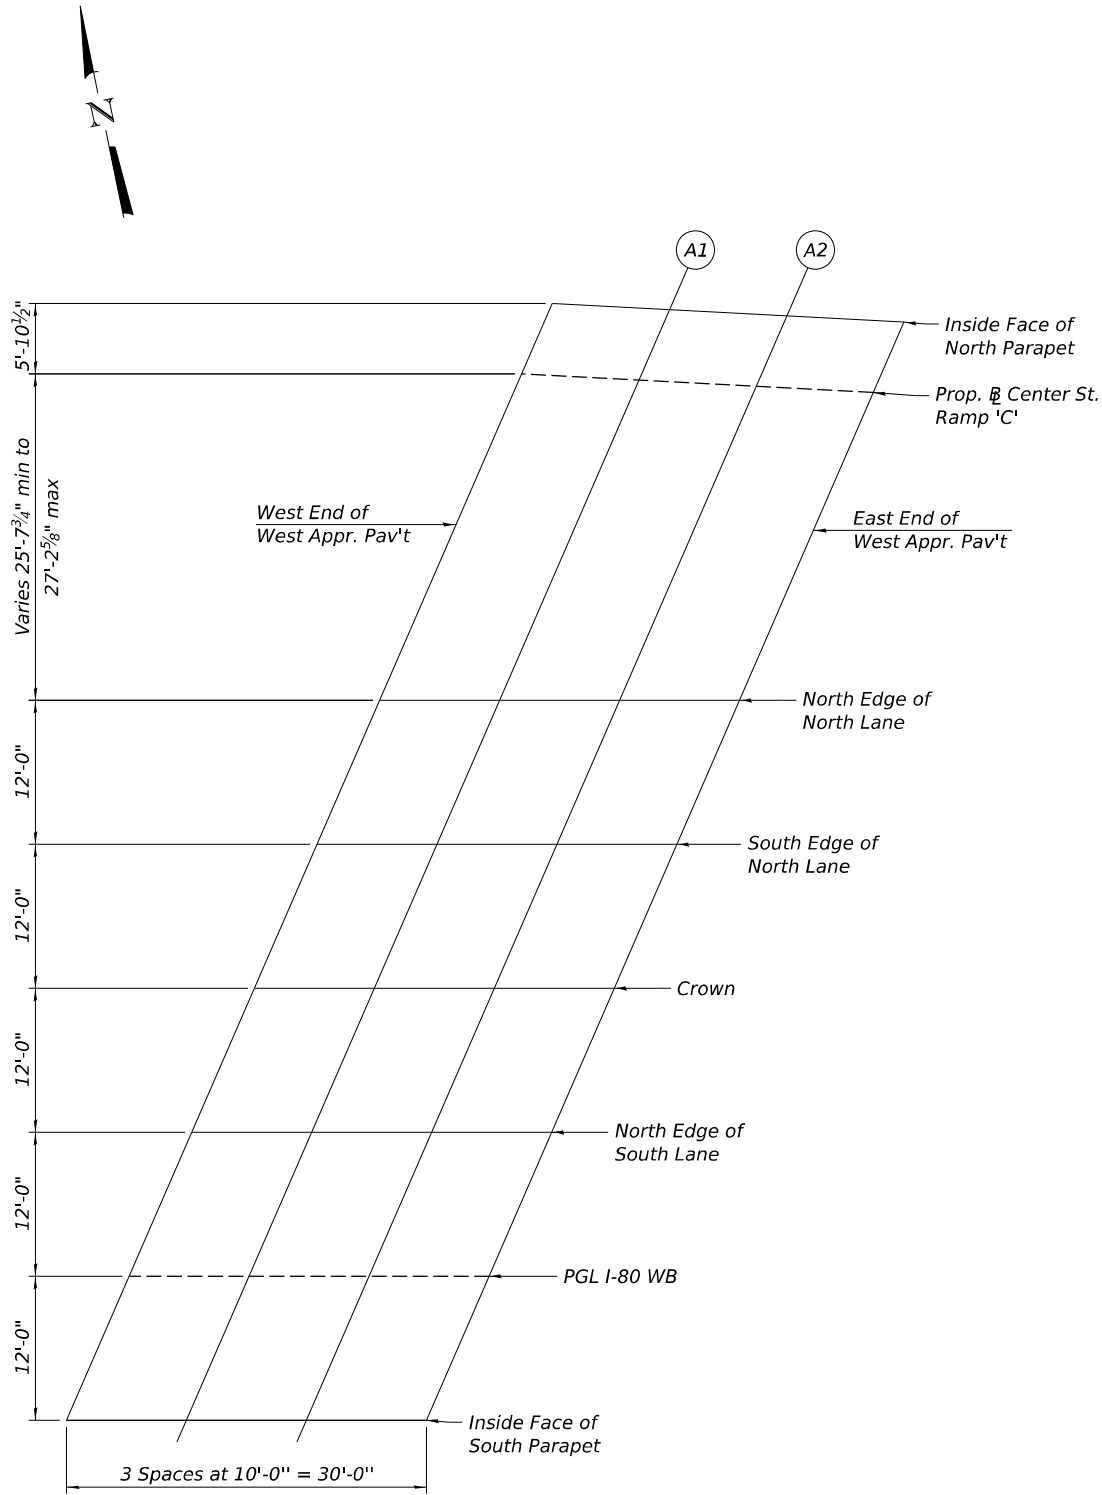

INSIDE FACE OF NORTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+32.48	-81.09	596.31	596.33
A1	38+42.48	-80.56	596.51	596.53
A2	38+52.48	-80.02	596.71	596.73
E End W Apr Pvt	38+62.48	-79.49	596.90	596.92

PROP. 8 CENTER RAMP C

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+30.10	-75.24	596.38	596.40
A1	38+40.10	-74.71	596.59	596.61
A2	38+50.10	-74.18	596.78	596.80
E End W Apr Pvt	38+60.10	-73.65	596.98	597.00

NORTH EDGE OF NORTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+19.00	-48.00	596.71	596.73
A1	38+29.00	-48.00	596.91	596.93
A2	38+39.00	-48.00	597.10	597.12
E End W Apr Pvt	38+49.00	-48.00	597.29	597.31

SOUTH EDGE OF NORTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+13.78	-36.00	596.49	596.51
A1	38+23.78	-36.00	596.71	596.73
A2	38+33.78	-36.00	596.93	596.95
E End W Apr Pvt	38+43.78	-36.00	597.15	597.17

CROWN

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+08.57	-24.00	596.24	596.26
A1	38+18.57	-24.00	596.49	596.51
A2	38+28.57	-24.00	596.73	596.75
E End W Apr Pvt	38+38.57	-24.00	596.98	597.00

NORTH EDGE OF SOUTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	38+03.35	-12.00	595.86	595.88
A1	38+13.35	-12.00	596.12	596.14
A2	38+23.35	-12.00	596.36	596.39
E End W Apr Pvt	38+33.35	-12.00	596.61	596.63

PGL I-80 WB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+98.13	0.00	595.55	595.57
A1	38+08.13	0.00	595.80	595.82
A2	38+18.13	0.00	596.06	596.08
E End W Apr Pvt	38+28.13	0.00	596.30	596.32

INSIDE FACE OF SOUTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+92.91	12.00	595.17	595.20
A1	38+02.91	12.00	595.43	595.45
A2	38+12.91	12.00	595.68	595.71
E End W Apr Pvt	38+22.91	12.00	595.93	595.95

PLAN

West Approach (WB)

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF WEST APPROACH SLAB ELEVATIONS - WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-97 OF 5-333 SHEETS


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	678
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				



WSP USA Inc.
30 N. LASALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
CHECKED - PJL	REVIS	ED -
PLOT SCALE = 16:0,0000 " = 1" / in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

MODEL Default:
FILE NAME: p:\wsp\transystems-pw\bartley.com\transystems-pw\hatched\Documents\Projects_2018\CH4001\401180022\03-WSP\CD\62023-RB-1-Sheets\Structure\0998309-82R23-S270-D6A02.dgn

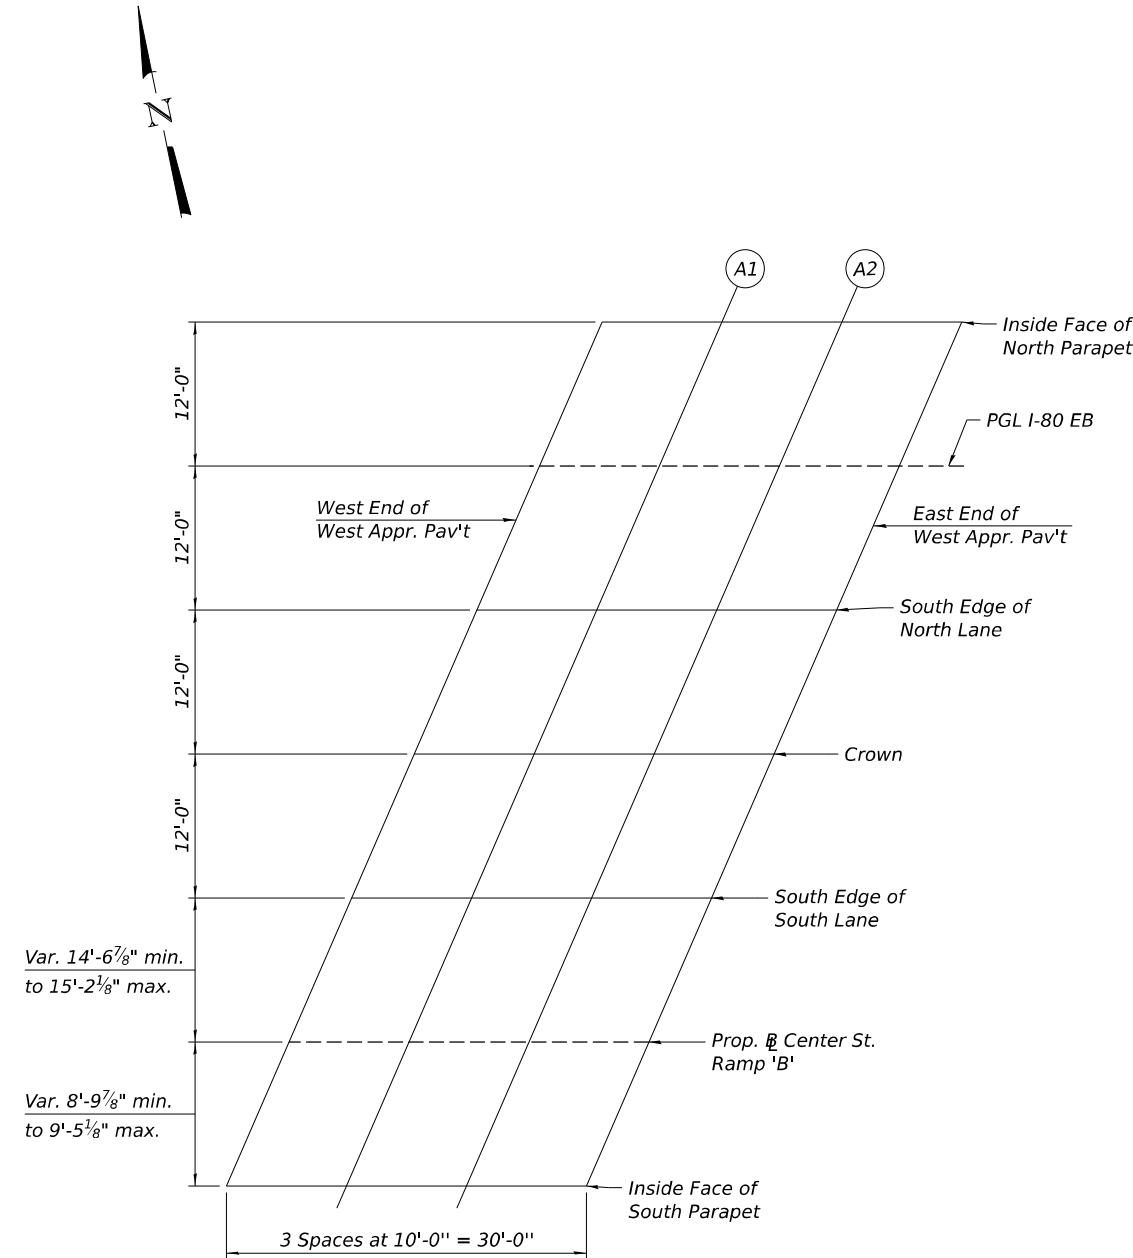

PLAN
West Approach (EB)

INSIDE FACE OF NORTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+85.09	-12.00	594.97	594.99
A1	37+95.09	-12.00	595.23	595.25
A2	38+05.09	-12.00	595.49	595.51
E End W Apr Pvt	38+15.09	-12.00	595.74	595.76

SOUTH EDGE OF NORTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+74.65	12.00	594.73	594.76
A1	37+84.65	12.00	595.02	595.04
A2	37+94.65	12.00	595.30	595.32
E End W Apr Pvt	38+04.65	12.00	595.58	595.60

SOUTH EDGE OF SOUTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+64.22	36.00	594.02	594.04
A1	37+74.22	36.00	594.33	594.35
A2	37+84.22	36.00	594.64	594.66
E End W Apr Pvt	37+94.22	36.00	594.95	594.97

INSIDE FACE OF SOUTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+53.78	60.00	593.27	593.29
A1	37+63.78	60.00	593.53	593.55
A2	37+73.78	60.00	593.84	593.86
E End W Apr Pvt	37+83.78	60.00	594.15	594.17

PGL I-80 EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+79.87	0.00	595.08	595.10
A1	37+89.87	0.00	595.34	595.36
A2	37+99.87	0.00	595.59	595.61
E End W Apr Pvt	38+09.87	0.00	595.85	595.87

CROWN

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+69.44	24.00	594.36	594.38
A1	37+79.44	24.00	594.67	594.69
A2	37+89.44	24.00	594.98	595.00
E End W Apr Pvt	37+99.44	24.00	595.29	595.31

PROP. B CENTER RAMP B

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End W Apr Pvt	37+57.89	51.18	593.55	593.57
A1	37+67.88	50.98	593.84	593.86
A2	37+77.88	50.78	594.15	594.17
E End W Apr Pvt	37+87.88	50.58	594.46	594.48

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TOP OF WEST APPROACH SLAB ELEVATIONS - EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**

SHEET 5-98 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	679
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				



WSP USA Inc.
30 N. LASALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - LAS	REVISED -
CHECKED - PJL	REVISIONS -	
PLOT SCALE = 16:0.0000 " = 1 in.	DRAWN - GM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -



PLAN

INSIDE FACE OF NORTH PARAPET

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.32</i>	<i>-78.23</i>	<i>564.25</i>	<i>564.27</i>
<i>A3</i>	<i>59+83.61</i>	<i>-79.04</i>	<i>563.89</i>	<i>563.91</i>
<i>A4</i>	<i>59+93.90</i>	<i>-79.82</i>	<i>563.54</i>	<i>563.56</i>
<i>E End E Apr Pvt</i>	<i>60+04.31</i>	<i>-80.58</i>	<i>563.19</i>	<i>563.21</i>

SOUTH EDGE OF RAMP C

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.42</i>	<i>-55.48</i>	<i>565.68</i>	<i>565.70</i>
<i>A3</i>	<i>59+83.62</i>	<i>-56.42</i>	<i>565.32</i>	<i>565.34</i>
<i>A4</i>	<i>59+93.82</i>	<i>-57.41</i>	<i>564.96</i>	<i>564.98</i>
<i>E End E Apr Pvt</i>	<i>60+04.18</i>	<i>-58.44</i>	<i>564.60</i>	<i>564.62</i>

SOUTH EDGE OF NORTH LANE

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.55</i>	<i>-24.00</i>	<i>567.31</i>	<i>567.33</i>
<i>A3</i>	<i>59+83.69</i>	<i>-24.00</i>	<i>567.00</i>	<i>567.03</i>
<i>A4</i>	<i>59+93.84</i>	<i>-24.00</i>	<i>566.70</i>	<i>566.72</i>
<i>E End E Apr Pvt</i>	<i>60+03.98</i>	<i>-24.00</i>	<i>566.40</i>	<i>566.42</i>

PGL I-80 WB

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.65</i>	<i>0.00</i>	<i>568.56</i>	<i>568.58</i>
<i>A3</i>	<i>59+83.71</i>	<i>0.00</i>	<i>568.25</i>	<i>568.27</i>
<i>A4</i>	<i>59+93.78</i>	<i>0.00</i>	<i>567.95</i>	<i>567.97</i>
<i>E End E Apr Pvt</i>	<i>60+03.85</i>	<i>0.00</i>	<i>567.65</i>	<i>567.67</i>

B CHICAGO RAMP C

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.35</i>	<i>-71.55</i>	<i>564.67</i>	<i>564.69</i>
<i>A3</i>	<i>59+83.60</i>	<i>-72.50</i>	<i>564.30</i>	<i>564.33</i>
<i>A4</i>	<i>59+93.85</i>	<i>-73.50</i>	<i>563.94</i>	<i>563.96</i>
<i>E End E Apr Pvt</i>	<i>60+04.27</i>	<i>-74.54</i>	<i>563.58</i>	<i>563.60</i>

NORTH EDGE OF NORTH LANE

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.50</i>	<i>-36.00</i>	<i>566.69</i>	<i>566.71</i>
<i>A3</i>	<i>59+83.68</i>	<i>-36.00</i>	<i>566.38</i>	<i>566.40</i>
<i>A4</i>	<i>59+93.87</i>	<i>-36.00</i>	<i>566.08</i>	<i>566.10</i>
<i>E End E Apr Pvt</i>	<i>60+04.05</i>	<i>-36.00</i>	<i>565.77</i>	<i>565.79</i>

NORTH EDGE OF SOUTH LANE

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.60</i>	<i>-12.00</i>	<i>567.94</i>	<i>567.96</i>
<i>A3</i>	<i>59+83.70</i>	<i>-12.00</i>	<i>567.63</i>	<i>567.65</i>
<i>A4</i>	<i>59+93.81</i>	<i>-12.00</i>	<i>567.32</i>	<i>567.34</i>
<i>E End E Apr Pvt</i>	<i>60+03.92</i>	<i>-12.00</i>	<i>567.02</i>	<i>567.04</i>

INSIDE FACE OF SOUTH PARAPET

<i>Location</i>	<i>Station</i>	<i>Offset</i>	<i>Theoretical Grade Elevations</i>	<i>Theoretical Grade Elevations Adjusted for Grinding</i>
<i>W End E Apr Pvt</i>	<i>59+73.69</i>	<i>12.00</i>	<i>568.32</i>	<i>568.34</i>
<i>A3</i>	<i>59+83.72</i>	<i>12.00</i>	<i>568.01</i>	<i>568.03</i>
<i>A4</i>	<i>59+93.75</i>	<i>12.00</i>	<i>567.71</i>	<i>567.73</i>
<i>E End E Apr Pvt</i>	<i>60+03.79</i>	<i>12.00</i>	<i>567.41</i>	<i>567.43</i>

MODEL Default: p:\projects\trans\scorp\pvt\hatched\Documents\Projects_2018\CH4001401180022\03-WSP\CAD\62023-RB-1-Sheets\Structure\0998309-42R23-5272-06A04.dgn
FILE NAME: p:\projects\trans\scorp\pvt\hatched\Documents\Projects_2018\CH4001401180022\03-WSP\CAD\62023-RB-1-Sheets\Structure\0998309-42R23-5272-06A04.dgn



WSP USA Inc.

30 N. LA SALLE STREET

SUITE 4000

CHICAGO, IL 60602

TEL: (312) 782-8150

FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED -	SJJ	REVISED -	
		CHECKED -	LAS	REVISED -	
PLOT SCALE	= 16:0,0000 " = 1 in.	DRAWN -	GM	REVISED -	
PLOT DATE	= 11/5/2025	CHECKED -	LAS	REVISED -	


STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

TOP OF EAST APPROACH SLAB ELEVATIONS EB

STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	681
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

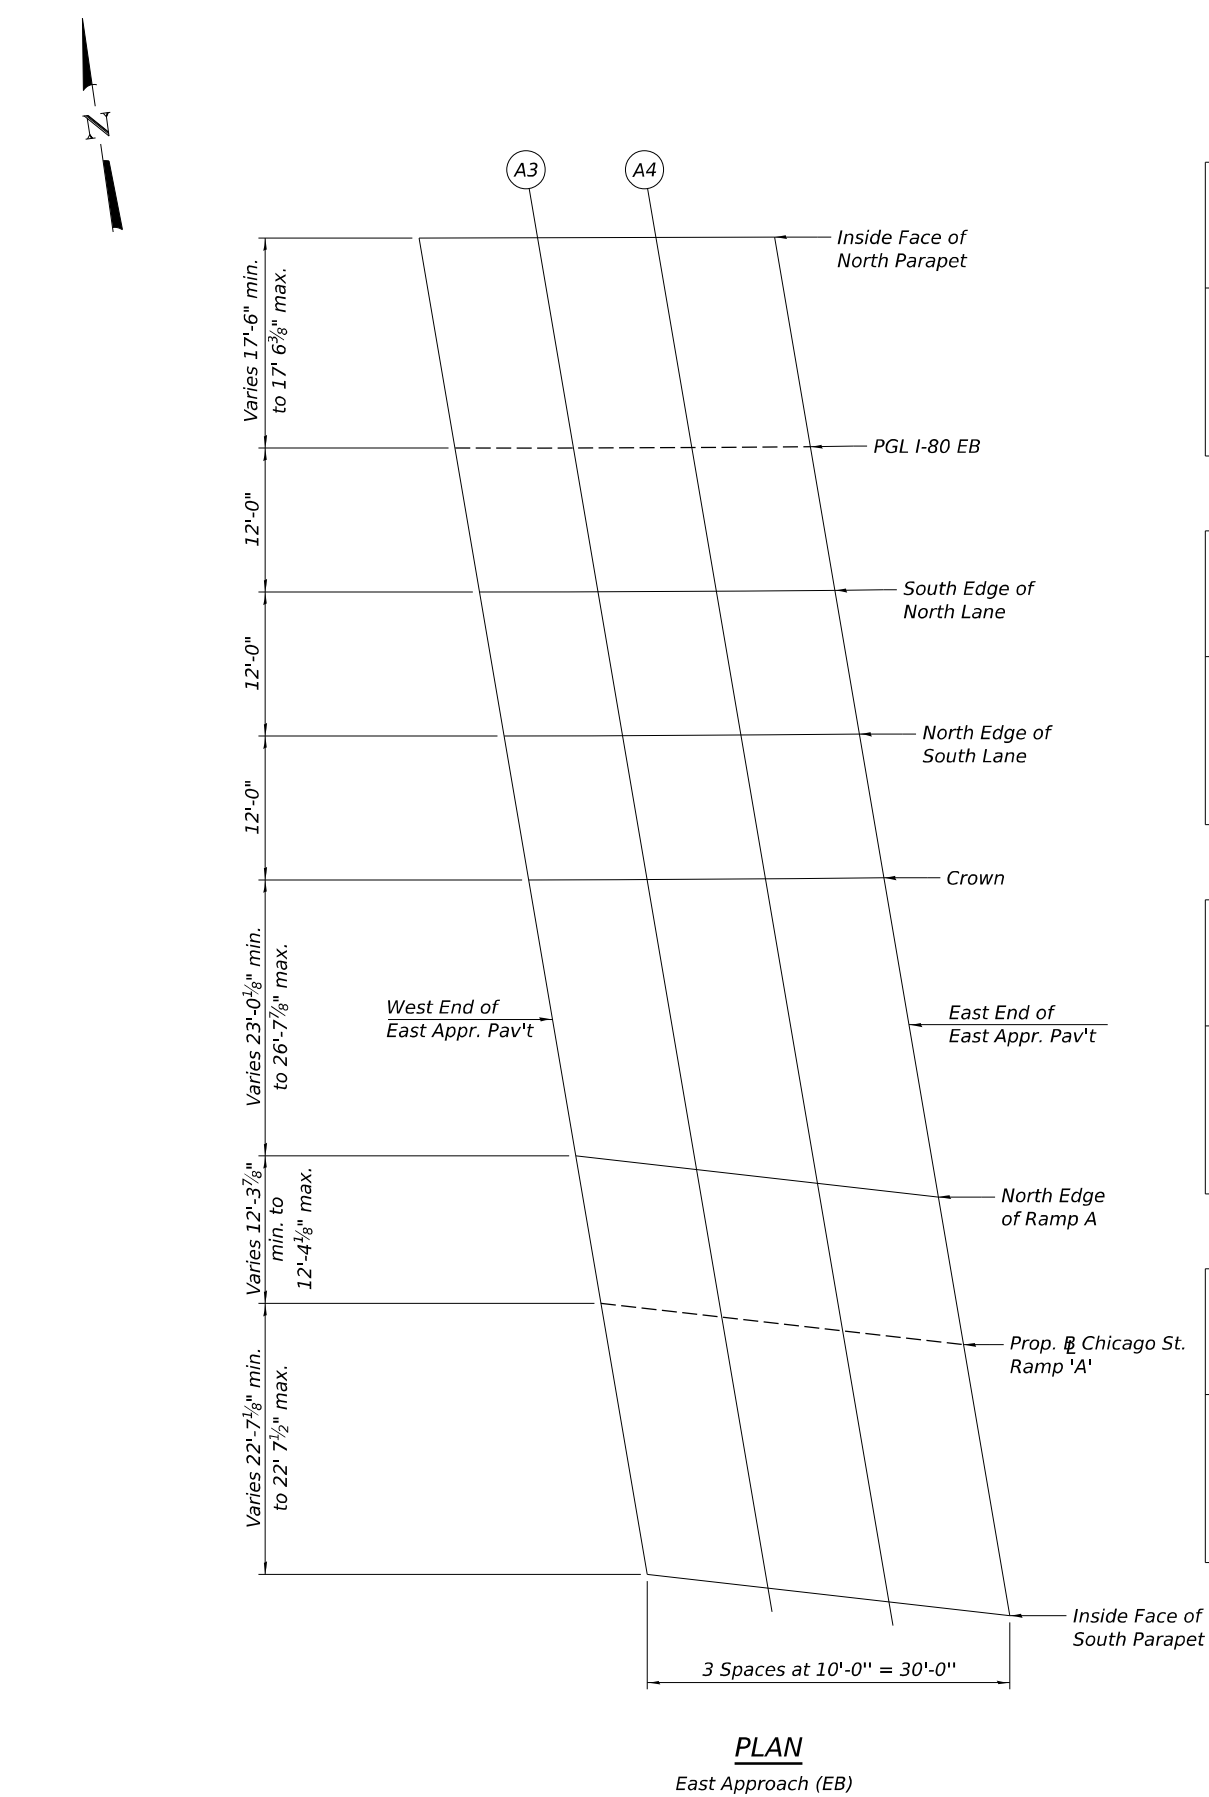

INSIDE FACE OF NORTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+75.62	-17.50	567.59	567.61
A3	59+85.62	-17.53	567.29	567.31
A4	59+95.61	-17.53	566.98	567.00
E End E Apr Pvt	60+05.22	-17.50	566.70	566.72

SOUTH EDGE OF NORTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+80.83	12.00	568.96	568.98
A3	59+90.73	12.00	568.67	568.69
A4	60+00.63	12.00	568.37	568.39
E End E Apr Pvt	60+10.15	12.00	568.09	568.11

CROWN

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+84.99	36.00	570.09	570.11
A3	59+94.82	36.00	569.79	569.81
A4	60+04.65	36.00	569.50	569.52
E End E Apr Pvt	60+14.09	36.00	569.22	569.24

RAMP A

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+91.01	71.33	569.16	569.18
A3	60+00.67	72.50	568.84	568.86
A4	60+10.32	73.71	568.54	568.56
E End E Apr Pvt	60+20.37	74.99	568.23	568.25

PGL I-80 EB

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+78.72	0.00	568.40	568.42
A3	59+88.66	0.00	568.10	568.12
A4	59+98.60	0.00	567.80	567.82
E End E Apr Pvt	60+08.16	0.00	567.52	567.54

NORTH EDGE OF SOUTH LANE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+82.92	24.00	569.53	569.55
A3	59+92.78	24.00	569.23	569.25
A4	60+02.65	24.00	568.93	568.95
E End E Apr Pvt	60+12.13	24.00	568.65	568.68


NORTH EDGE OF RAMP A

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+88.93	59.01	569.51	569.53
A3	59+98.62	60.17	569.19	569.21
A4	60+08.31	61.37	568.88	568.90
E End E Apr Pvt	60+18.40	62.65	568.56	568.59

INSIDE FACE OF SOUTH PARAPET

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted for Grinding
W End E Apr Pvt	59+94.79	93.92	568.52	568.54
A3	60+04.38	95.11	568.21	568.23
A4	60+13.97	96.32	567.90	567.92
E End E Apr Pvt	60+23.95	97.62	567.69	567.71

MODEL Default:
FILE NAME: p:\proj\trans\systems-pw\hntb\com\trans\corp-pw\hntb\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1\Sheet\Structural\0998309-8323-S301-DC1.01.dgn

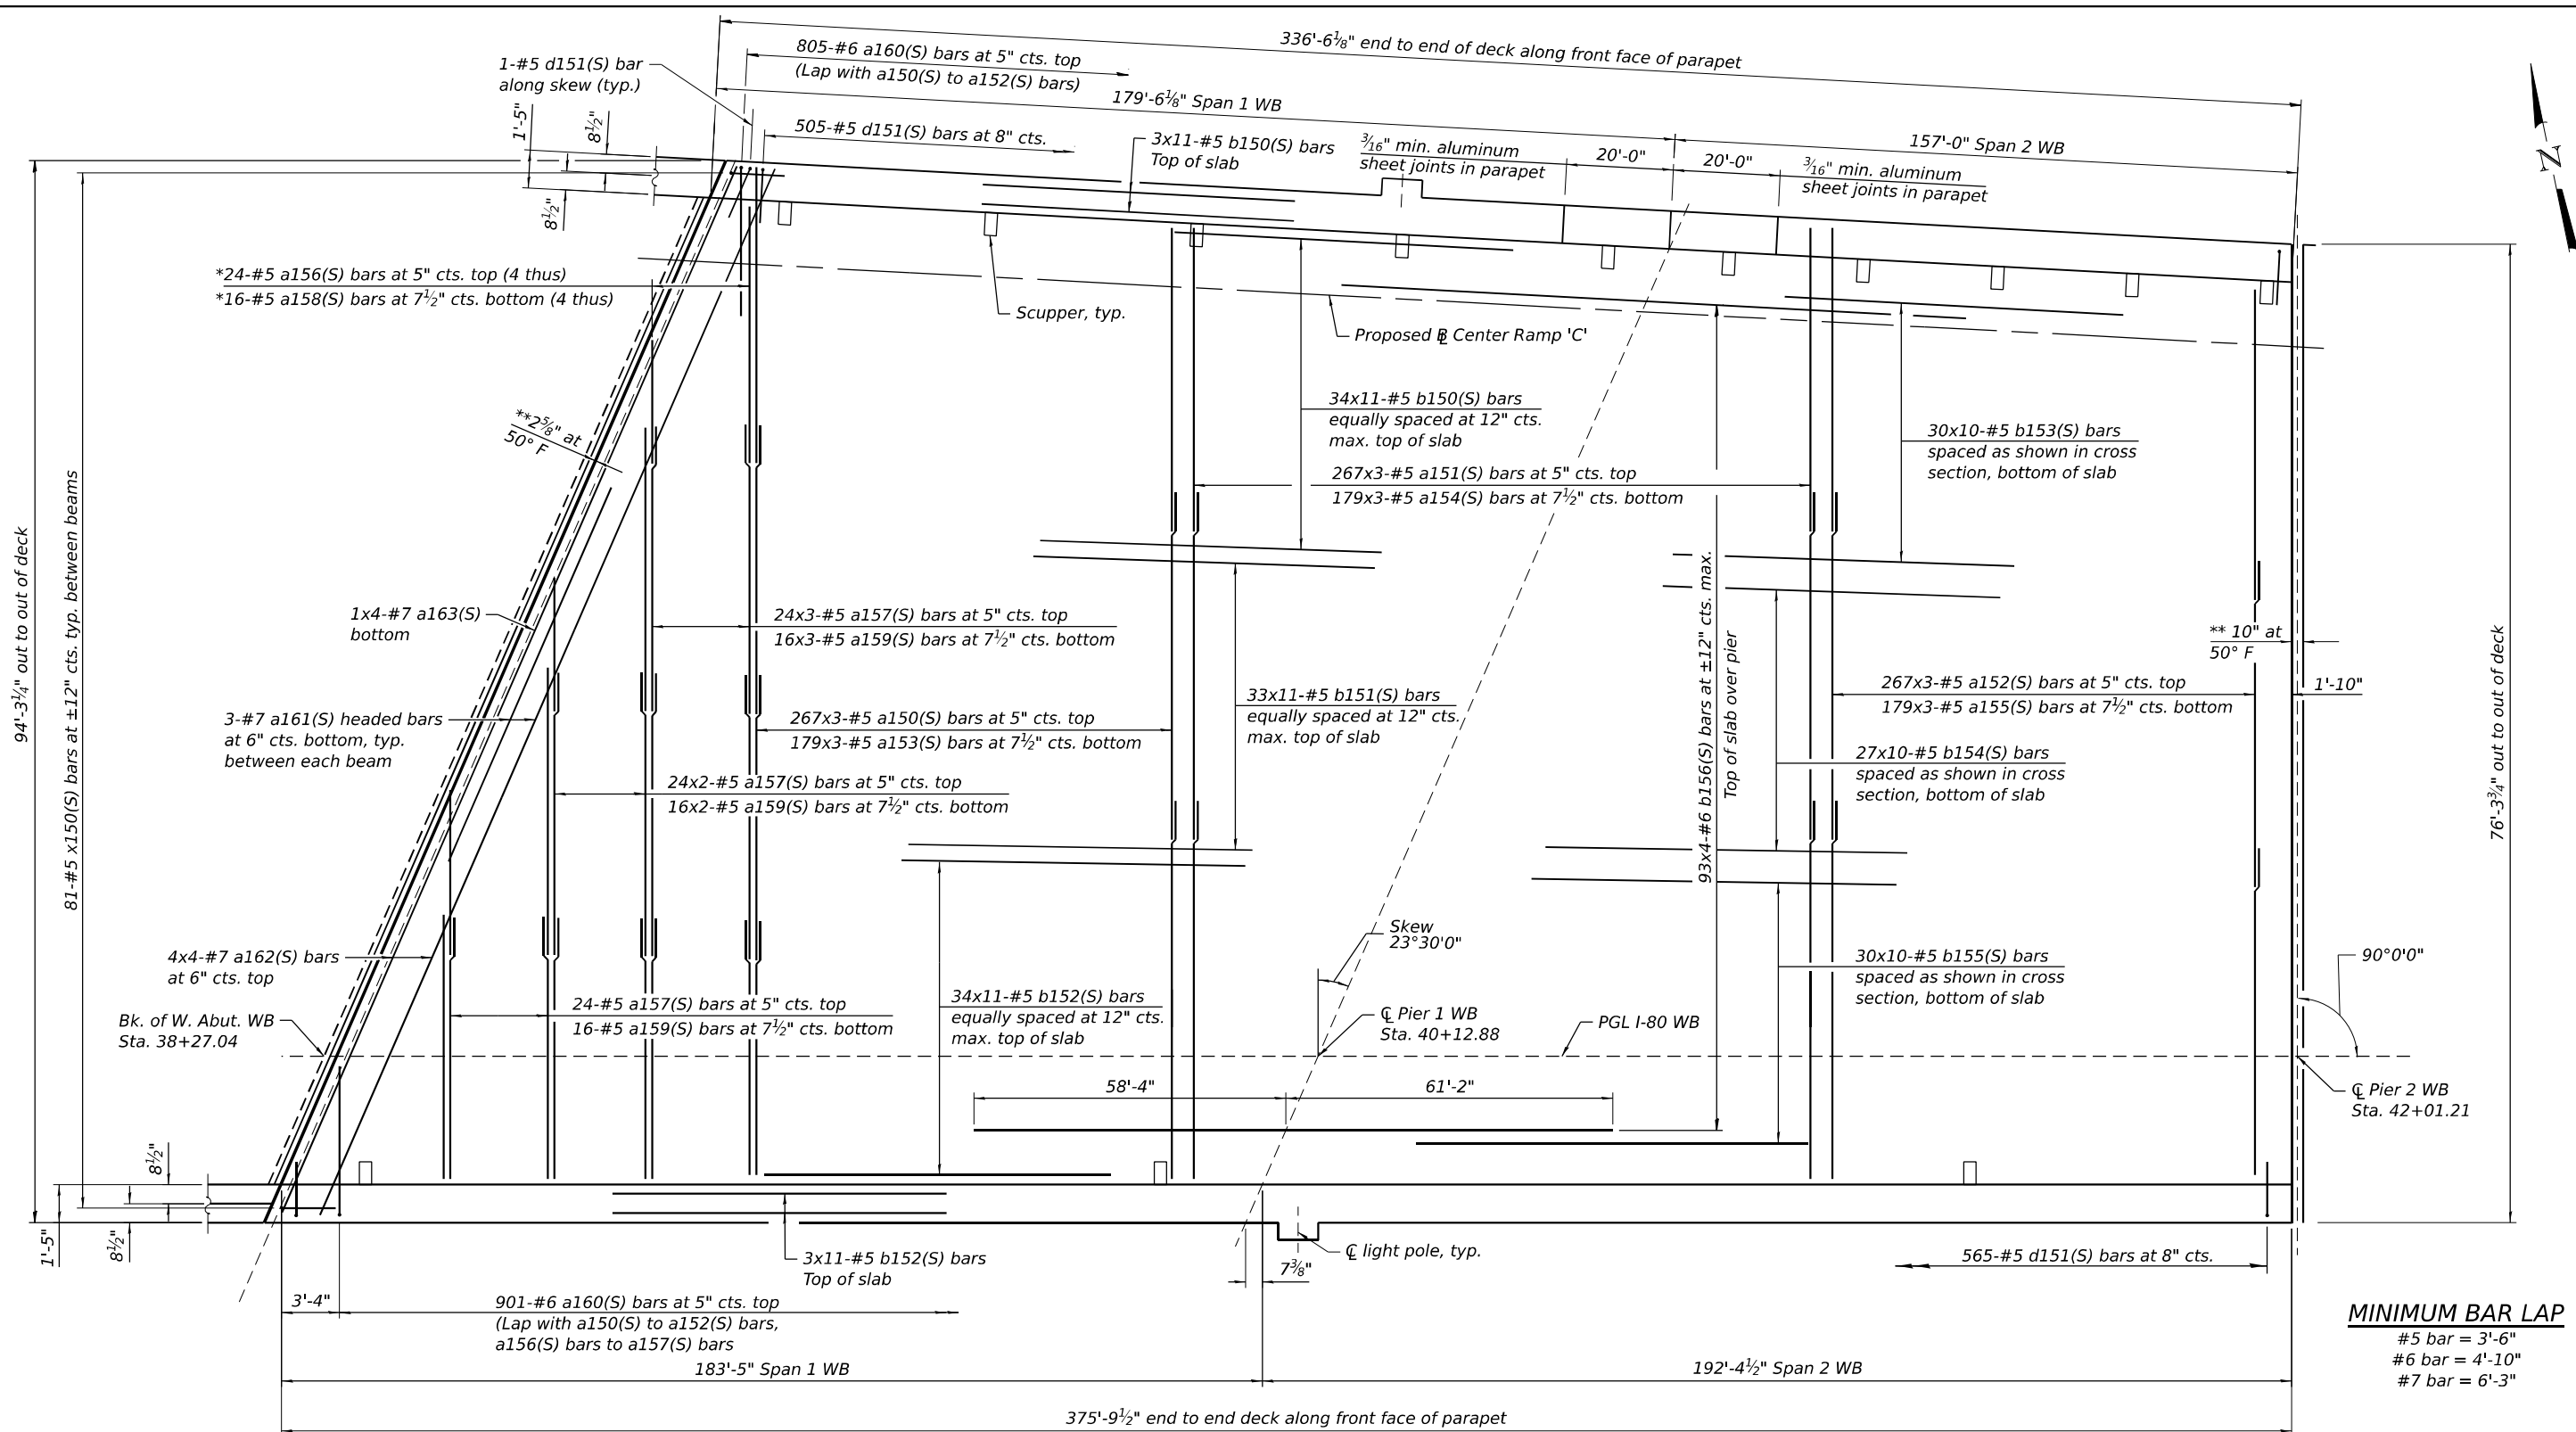

PLAN - UNIT 1 WB


* See Field Cutting Diagram on sheet S-104

** Dimension showing concrete opening. For joint opening and bars near joint see sheet S-153 and S-155

- NOTES:**
- See sheet S-104 for superstructure details and Bill of Material.
 - Offsets for scupper and light pole locations are measured off of WB PGL.
 - Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
 - For Cross Section see sheet S-102.

MINIMUM BAR LAP
#5 bar = 3'-6"
#6 bar = 4'-10"
#7 bar = 6'-3"

 WSP USA Inc. 30 N. LA SALLE STREET SUITE 4000 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614		DESIGNED - PK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DECK PLAN - UNIT 1 WB		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CHECKED - LAS		CHECKED - LAS	REVISED -		STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB		I-80	FAI 80 21 STRUCTURE 2	WILL	1230	682
	PLOT SCALE = 32,000 ' / in.		DRAWN - BK	REVISED -		SHEET S-101 OF S-333 SHEETS		CONTRACT NO. 62R23				
	PLOT DATE = 11/5/2025		CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

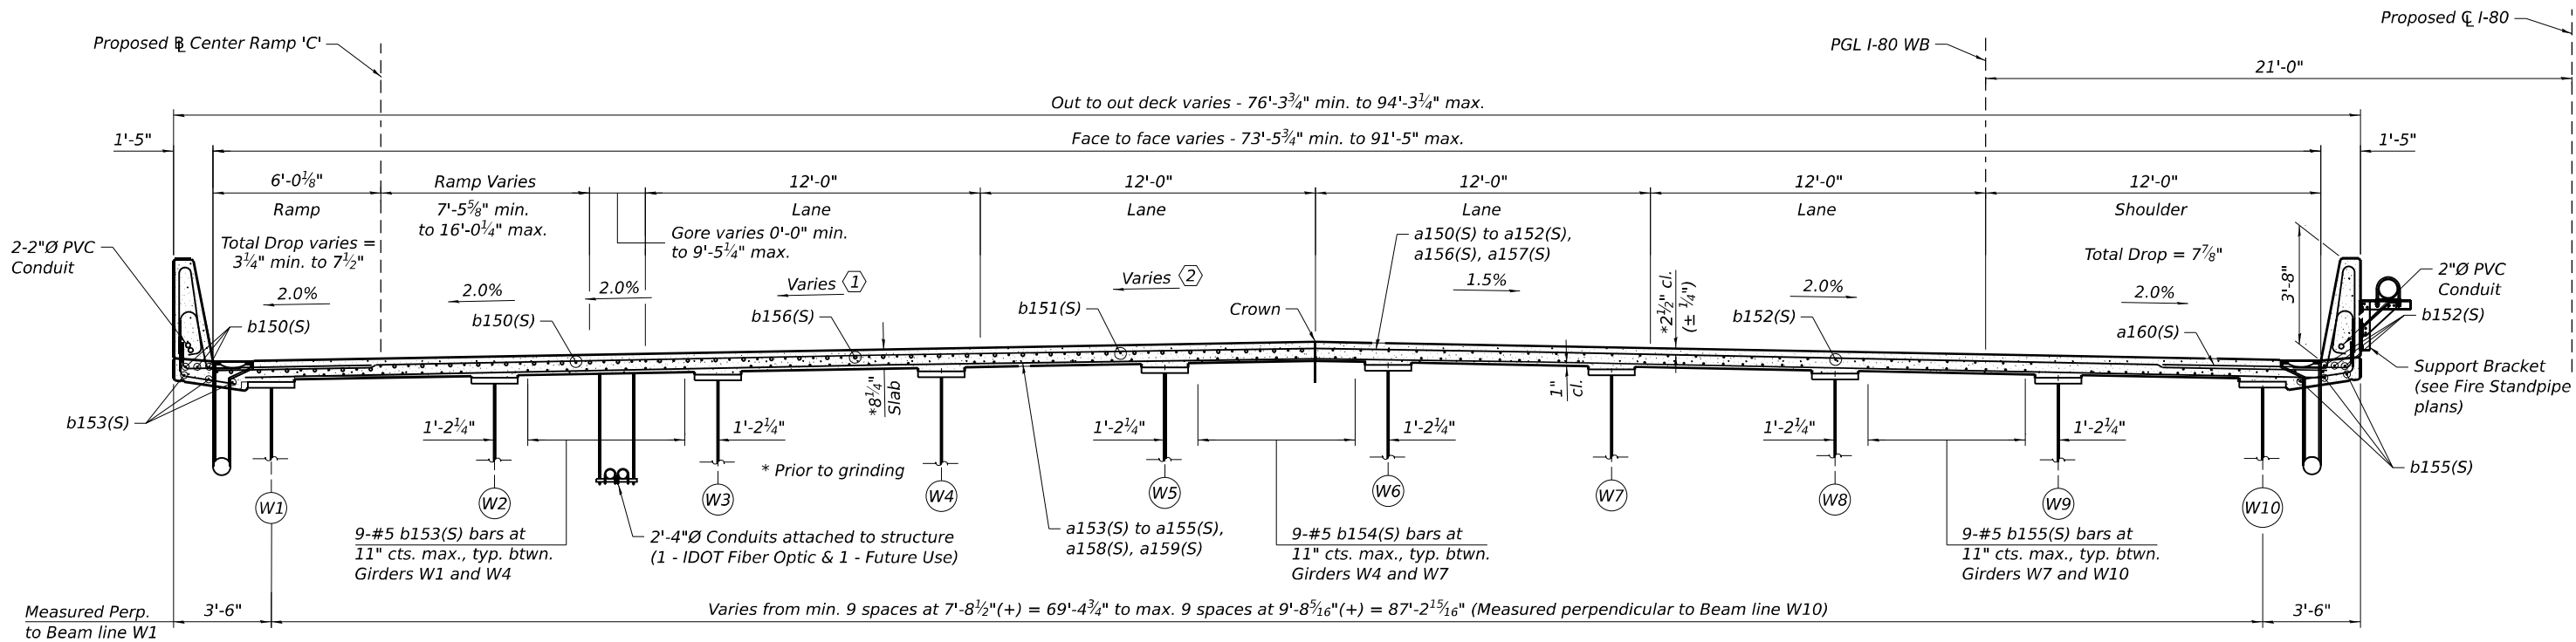

CROSS SLOPE TRANSITION DATA



Note: Positive (+) slopes upward from Lt. to Rt.,
Negative (-) slopes downward from Lt. to Rt.

- ① Varies from -2.00% at Sta. 37+67 to +2.00% at Sta. 39+54
- ② Varies from -2.00% at Sta. 37+67 to +1.50% at Sta. 39+32

NEAR PIER

CROSS SECTION - UNIT 1 WB
(Looking East)

NEAR MIDSPAN

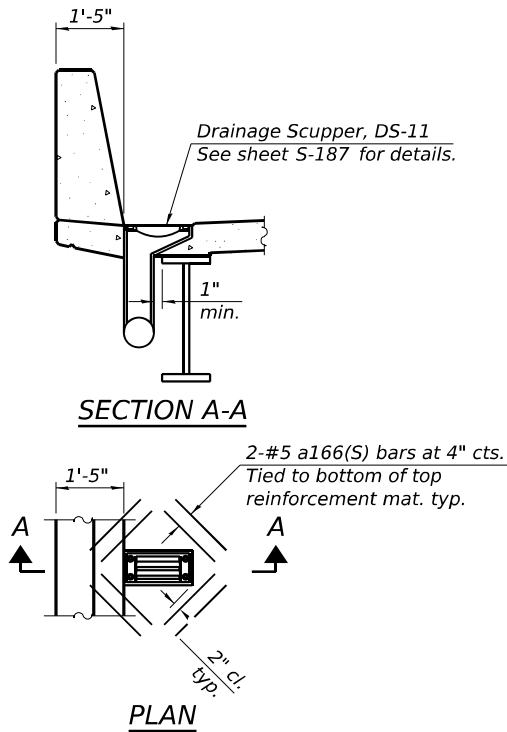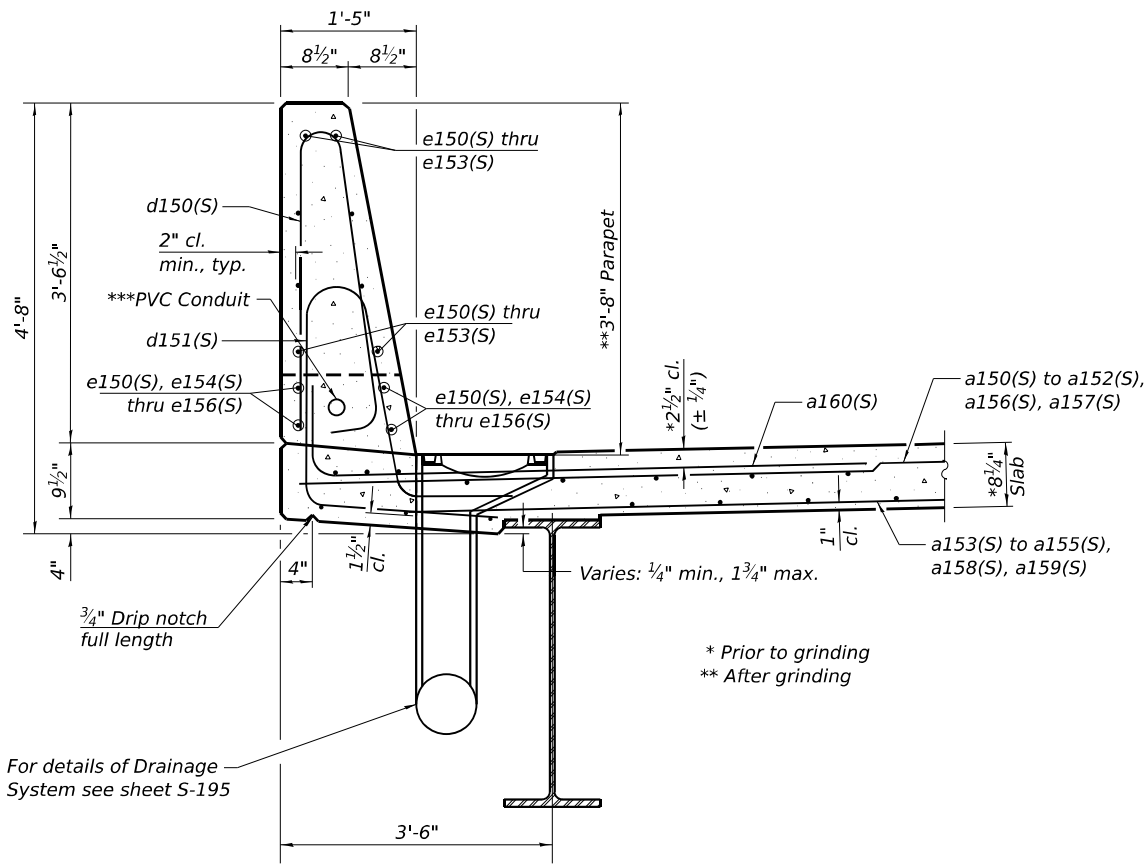

REINFORCEMENT AT
DRAINAGE SCUPPERS

MODEL: Default
FILE NAME: p:\projects\trans\scup\p1\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1\Sheet\Structure\0998309-42R23-5302-DC1.02.dgn



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - PK	REVISED -
	CHECKED - LAS	REVISED -
PLOT SCALE = 6,000' / in.	DRAWN - BK	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DECK CROSS SECTION AND PARAPET - UNIT 1 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB


SHEET S-102 OF S-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	683
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				


UNIT 1 WB
SUPERSTRUCTURE
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
a150(S)	801	#5	33'-8"	
a151(S)	801	#5	31'-8"	
a152(S)	813	#5	29'-8"	
a153(S)	537	#5	32'-10"	
a154(S)	537	#5	30'-10"	
a155(S)	549	#5	28'-10"	
a156(S)	48	#5	29'-2"	
a157(S)	144	#5	26'-2"	
a158(S)	32	#5	28'-6"	
a159(S)	96	#5	25'-6"	
a160(S)	1,706	#6	8'-4"	
a161(S)	27	#7	10'-4"	
a162(S)	16	#7	30'-3"	
a163(S)	4	#7	29'-8"	
a164(S)	9	#6	7'-5"	
a165(S)	2	#6	3'-2"	
a166(S)	104	#5	1'-6"	
b150(S)	407	#5	34'-11"	
b151(S)	363	#5	36'-2"	
b152(S)	407	#5	37'-5"	
b153(S)	300	#5	38'-2"	
b154(S)	270	#5	39'-5"	
b155(S)	300	#5	40'-10"	
b156(S)	372	#6	33'-6"	
d150(S)	1,071	#5	7'-0"	
d151(S)	1,071	#5	8'-3"	
d152(S)	6	#6	5'-3"	
d153(S)	12	#6	8'-11"	
e150(S)	112	#4	19'-7"	
e151(S)	56	#4	19'-3"	
e152(S)	72	#4	18'-10"	
e153(S)	72	#4	17'-10"	
e154(S)	20	#4	33'-10"	
e155(S)	36	#4	36'-5"	
e156(S)	20	#4	34'-7"	
x150(S)	81	#5	5'-11"	
x151(S)	87	#5	6'-10"	
x152(S)	106	#5	6'-7"	
Concrete Superstructure			Cu Yd.	924.4
Reinforcement Bars, Stainless Steel			Pound	288,000
Protective Coat			Sq. Yd.	3,615
Bridge Deck Grooving (Longitudinal)			Sq. Yd.	2,458
Diamond Grinding (Bridge Section)			Sq. Yd.	3,140

Note: Bar terminators paid for separately.
See Total Bill of Materials.

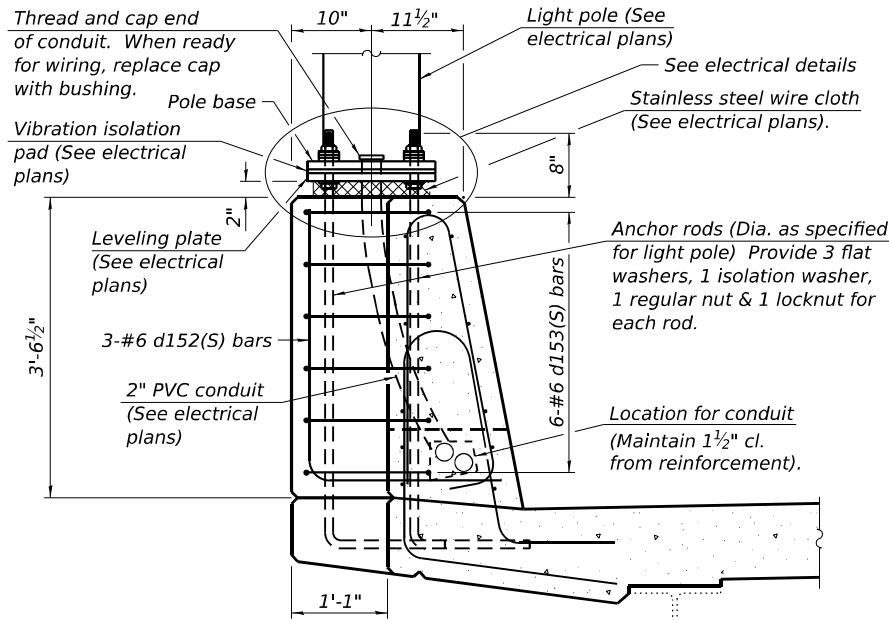


SECTION A-A

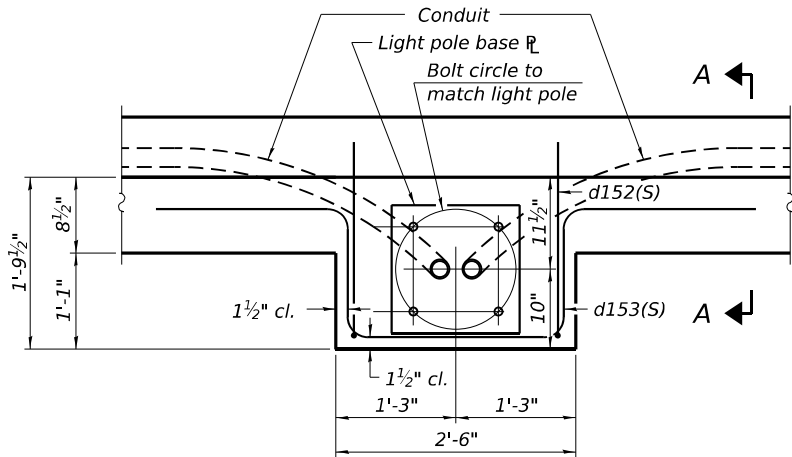


PLAN

Note:
Cost of anchor rods is included
with Concrete Superstructure.


LIGHT POLE DETAILS




BAR d152(S)




BAR d153(S)




BAR x150(S)

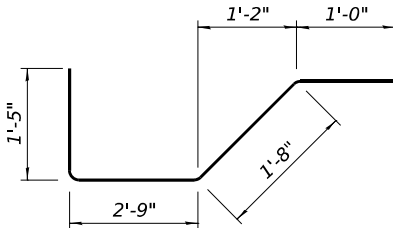


BAR x151(S)



BAR x152(S)




ANCHOR ROD

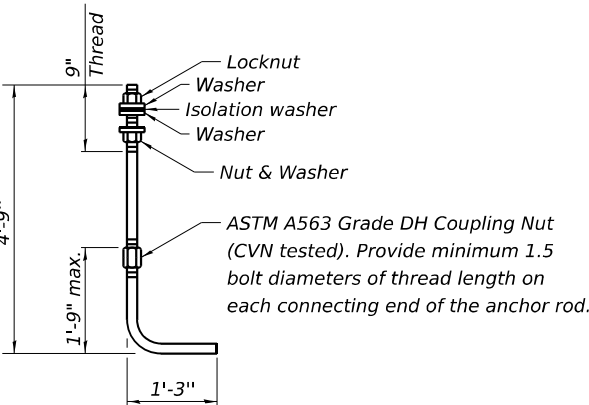


ALTERNATE
ANCHOR ROD


Diameter as specified for light poles.
(ASTM F 1554 Grade 105) Full length
hot dipped galvanized.

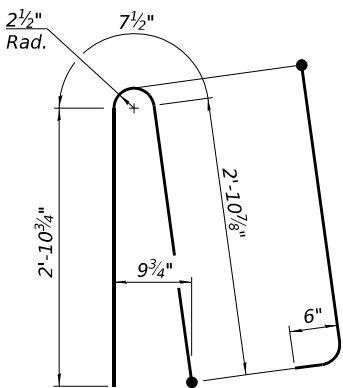


BAR d150(S)

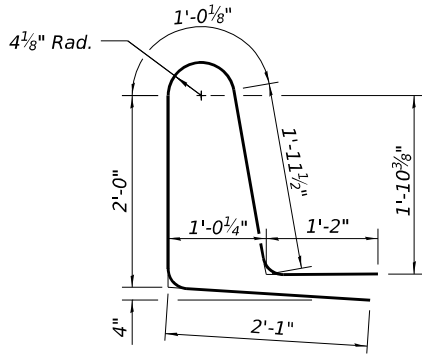

BAR d151(S)




BAR a160(S)




HEADED BAR a161(S)

(Headed. 54-#7 Bar terminators)




HEADED BAR a164(S)

(Headed. 18-#6 Bar terminators)



HEADED BAR a165(S)

(Headed. 4-#6 Bar terminators)

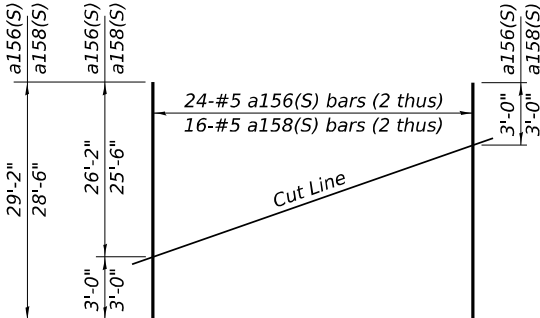

FIELD CUTTING DIAGRAM

Order a156(S) and a158(S) bars full length.
Cut as shown and use remainder of
bars as indicated on plan.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUPERSTRUCTURE DETAILS - UNIT 1 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-104 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	685
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

USER NAME = USSJ696614	DESIGNED - PK	REVISED -
	CHECKED - LAS	REVISED -
PLOT SCALE = 6,000' / in.	DRAWN - BK	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

350'-10³/₈" end to end of deck (measured along inside face of parapet)

183'-5" Span 1 EB

167'-5³/₈" Span 2 EB

843-#6 a102(S) bars at 5" cts. top
(Lap with a100(S) bars)

526-#5 d101(S) bars at 8" cts.

3x11-#5 b100(S) bars
Top of slab

3/16" min. aluminum
sheet joints in parapet

20'-0"

20'-0"

7³/₈"

3/16" min. aluminum
sheet joints in parapet

1-#5 d101(S) bar
along skew

8 1/2"

8 1/2"

1'-5"

8 1/2"

74'-10" out to out deck
typ. between beams

63-#5 x100(S) bars at ±12" cts.

* #5 a106(S) bars at 5" cts., top
* #5 a107(S) bars at 7 1/2" cts., bottom

1x2-#7 a104(S)
bottom

2x4-#7 a105(S) bars
at 6" cts. top

3-#7 a103(S) headed bars
at 6" cts. bottom, typ.
between each beam

Bk. of Abut. EB
Sta. 38+08.78

** 2 5/8" at 1
50° F

Scupper, typ.

23x11-#5 b100(S) bars
equally spaced at 12" cts.
top of slab

PGL I-80 EB

Skew
23°30'0"

CL Pier 1 EB
Sta. 39+94.62

72x4-#6 b106(S) bars at ±12" cts.
Top of slab over pier

23x10-#5 b103(S) bars
spaced as shown in cross
section, bottom of slab

90°0'0"

CL Pier 2 EB
Sta. 41+68.45

** 10 at
50° F

1'-10"

30x10-#5 b104(S) bars
spaced as shown in cross
section, bottom of slab

23x10-#5 b105(S) bars
spaced as shown in cross
section, bottom of slab

839x2-#5 a100(S) bars at 5" cts. top
562x2-#5 a101(S) bars at 7 1/2" cts. bottom

27x11-#5 b101(S) bars
equally spaced at 12" cts.
top of slab

36-#5 a100(S) bars at 5" cts., top
24-#5 a101(S) bars at 7 1/2" cts., bottom

23x11-#5 b102(S) bars
equally spaced at 12" cts.
top of slab

61'-1"

67'-7"

3x11-#5 b102(S) bars
Top of slab

CL light pole, typ.

3'-4"

911-#6 a102(S) bars at 5" cts. top
(Lap with a100(S) or a106(S) bars)

187'-5" Span 1 EB


198'-9¹/₈" Span 2 EB

574-#5 d101(S) bars at 8" cts.


382'-2¹/₈" end to end deck (measured along inside face of parapet)

MINIMUM BAR LAP
#5 bar = 3'-6"
#6 bar = 4'-10"
#7 bar = 6'-3"



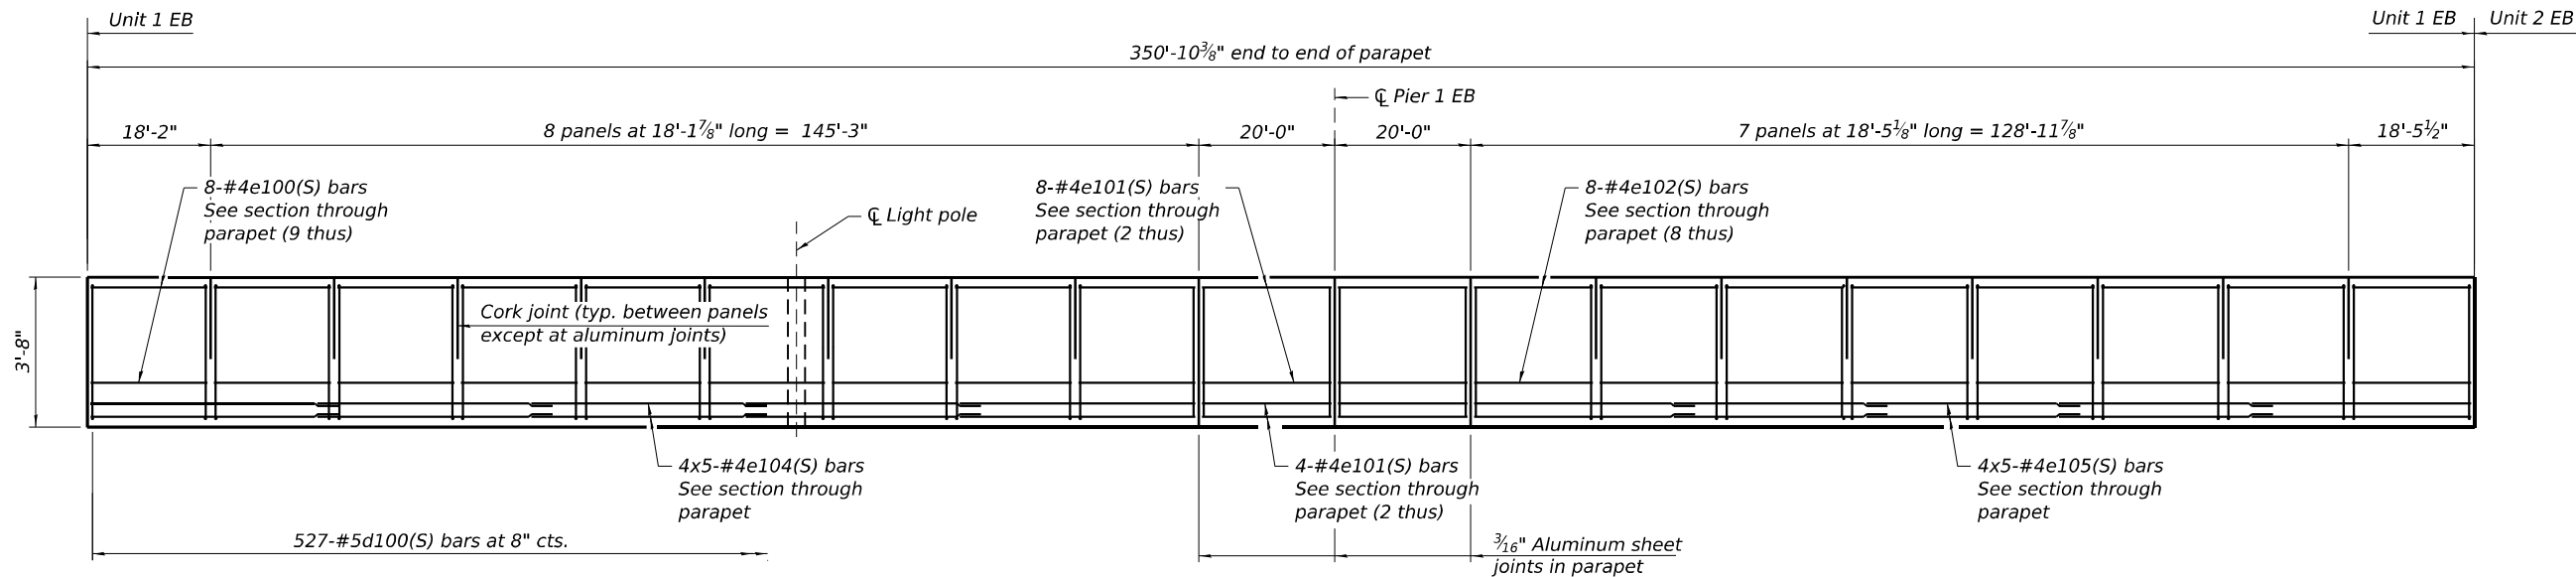


INSIDE ELEVATION OF NORTH PARAPET

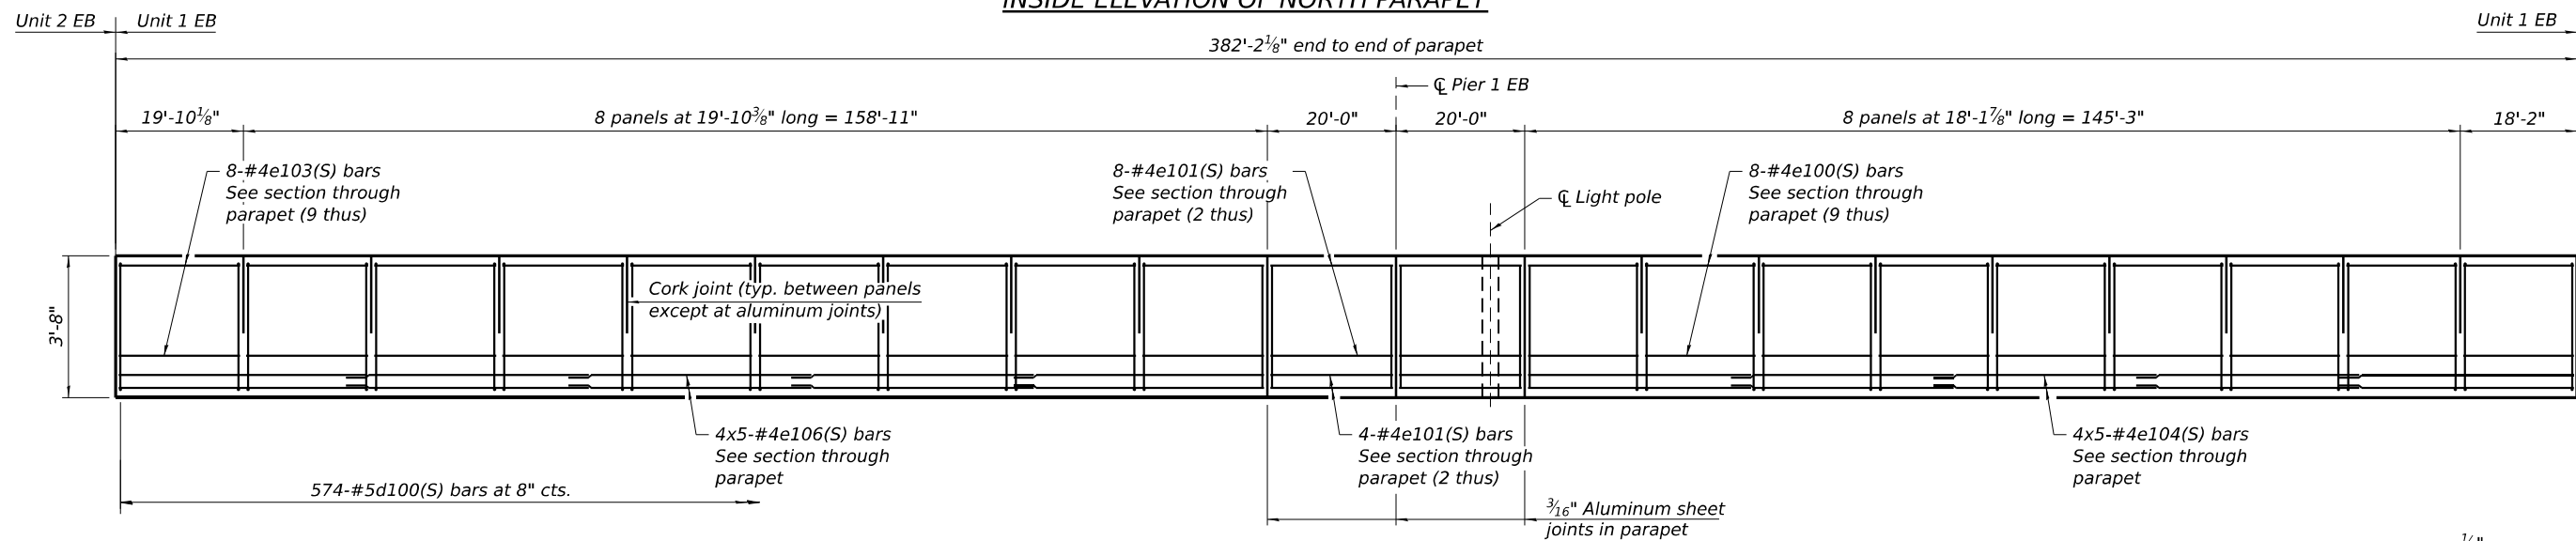

INSIDE ELEVATION OF SOUTH PARAPET

MINIMUM BAR LAP
#4 bar = 2'-5"

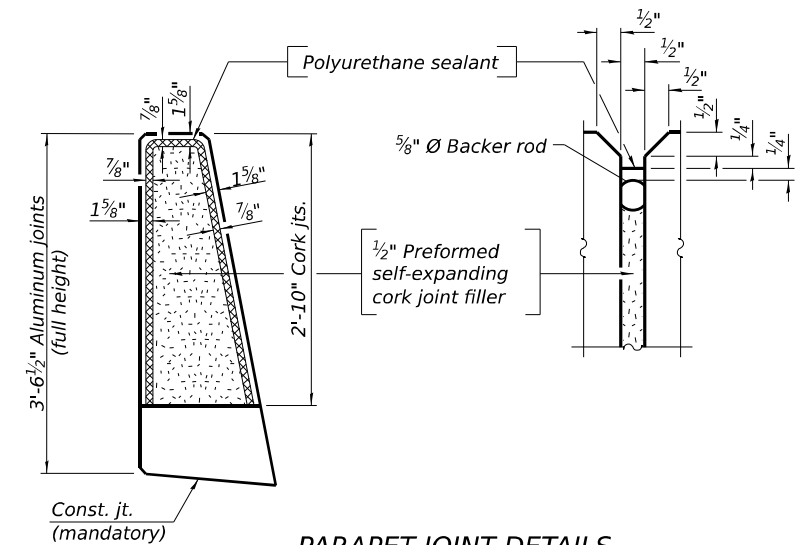

Notes:

The 3/16" minimum aluminum sheet shall be ASTM B 209 alloy 3003-H14 and coated with 5 mils of either bitumen paint or spray paint to minimize reaction with wet concrete. Cost included with Concrete Superstructure.

The Polyurethane Sealant shall be according to Article 1050.04 of the Std. Spec. and the color shall be gray.

MODEL Default: wsp\transystems-pw\bartley.com\transystems\corp\pw\labeled\Documents\Projects_2018\CH4001401180022\03-WSP\CD\62R23-RB-1\Sheet\Structure\0998309-62R23-5307-DCL07.dgn

wsp

WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684


USER NAME = USSJ696614	DESIGNED - PK	REVISED -
	CHECKED - LAS	REVISED -
PLOT SCALE = 28,000 ' / in.	DRAWN - BK	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**PARAPET ELEVATION - UNIT 1 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB**

SHEET S-107 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	688
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

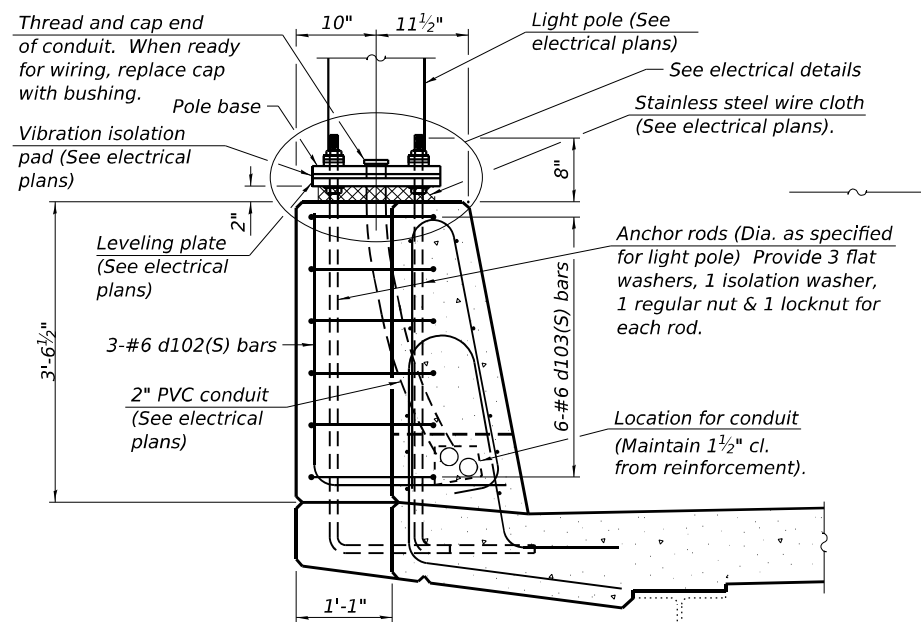


SECTION A-A

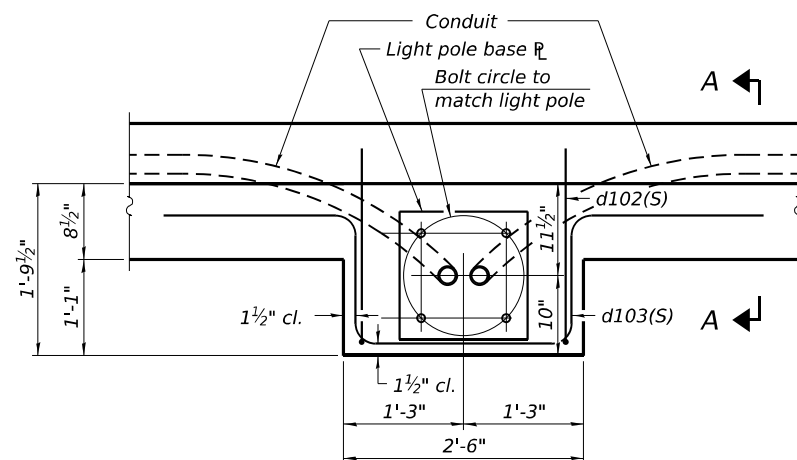

PLAN

Note: PLAN
Cost of anchor rods is included
with Concrete Superstructure.


LIGHT POLE DETAILS

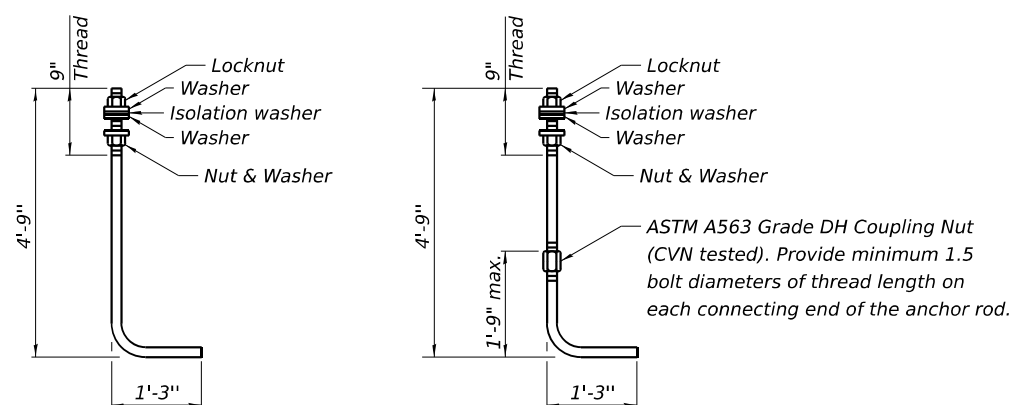


ANCHOR ROD

ALTERNATE
ANCHOR ROD

*Diameter as specified for light poles.
(ASTM F 1554 Grade 105) Full length
hot dipped galvanized.*

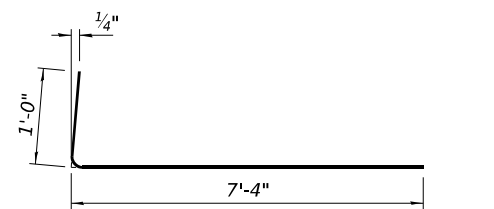


BAR a102(S)




HEADED BAR a103(S)

(Headed. 42-#7 Bar terminators)






HEADED BAR a109(S)

(Headed. 14-#6 Bar terminators,




HEADED BAR a110(S)


(Headed. 4-#6 Bar terminators)

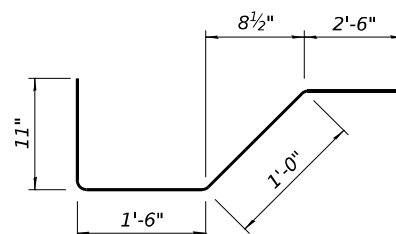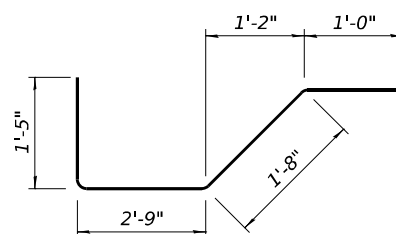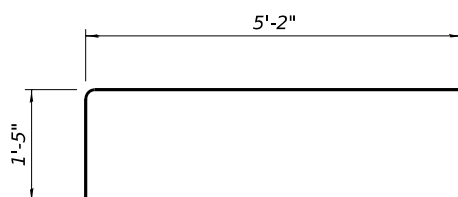
$$BAR \times 100(S)$$

$$BAR \times 101(S)$$

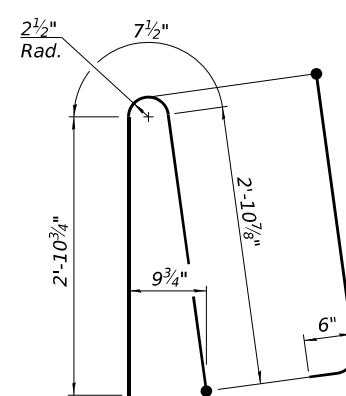
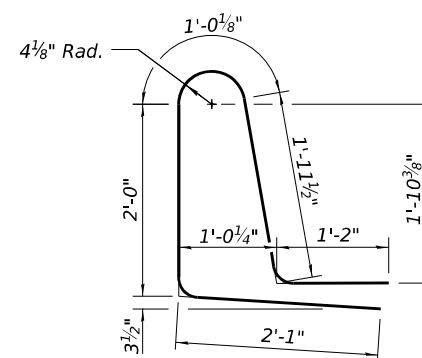
BAR x102(S)




BAR d100(S)




BAR d102(S)



BAR d101(S)



BAR d103(S)

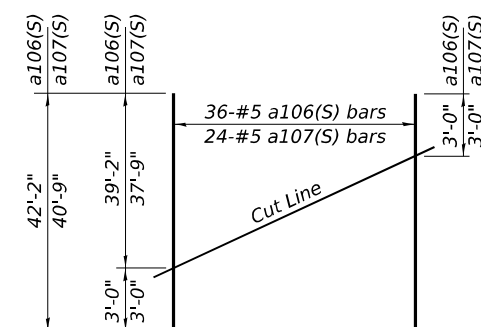


FIELD CUTTING DIAGRAM

Order a106(S) and a107(S) bars full length.
Cut as shown and use remainder of
bars in opposite end of deck.

UNIT 1 EB
SUPERSTRUCTURE
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
a100(S)	1,714	#5	39'-0"	_____
a101(S)	1,148	#5	37'-9"	_____
a102(S)	1,754	#6	8'-4"	┌_____
a103(S)	21	#7	10'-4"	└_____
a104(S)	2	#7	42'-5"	_____
a105(S)	8	#7	43'-9"	_____
a106(S)	36	#5	42'-2"	_____
a107(S)	24	#5	40'-9"	_____
a108(S)	8	#6	39'-8"	_____
a109(S)	7	#6	9'-5"	└_____
a110(S)	2	#6	3'-11"	└_____
a111(S)	8	#6	39'-8"	_____
a112(S)	64	#5	1'-6"	_____
b100(S)	286	#5	36'-0"	_____
b101(S)	297	#5	37'-0"	_____
b102(S)	286	#5	37'-11"	_____
b103(S)	230	#5	39'-3"	_____
b104(S)	300	#5	40'-4"	_____
b105(S)	230	#5	41'-4"	_____
b106(S)	288	#6	35'-10"	_____
d100(S)	1,101	#5	7'-0"	└┐
d101(S)	1,101	#5	8'-3"	└┐
d102(S)	6	#6	5'-3"	└┐
d103(S)	12	#6	8'-11"	└┐└┐
e100(S)	144	#4	17'-10"	_____
e101(S)	48	#4	19'-8"	_____
e102(S)	64	#4	18'-1"	_____
e103(S)	72	#4	19'-6"	_____
e104(S)	40	#4	34'-7"	_____
e105(S)	20	#4	31'-5"	_____
e106(S)	20	#4	37'-8"	_____
x100(S)	63	#5	5'-11"	└┐
x101(S)	69	#5	6'-10"	└┐
x102(S)	78	#5	6'-7"	└┐
Concrete Superstructure			Cu Yd.	846.1
Reinforcement Bars, Stainless Steel			Pound	247,98
Protective Coat			Sq. Yd.	3,294
Bridge Deck Grooving (Longitudinal)			Sq. Yd.	1,975
Diamond Grinding (Bridge Section)			Sq. Yd.	2,783

Note: Bar terminators paid for separately.
See Total Bill of Materials.

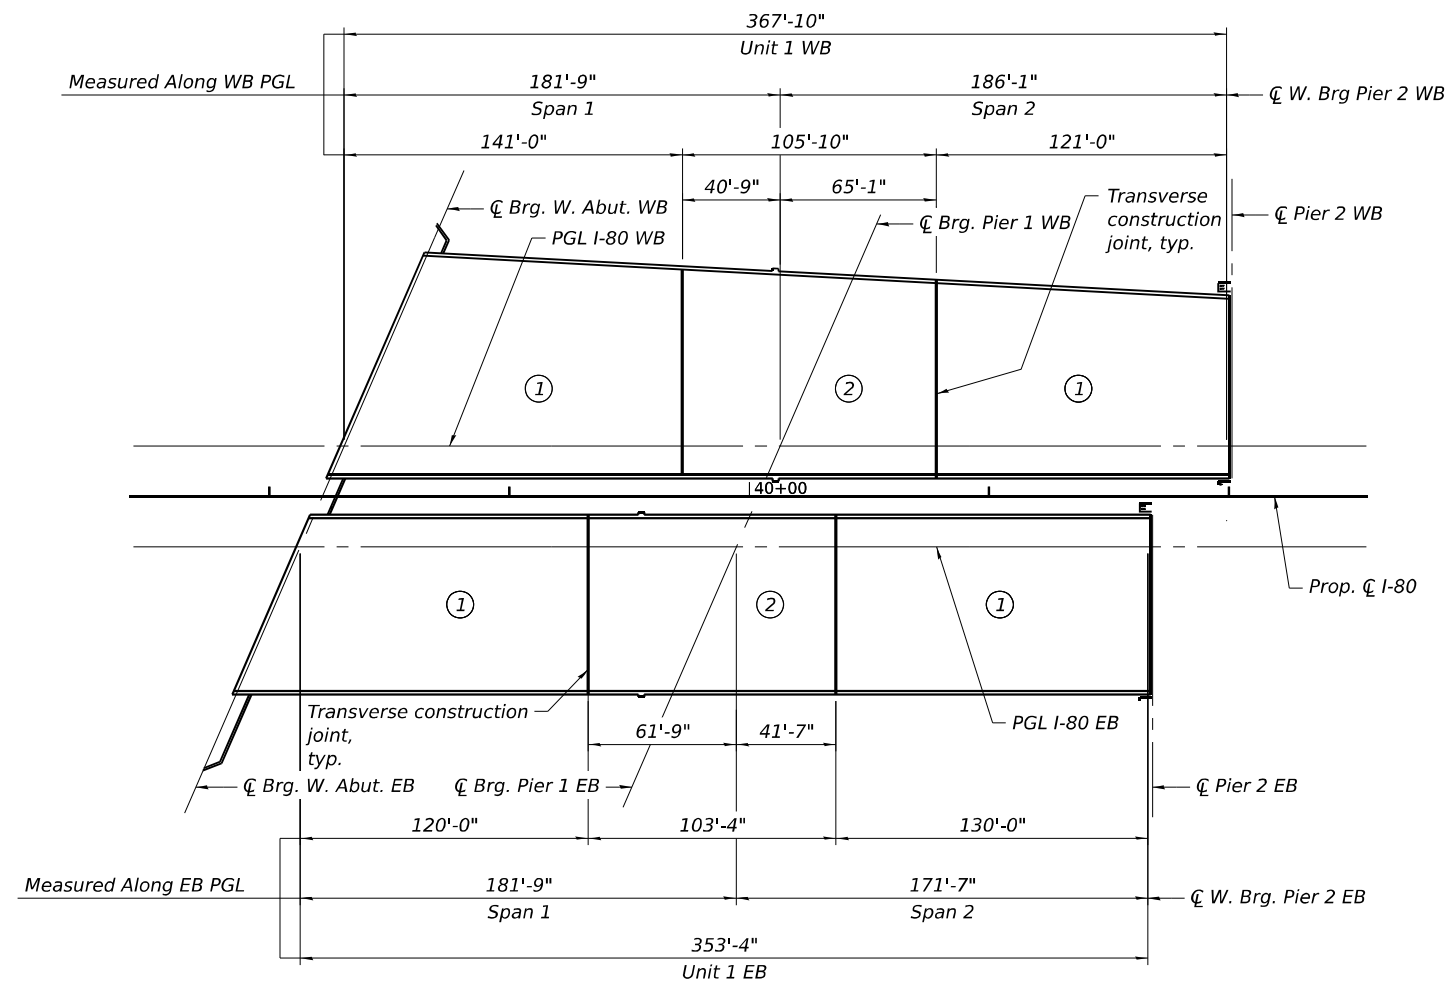

DECK POURING SEQUENCE - UNIT 1

NOTES ON DECK POURING SEQUENCE:

- When the deck pour is stopped for the day at one or more of the transverse bonded construction joints in the deck pouring sequence as shown, the next pour shall not be made until both of the following are met:
 - At least 72 hours shall have elapsed from the end of the previous pour.
 - The concrete strength shall have attained a minimum flexural strength of 675 psi or a minimum compressive strength of 4000 psi.

Model: Default
File Name: p:\projects\transys\corp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structural\0998309-42R23-5309-DCL08.dgn



WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684

USER NAME = USSJ696614	DESIGNED - FM	REVISED -
	CHECKED - PSK	REVISED -
PLOT SCALE = 0:0 3/16" = 1 in.	DRAWN - FM	REVISED -
PLOT DATE = 11/5/2025	CHECKED - PSK	REVISED -


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DECK POURING SEQUENCE - UNIT 1 WB & EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET 5-109 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	690
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

MODEL Default:
FILE NAME: p:\projects\trans\scorp\ppl\hatched\Documents\Projects_2018\CH4001\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structure\0998309-42R23-S310-D201.dgn

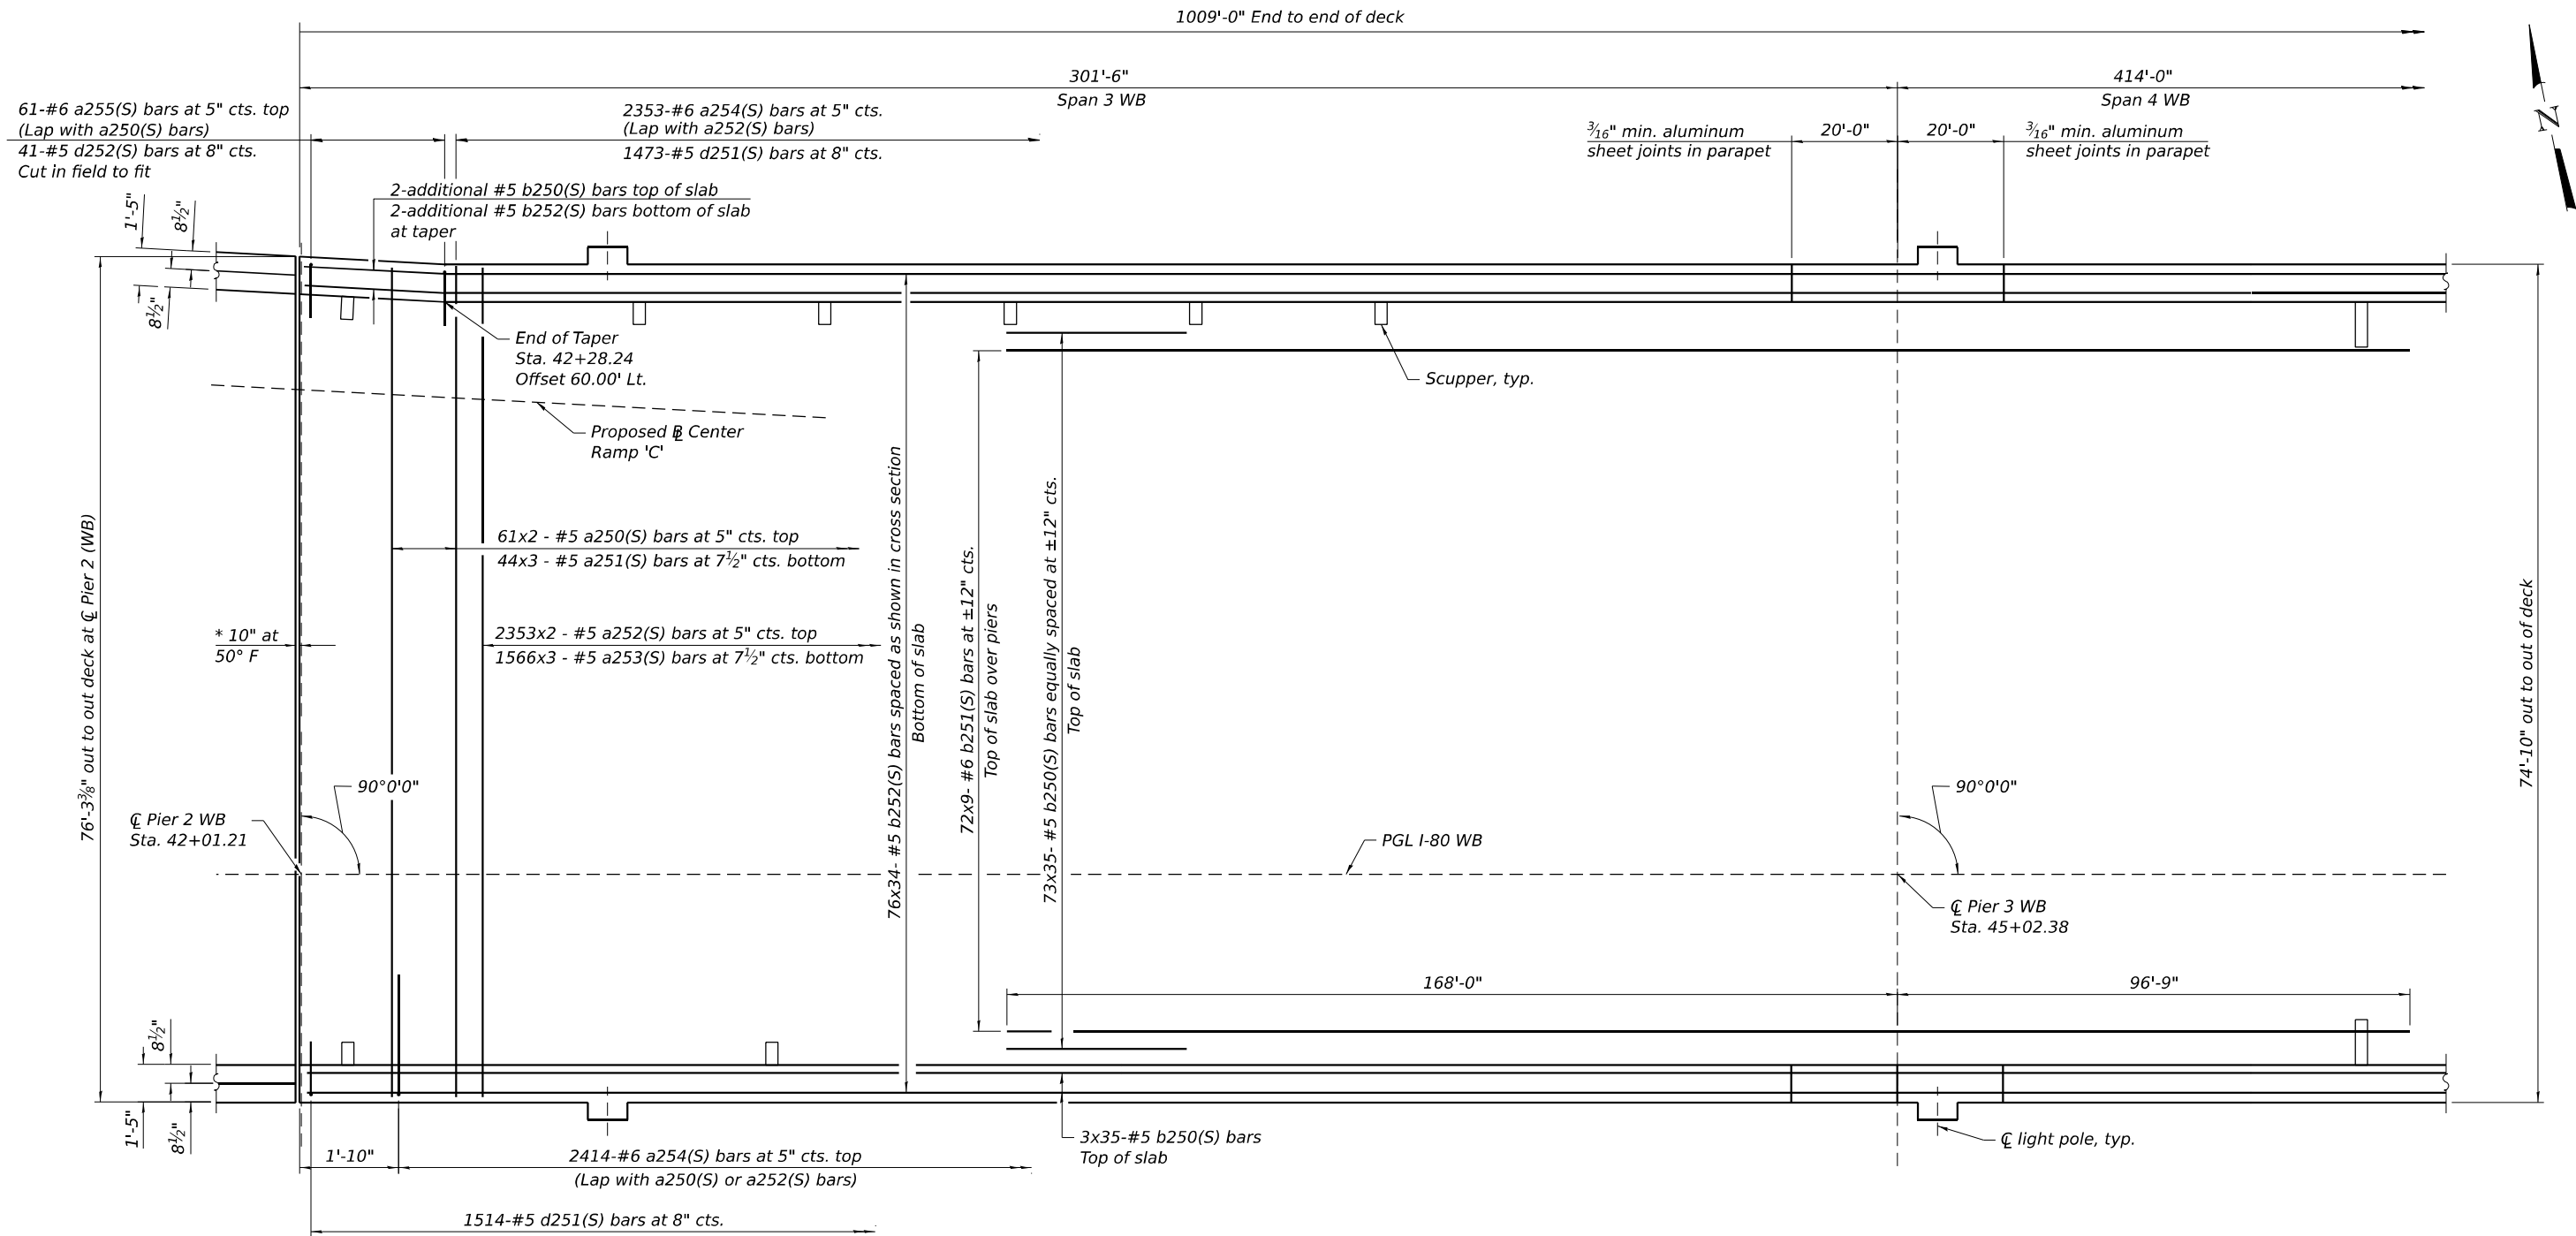

PARTIAL PLAN - UNIT 2 WB

MINIMUM BAR LAP

#5 bar = 3'-6"
#6 bar = 4'-10"


* Dimension showing concrete opening. For joint opening and bars near joint see sheet S-155

NOTES:

- See sheet S-116 for superstructure details and Bill of Material.
- Offsets for scupper and light pole locations are measured off of WB PGL.
- Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
- For Cross Section see sheet S-113.

USER NAME	= USSJ696614	DESIGNED -	PK	REVISED -	
		CHECKED -	LAS	REVISED -	
PLOT SCALE	= 32,000 ' / in.	DRAWN -	BK	REVISED -	
PLOT DATE	= 11/5/2025	CHECKED -	LAS	REVISED -	

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	691
CONTRACT NO. 62R23				
ILLINOIS		FED. AID PROJECT		

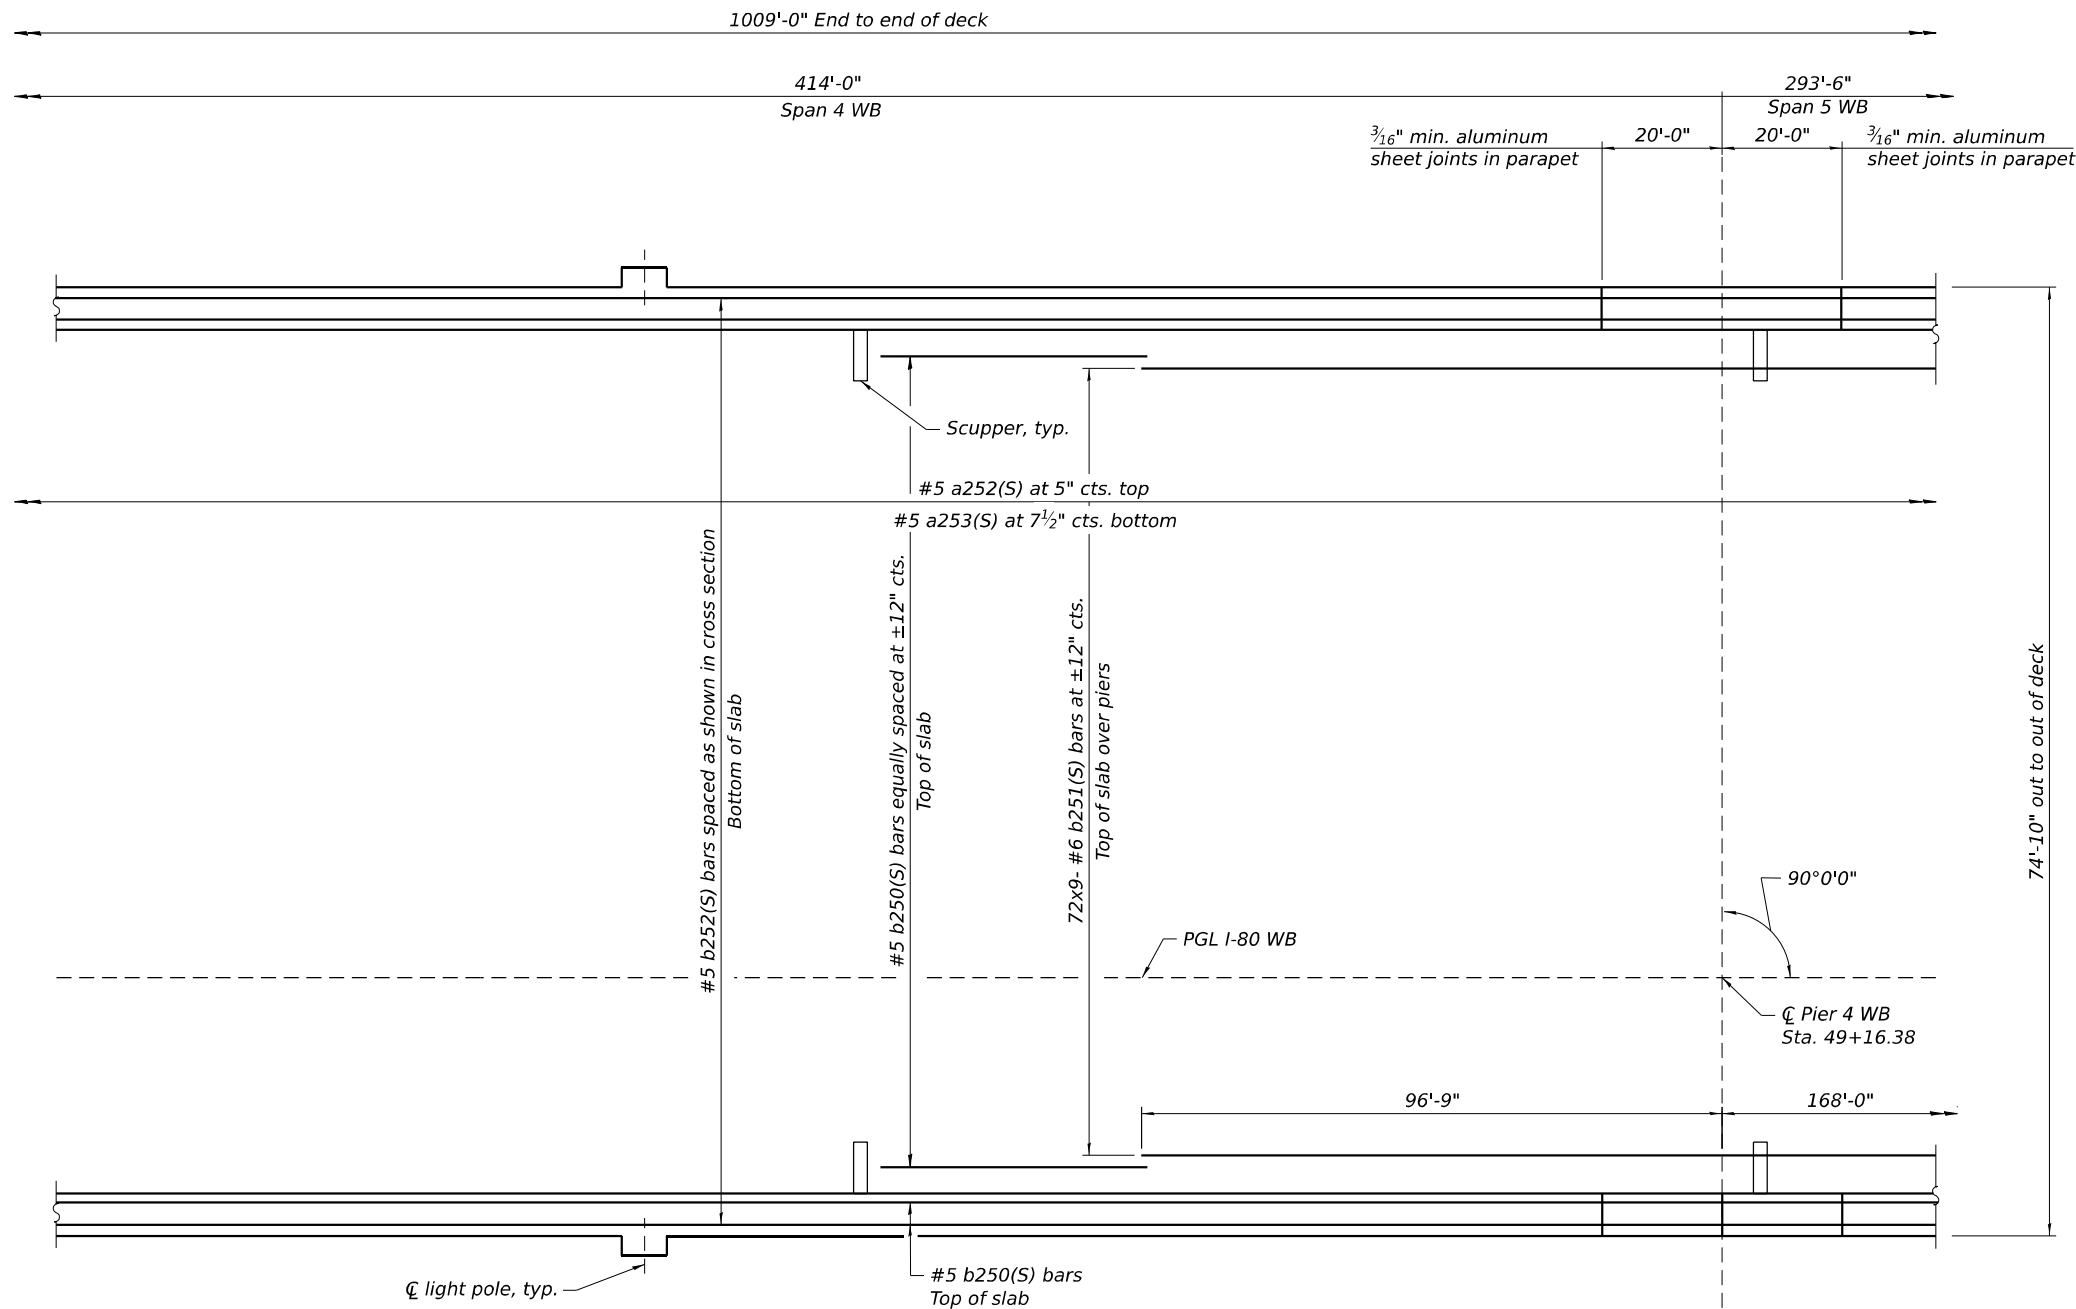

PARTIAL PLAN - UNIT 2 WB

MINIMUM BAR LAP


#5 bar = 3'-6"
#6 bar = 4'-10"

NOTES:

- See sheet S-116 for superstructure details and Bill of Material.
- Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
- For Cross Section see sheet S-113.

MODEL Default: plottransystems-pw.bentley.com/transyscorp-pw-located/Documents/Projects_2018/CH401/401180022/03-WSP/CD/62R23-RB-1-Sheets/Structural/0998309-42R23-S311-D202.dgn
FILE NAME: plottransystems-pw.bentley.com/transyscorp-pw-located/Documents/Projects_2018/CH401/401180022/03-WSP/CD/62R23-RB-1-Sheets/Structural/0998309-42R23-S311-D202.dgn

 WSP USA Inc. 30 N. LA SALLE STREET SUITE 400 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614		DESIGNED - PK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DECK PLAN 2 - UNIT 2 WB		F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CHECKED - LAS		CHECKED - LAS	REVISED -		STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB		I-80	FAI 80 21 STRUCTURE 2	WILL	1230	692
	PLOT SCALE = 32,000 ' / in.		DRAWN - BK	REVISED -		SHEET S-111 OF 5-333 SHEETS		CONTRACT NO. 62R23				
	PLOT DATE = 11/5/2025		CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

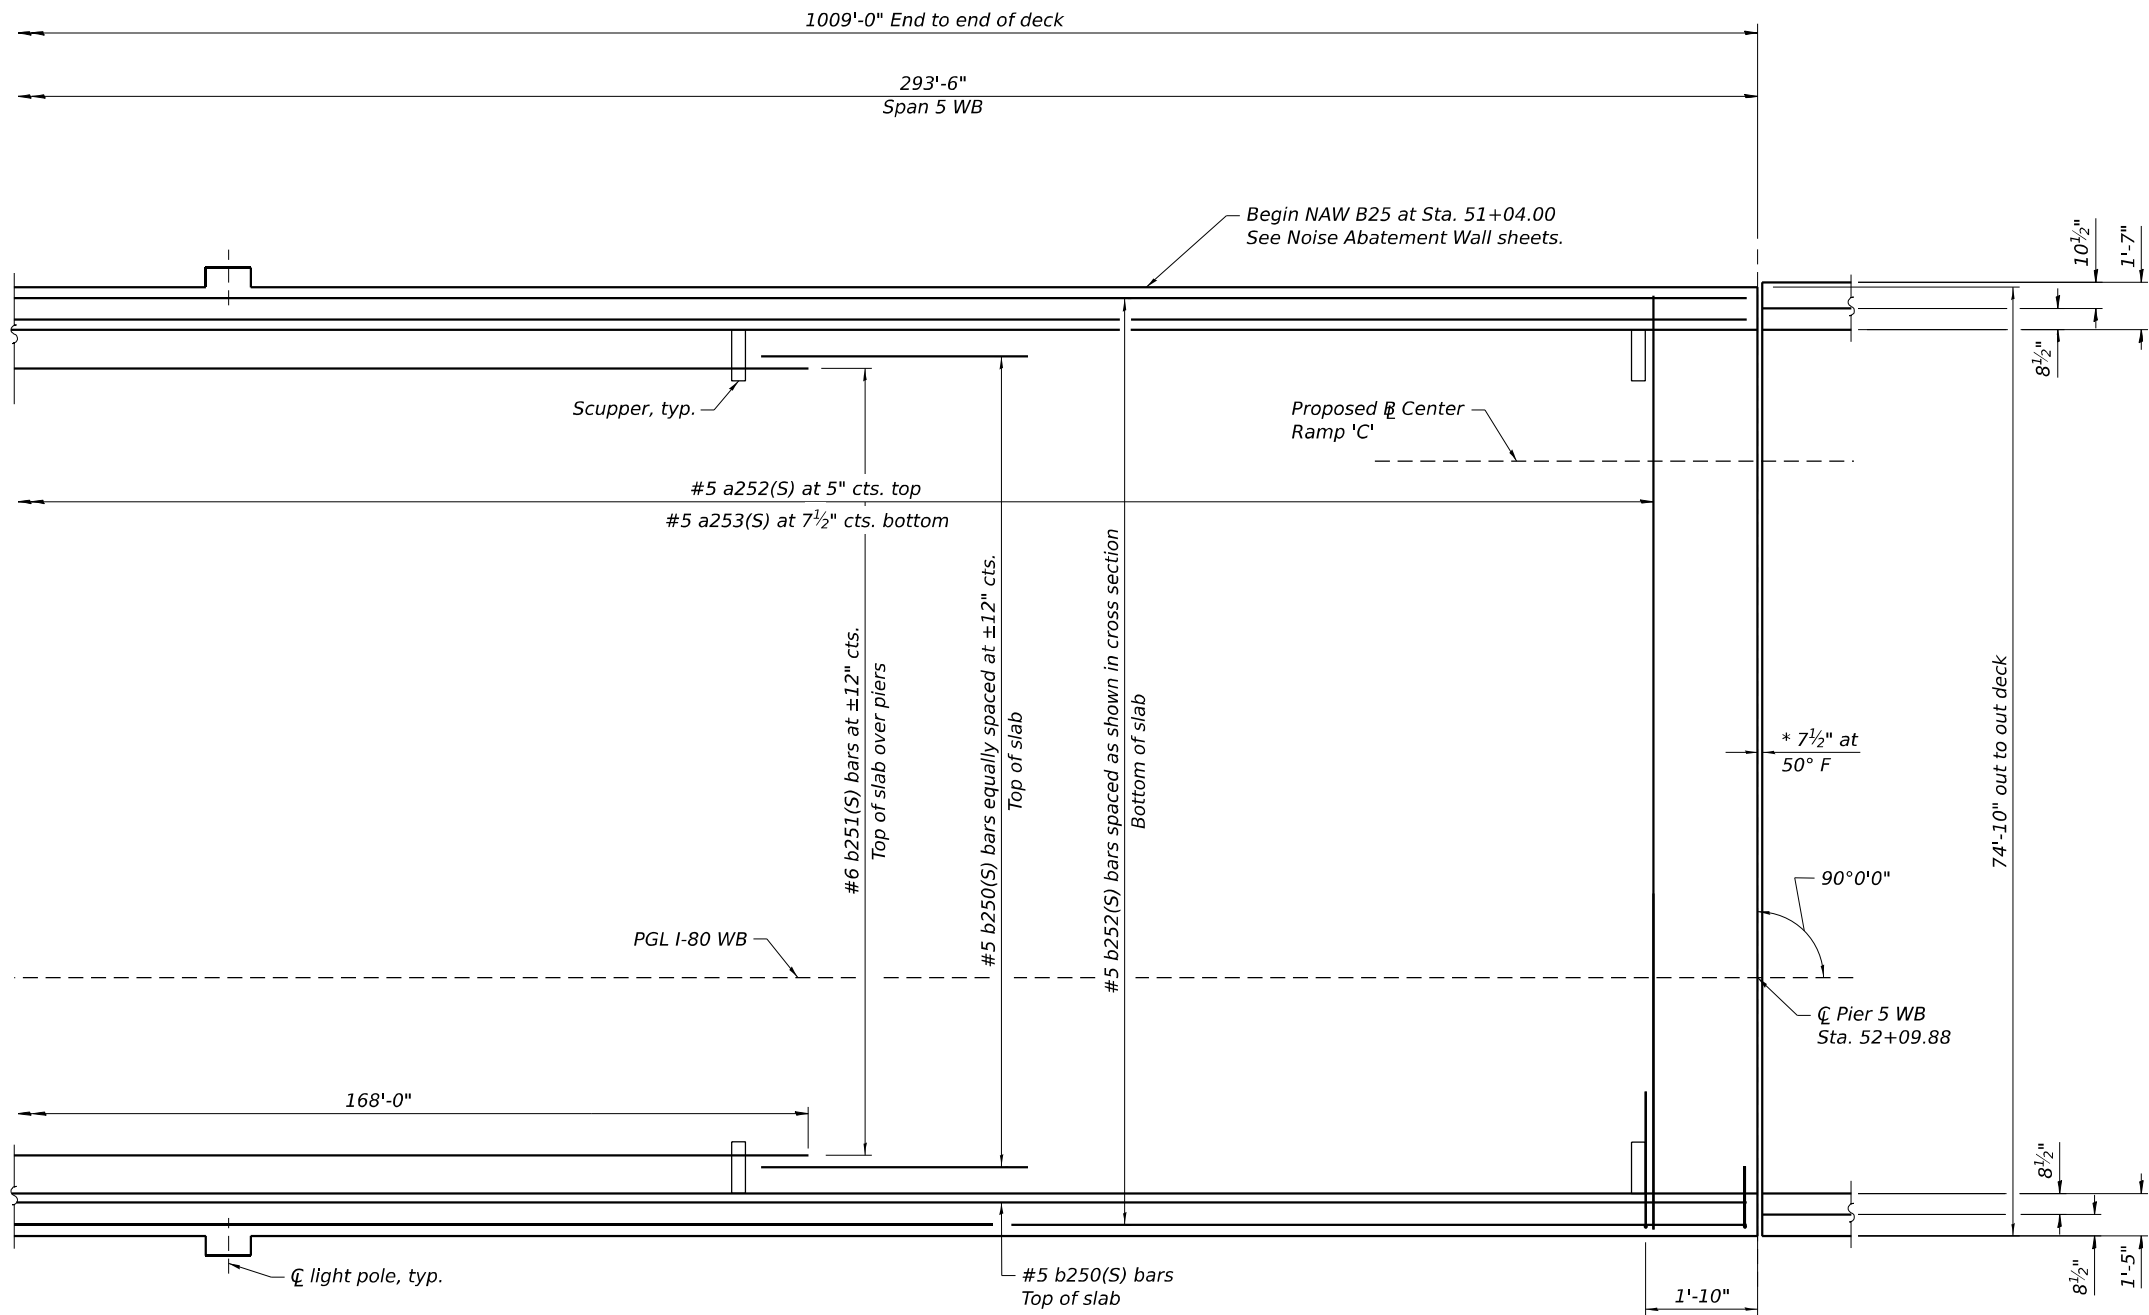

PARTIAL PLAN - UNIT 2 WB

MINIMUM BAR LAP
#5 bar = 3'-6"
#6 bar = 4'-10"

*Dimension showing concrete opening. For joint opening and bars near joint see sheet S-157

- NOTES:
- See sheet S-116 for superstructure details and Bill of Material.
 - Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
 - For Cross Section see sheet S-113.

MODEL Default:
FILE NAME: p:\projtrans\systems-pw\hntb\com\trans\corp\pw\hntb\Documents\Projects_2018\CH401\401180022\03-W59\CAD\62R23-RB-1-Sheets\Structure\0998309-8323-S312-DK203.dgn



WSP USA Inc.

30 N. LA SALLE STREET

SUITE 4000

CHICAGO, IL 60602

TEL: (312) 782-8150

FAX: (312) 782-1684


USER NAME	= USSJ696614	DESIGNED	-	PK	REVISED	-
		CHECKED	-	LAS	REVISED	-
PLOT SCALE	= 32,000 ' / in.	DRAWN	-	BK	REVISED	-
PLOT DATE	= 11/5/2025	CHECKED	-	LAS	REVISED	-




STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DECK PLAN 3 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-112 OF 5-333 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	693
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	

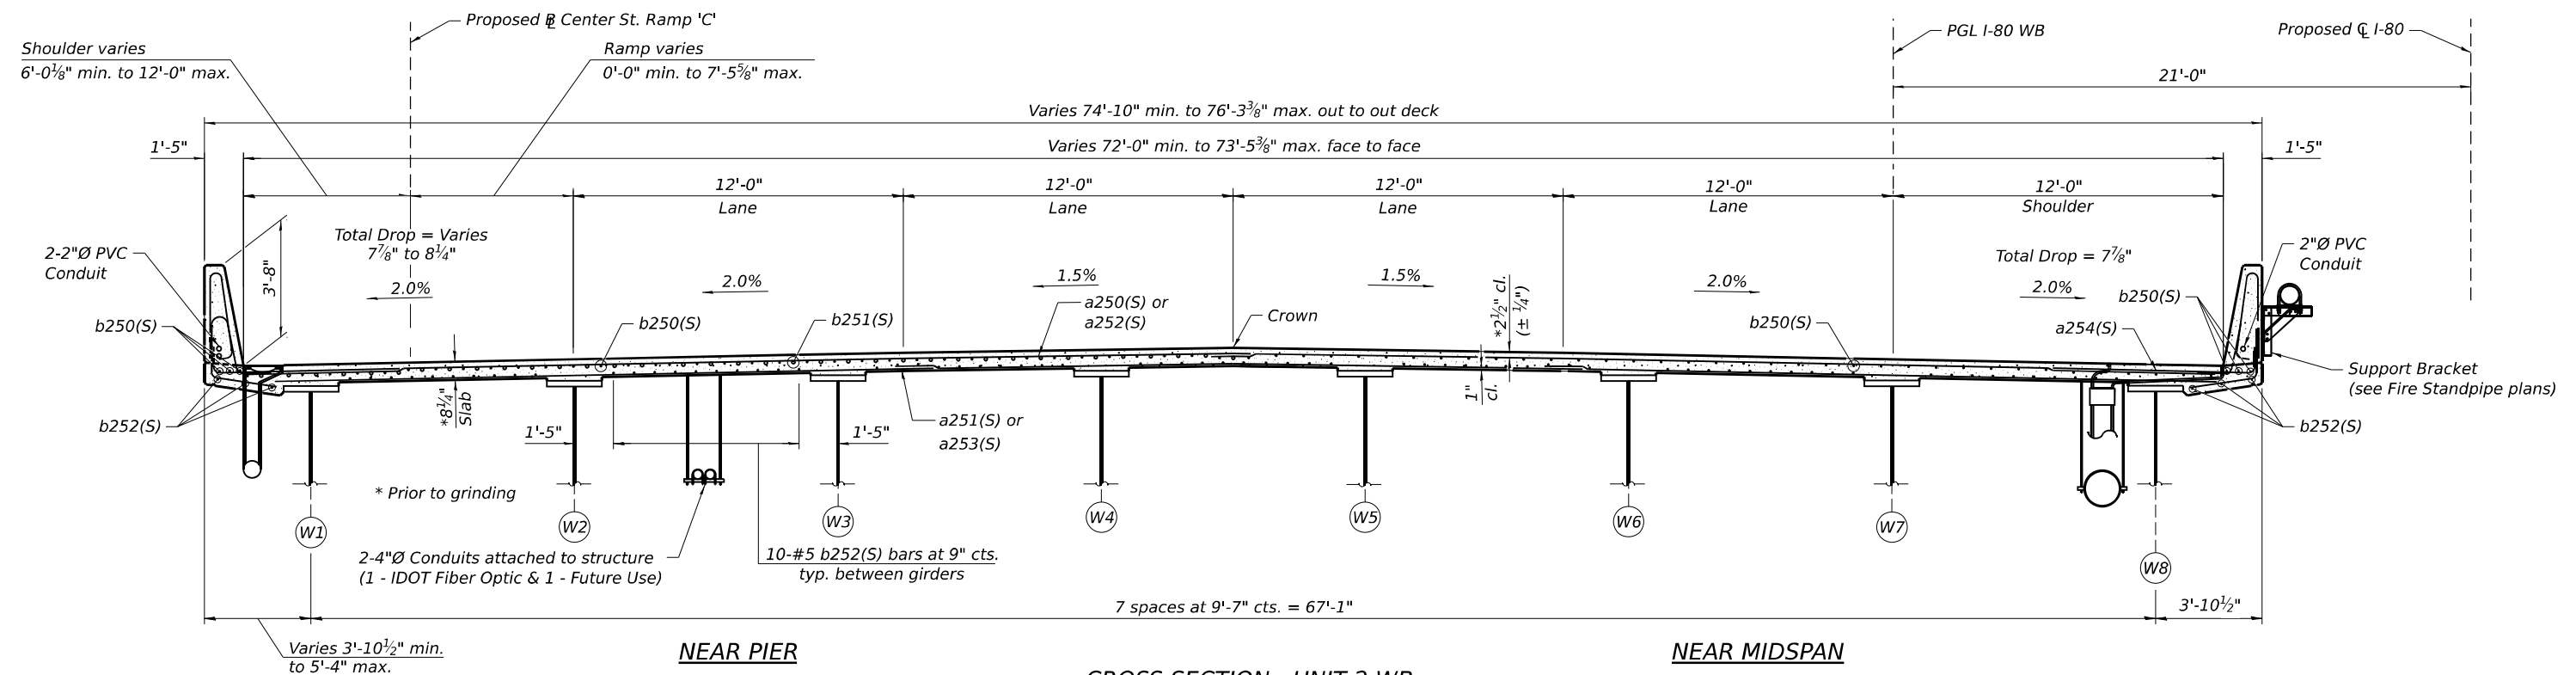

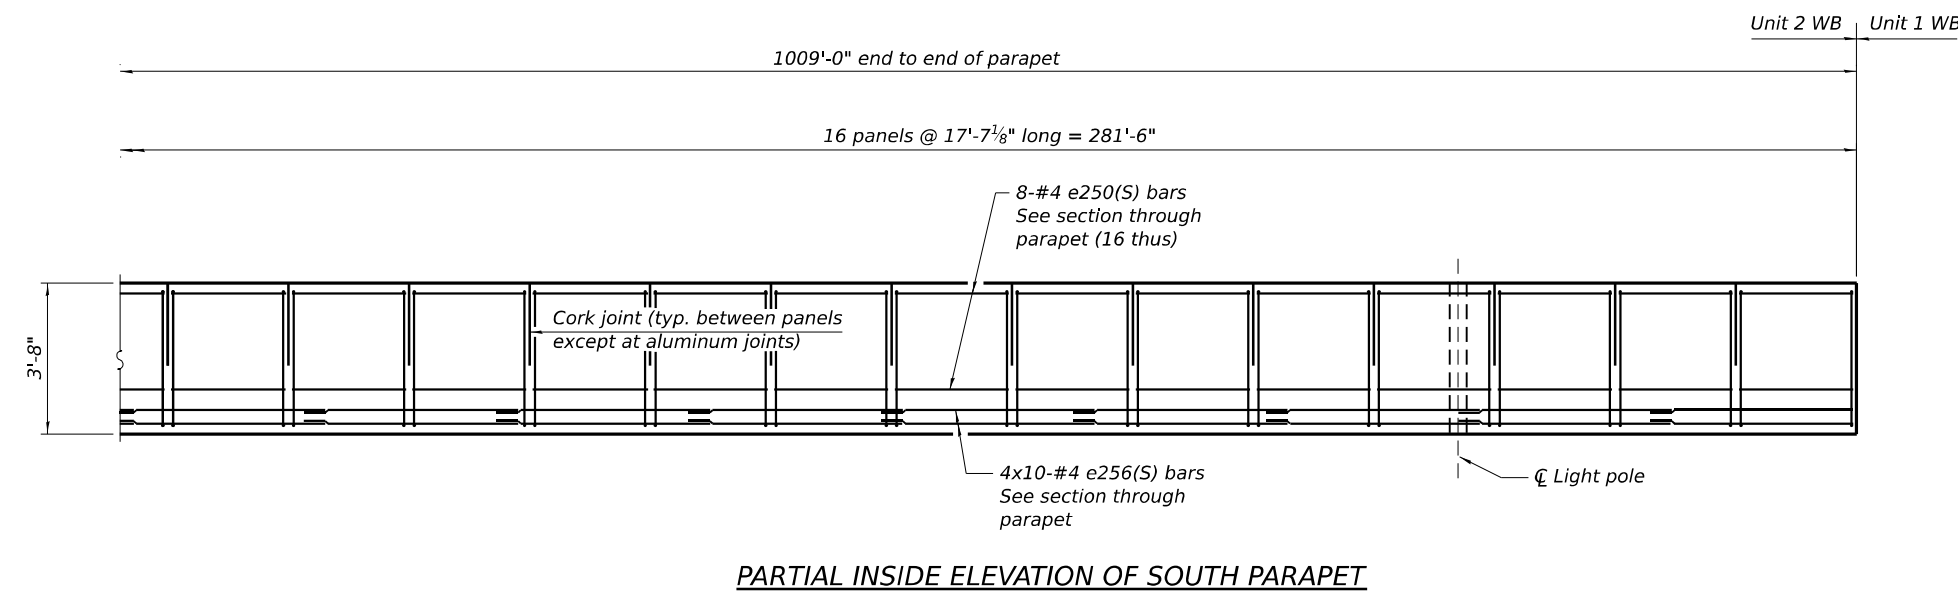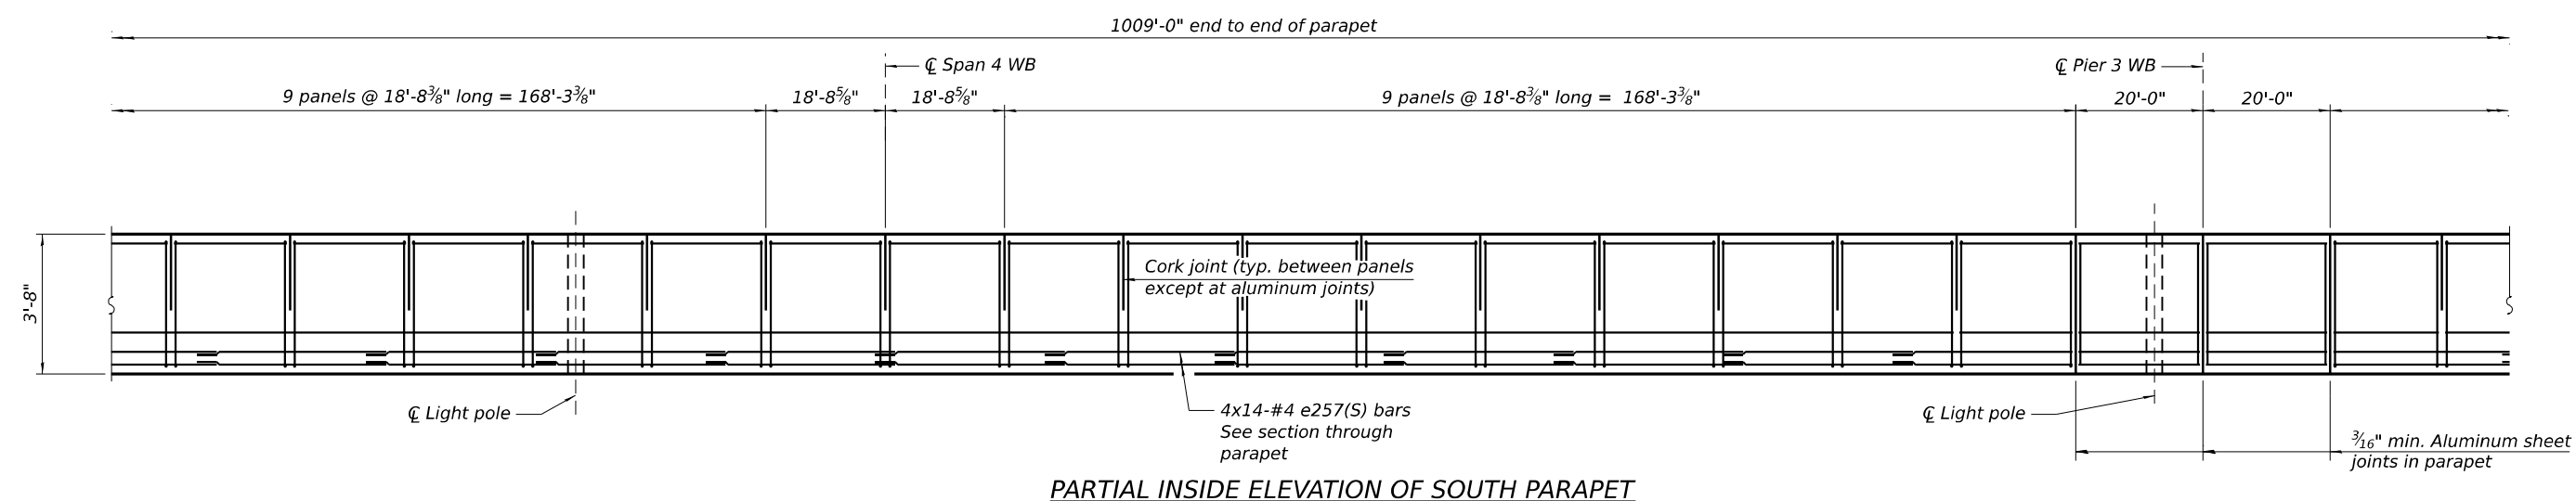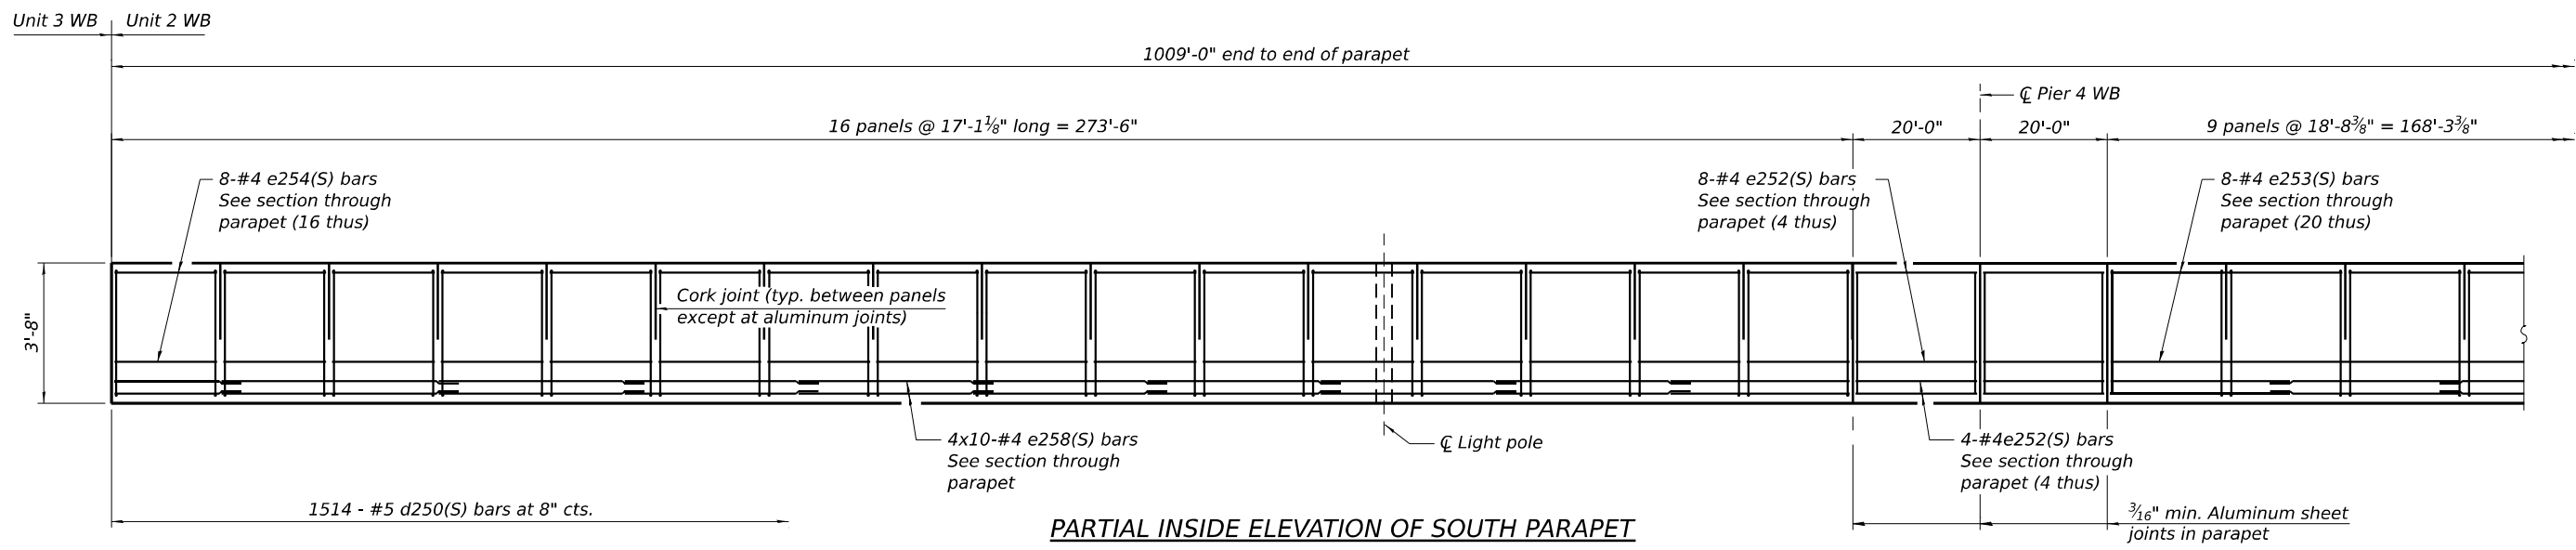

MINIMUM BAR LAP
#4 bar = 2'-5"

MODEL Default: p:\projects\trans\systems-pw\hntb\com\trans\corp\ppl\hntb\Documents\Projects_2018\CH4001401180022\03-WSP\CAD\62R23-RB-1-Struct\Structural\0998309-42R23-5315-D2C06.dgn
FILE NAME: p:\projects\trans\systems-pw\hntb\com\trans\corp\ppl\hntb\Documents\Projects_2018\CH4001401180022\03-WSP\CAD\62R23-RB-1-Struct\Structural\0998309-42R23-5315-D2C06.dgn

WSP USA Inc.
30 N. LA SALLE STREET
SUITE 4000
CHICAGO, IL 60602
TEL: (312) 782-8150
FAX: (312) 782-1684


USER NAME = USSJ696614	DESIGNED - PK	REVISED -
	CHECKED - LAS	REVISED -
PLOT SCALE = 28,000 ' / in.	DRAWN - BK	REVISED -
PLOT DATE = 11/5/2025	CHECKED - LAS	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PARAPET ELEVATION 2 - UNIT 2 WB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-115 OF S-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	696
CONTRACT NO. 62R23				
ILLINOIS FED. AID PROJECT				

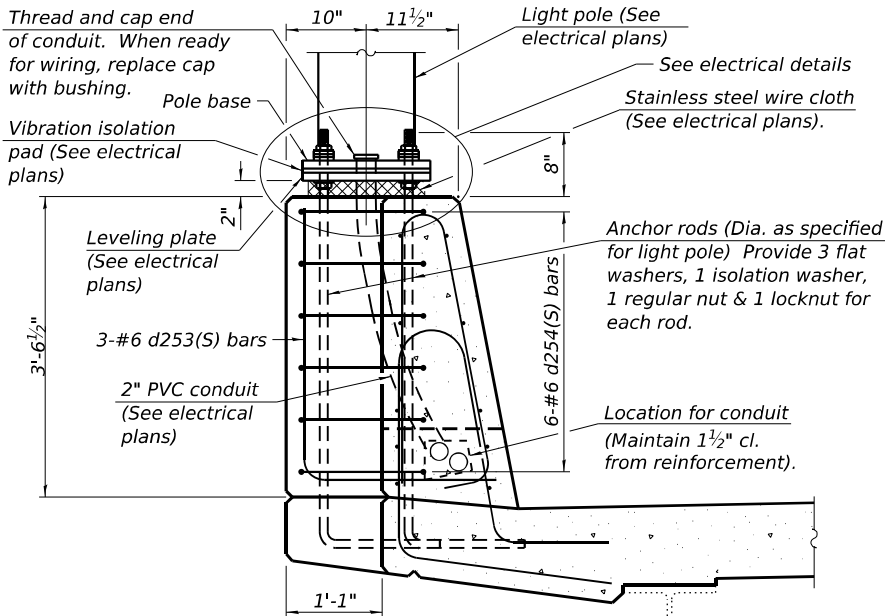


SECTION A-A

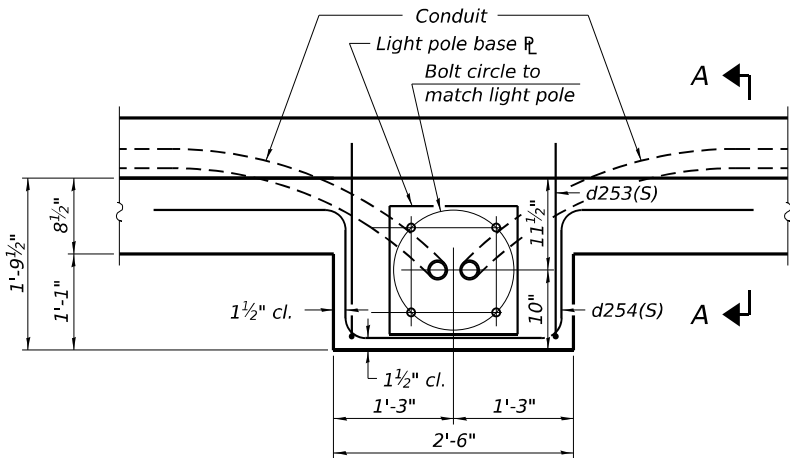

PLAN


Note:
Cost of anchor rods is included
with Concrete Superstructure.

LIGHT POLE DETAILS

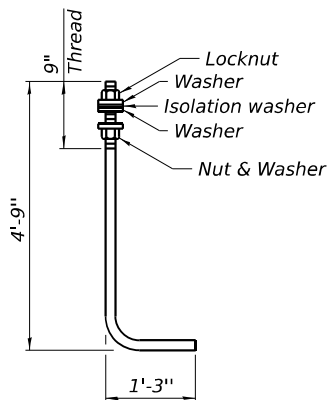


ANCHOR ROD


Diameter as specified for light poles.
(ASTM F 1554 Grade 105) Full length
hot dipped galvanized.

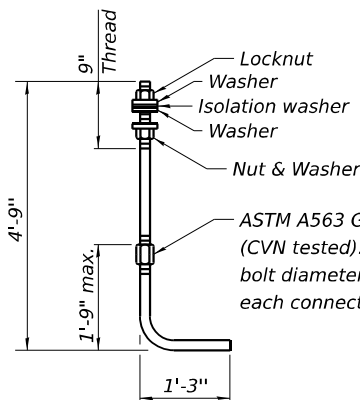

**ALTERNATE
ANCHOR ROD**

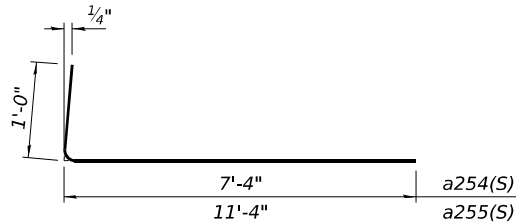


BAR a254(S), a255(S)




HEADED BAR a258(S)

(Headed. 28-#6 Bar terminators)




HEADED BAR a259(S), a260(S)


(Headed. 6-#6 a259(S) Bar terminators
2-#6 a260(S) Bar terminators)

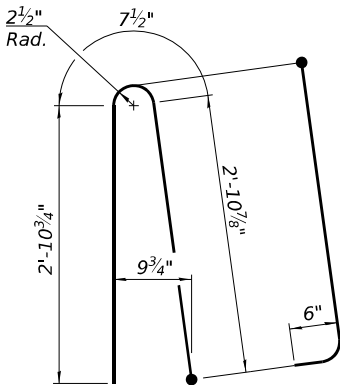


BAR d250(S)

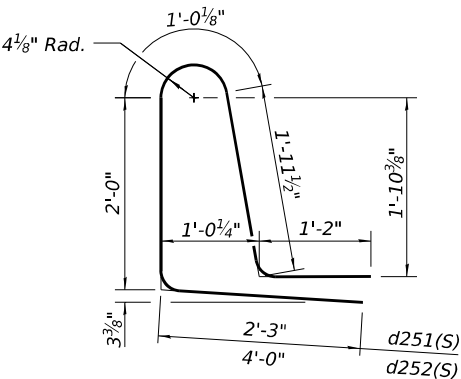


BAR d251(S), d252(S)




BAR d253(S)




BAR d254(S)



BAR e251(S), e255(S)

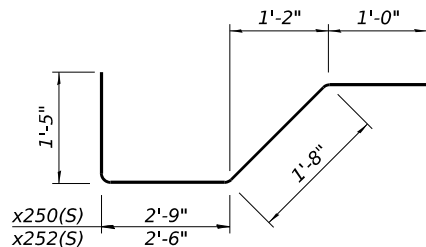

BAR x250(S) or x252(S)




BAR x251(S), x253(S)

**UNIT 2 WB
SUPERSTRUCTURE
BILL OF MATERIAL**

Bar	No.	Size	Length	Shape
a250(S)	122	#5	39'-9"	
a251(S)	132	#6	26'-10"	
a252(S)	4,706	#5	39'-0"	
a253(S)	4,698	#5	26'-4"	
a254(S)	4,767	#6	8'-4"	
a255(S)	61	#6	12'-4"	
a256(S)	24	#6	28'-7"	
a257(S)	24	#6	28'-1"	
a258(S)	14	#6	9'-4"	
a259(S)	3	#6	3'-6"	
a260(S)	1	#6	5'-0"	
a261(S)	152	#5	1'-6"	
b250(S)	2,767	#5	32'-3"	
b251(S)	1,296	#6	33'-9"	
b252(S)	2,586	#5	33'-1"	
d250(S)	3,028	#5	7'-0"	
d251(S)	2,987	#5	8'-5"	
d252(S)	41	#5	10'-2"	
d253(S)	24	#6	5'-3"	
d254(S)	48	#6	8'-11"	
e250(S)	248	#4	17'-3"	
e251(S)	8	#4	17'-3"	
e252(S)	96	#4	19'-8"	
e253(S)	320	#4	18'-4"	
e254(S)	256	#4	16'-9"	
e255(S)	4	#4	30'-4"	
e256(S)	76	#4	30'-4"	
e257(S)	112	#4	29'-0"	
e258(S)	80	#4	29'-6"	
x250(S)	69	#5	6'-10"	
x251(S)	78	#5	6'-7"	
x252(S)	69	#5	6'-7"	
x253(S)	78	#5	6'-4"	
Concrete Superstructure			Cu Yd.	2,364.1
Reinforcement Bars, Stainless Steel			Pound	708,490
Protective Coat			Sq. Yd.	9,070
Bridge Deck Grooving (Longitudinal)			Sq. Yd.	5,446
Diamond Grinding (Bridge Section)			Sq. Yd.	7,633

Note: Bar terminators paid for separately.
See Total Bill of Materials.

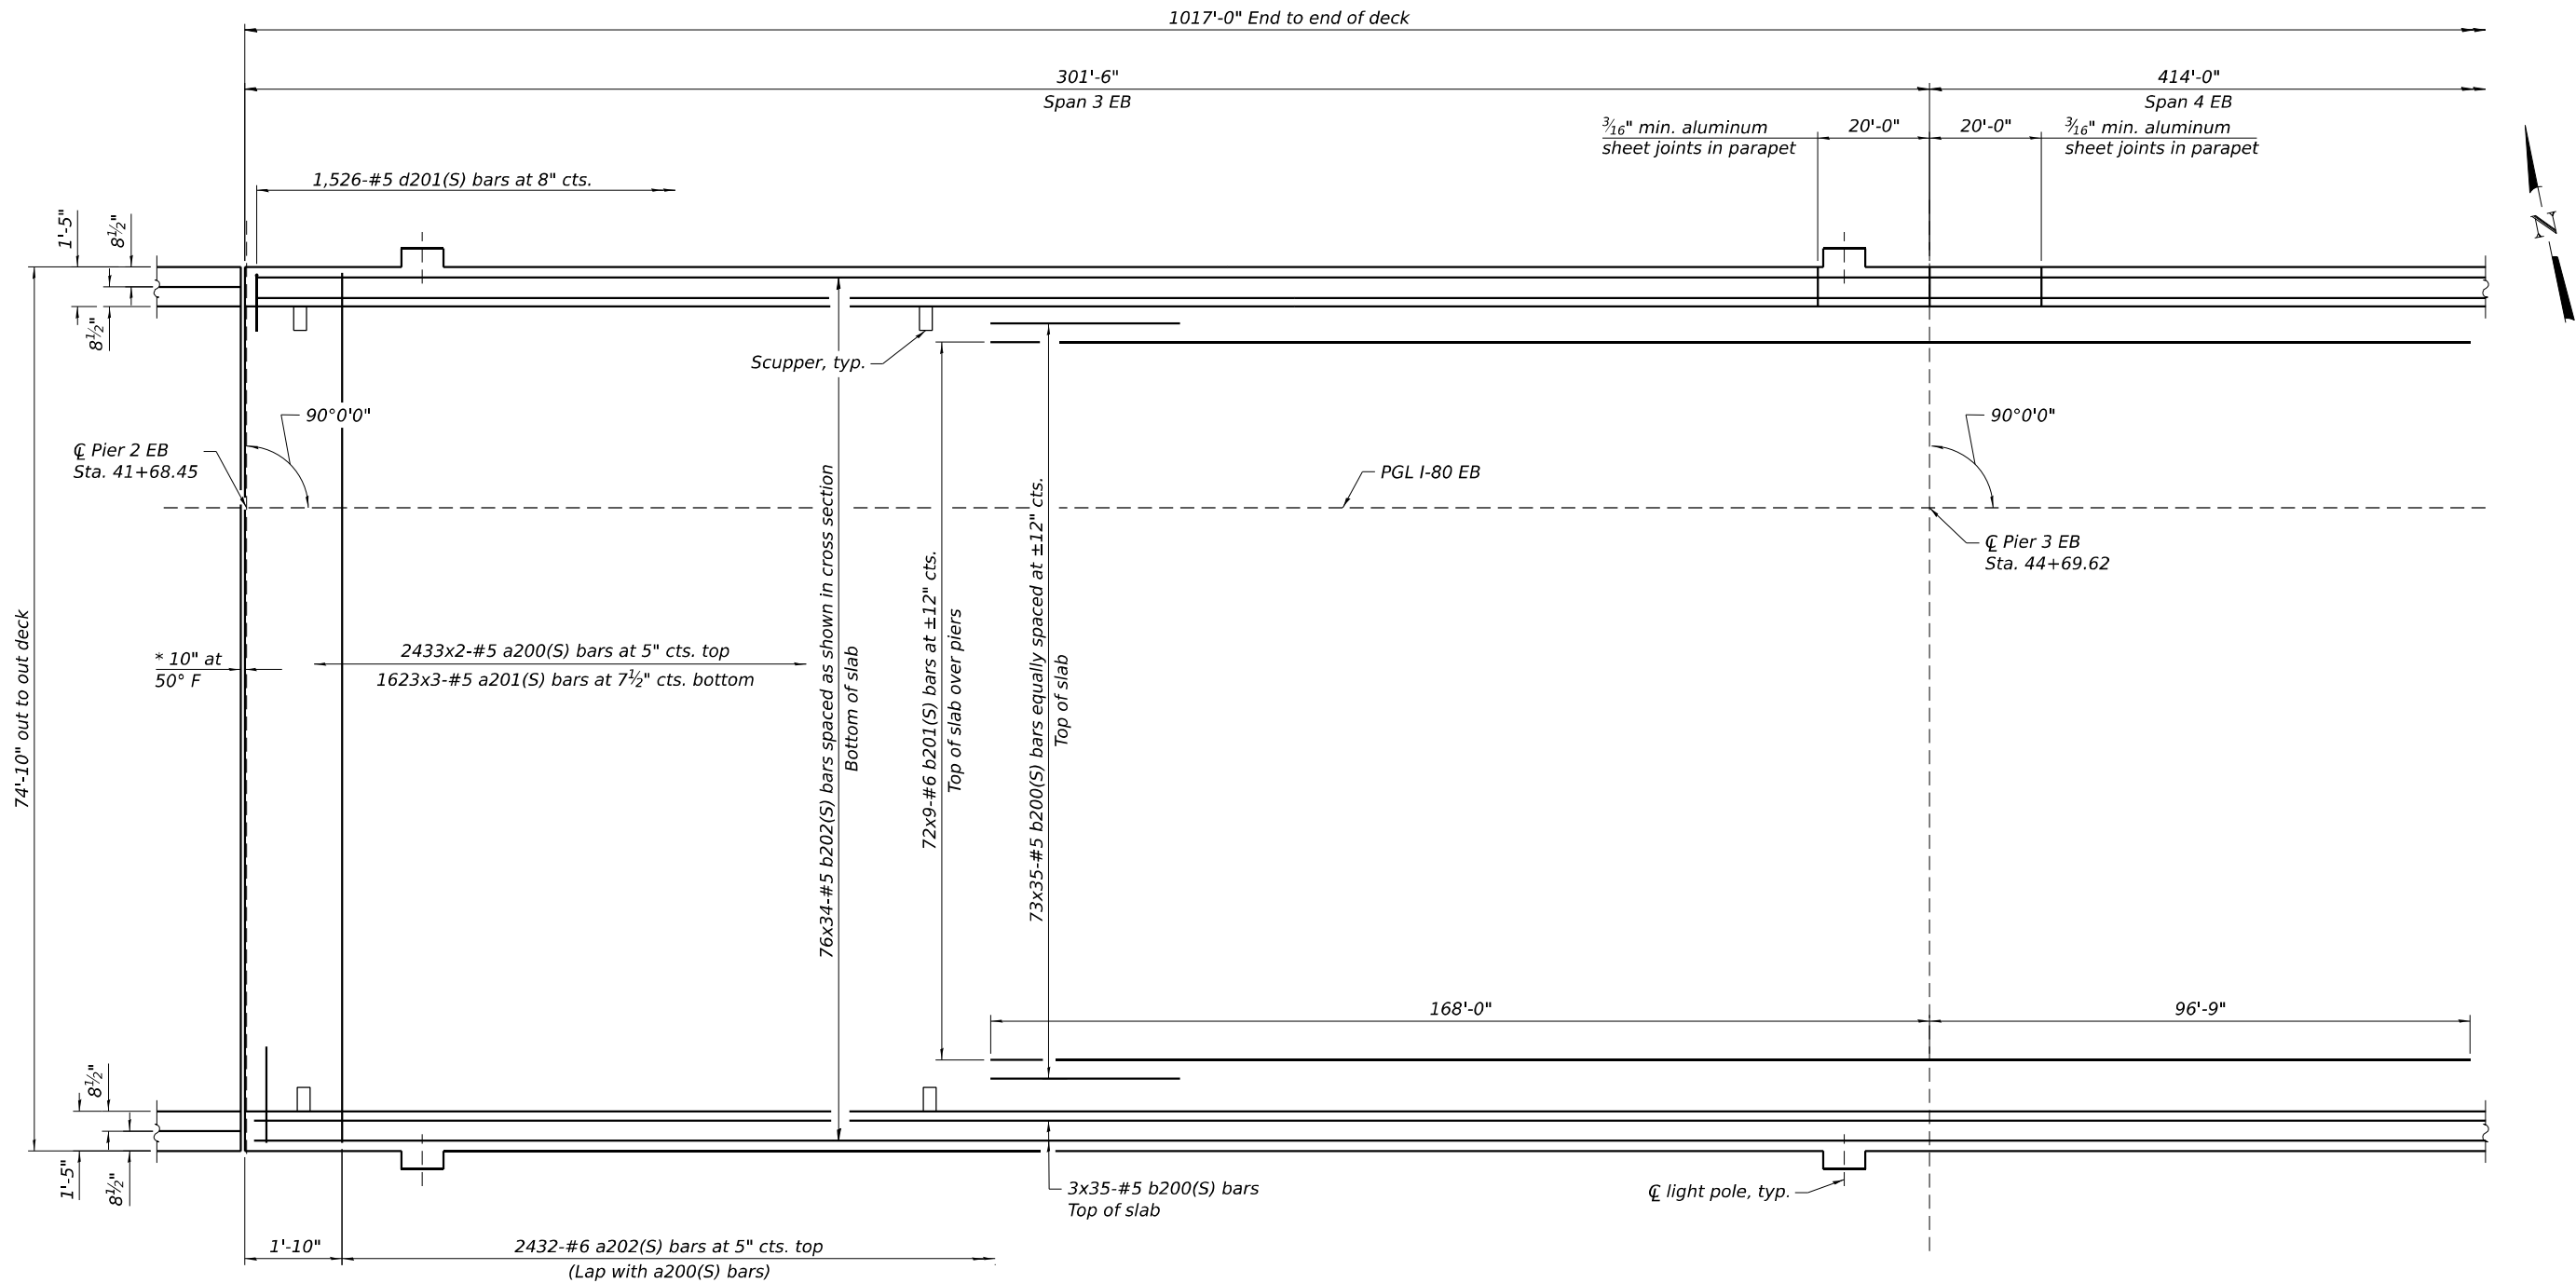

PLAN - UNIT 2 EB

* Dimension showing concrete opening. For joint opening and bars near joint see sheet S-156

MINIMUM BAR LAP
#5 bar = 3'-6"
#6 bar = 4'-10"

- NOTES:
- See sheet S-123 for superstructure details and Bill of Material.
 - Offsets for scupper and light pole locations are measured off of EB PGL.
 - Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
 - For Cross Section see sheet S-120.

MODEL Default: p:\projects\trans\scorp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structure\0998309-42R23-5317-20208.dgn
FILE NAME: p:\projects\trans\scorp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structure\0998309-42R23-5317-20208.dgn



WSP USA Inc.

30 N. LA SALLE STREET

SUITE 4000

CHICAGO, IL 60602

TEL: (312) 782-8150

FAX: (312) 782-1684


USER NAME	= USSJ696614	DESIGNED -	PK	REVISED -	
		CHECKED -	LAS	REVISED -	
PLOT SCALE	= 32,000 ' / in.	DRAWN -	BK	REVISED -	
PLOT DATE	= 11/5/2025	CHECKED -	LAS	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DECK PLAN 1 - UNIT 2 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-117 OF S-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	698
CONTRACT NO. 62R23				
ILLINOIS		FED. AID PROJECT		

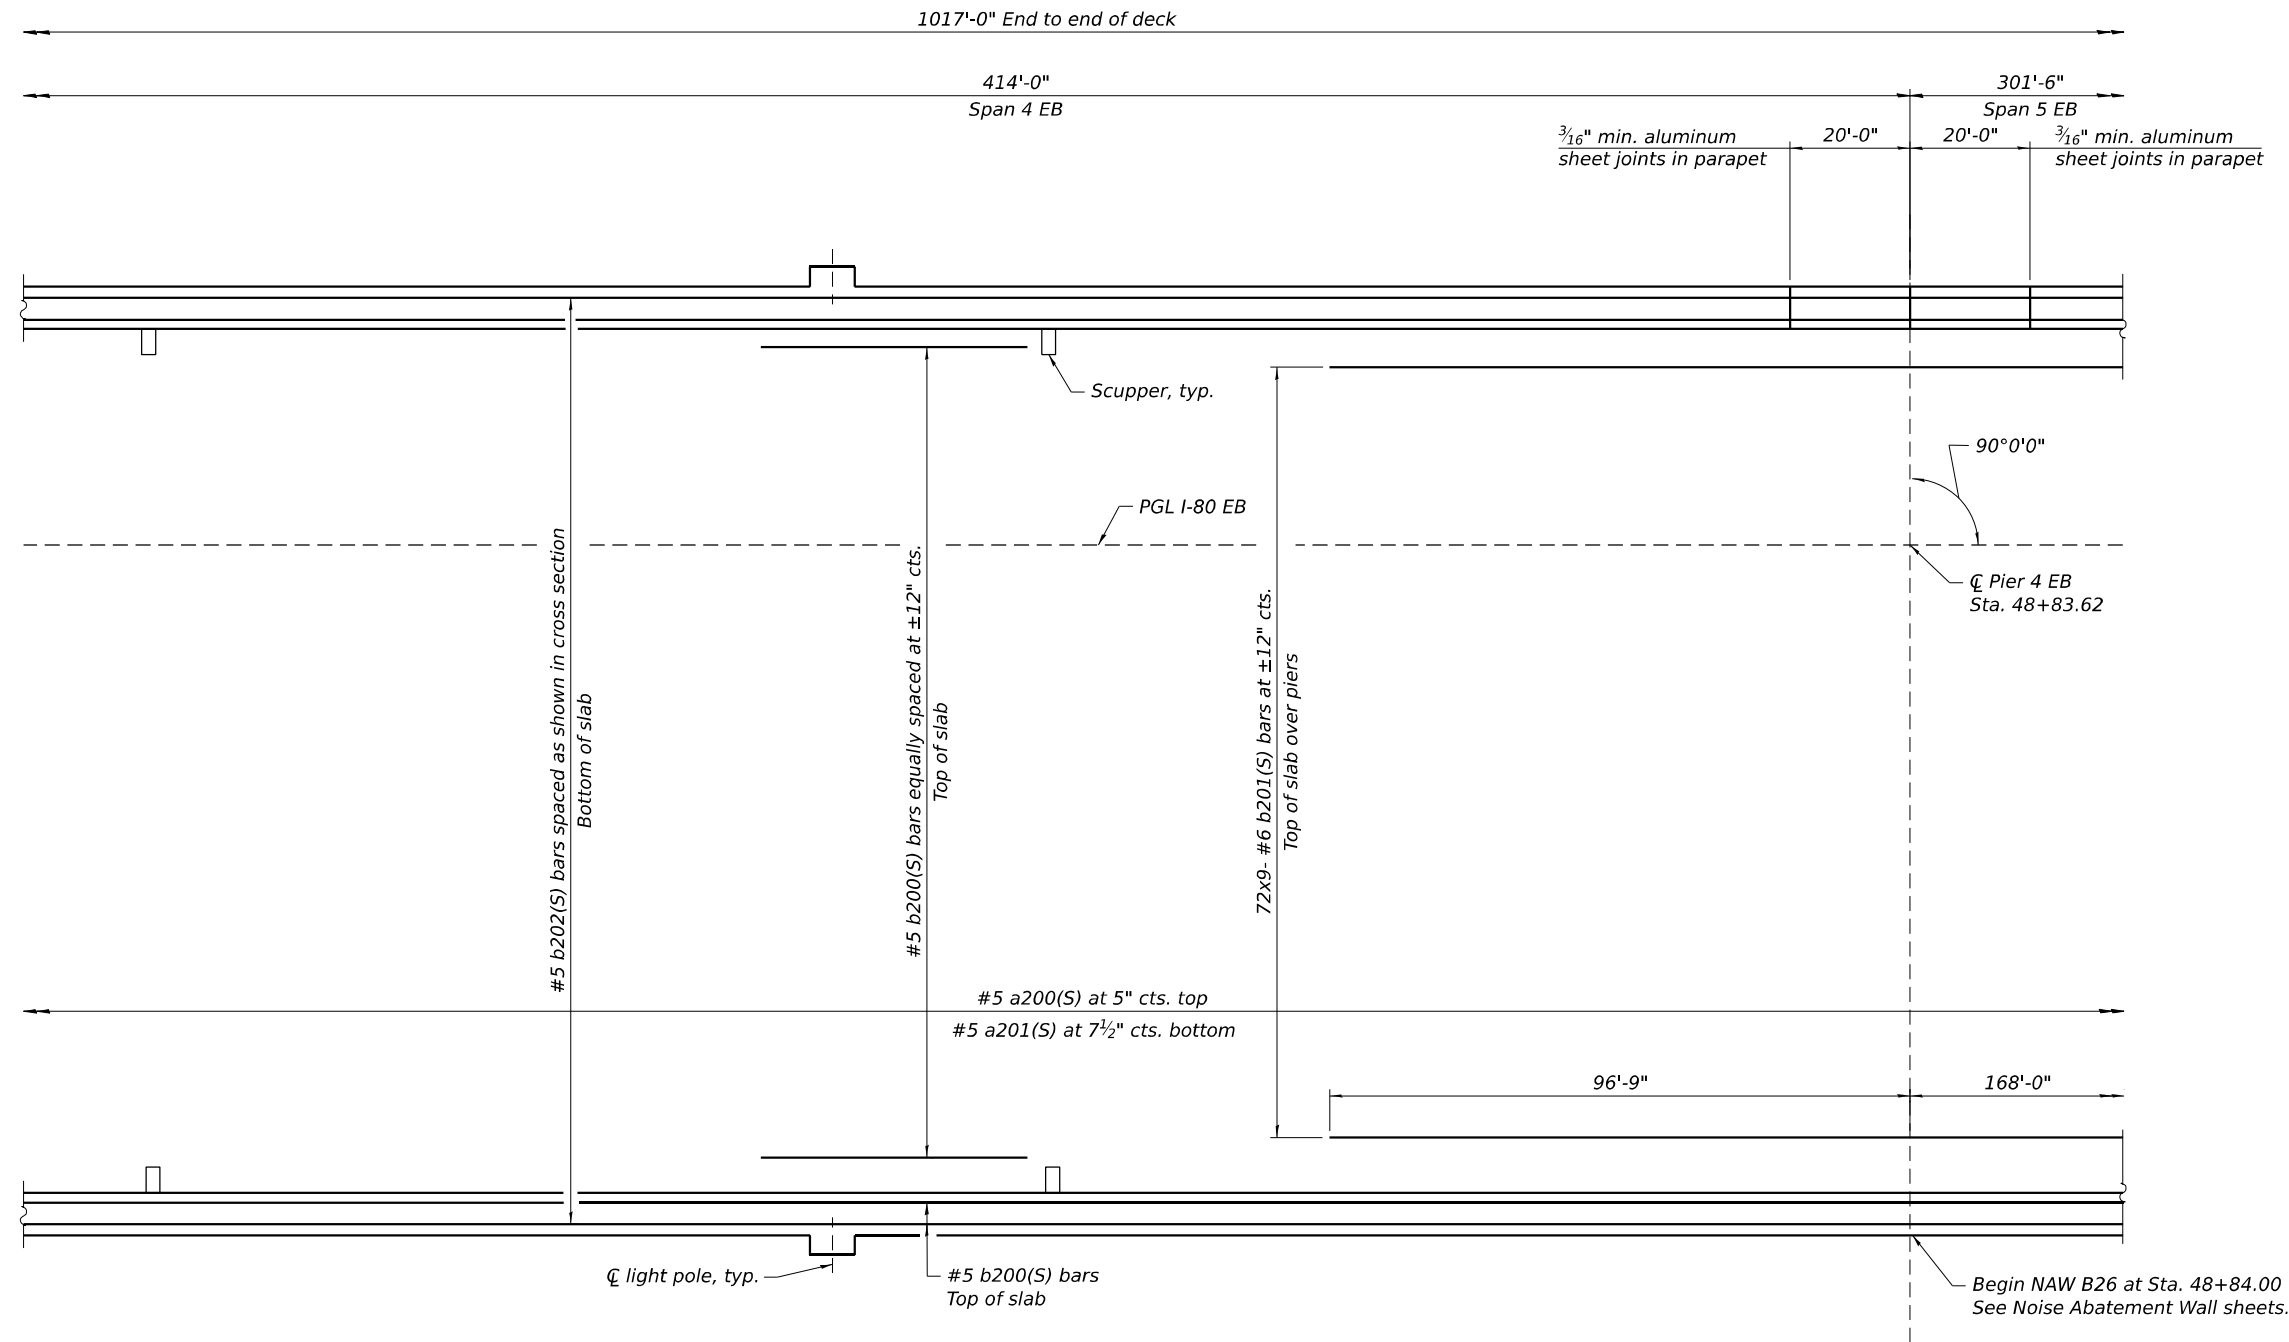

PLAN - UNIT 2 EB

MINIMUM BAR LAP


#5 bar = 3'-6"
#6 bar = 4'-10"

NOTES:

- See sheet S-123 for superstructure details and Bill of Material.
- Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
- For Cross Section see sheet S-120.

Model: Default
File Name: p:\projects\trans\trans\corp\ppl\hatched\Documents\Projects_2018\CH401\401180022\03-WSP\CD\62R23-RB-1-Sheets\Structure\0998309-42R23-S318-DC209.dgn

 WSP USA Inc. 30 N. LA SALLE STREET SUITE 400 CHICAGO, IL 60602 TEL: (312) 782-8150 FAX: (312) 782-1684	USER NAME = USSJ696614		DESIGNED - PK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DECK PLAN 2 - UNIT 2 EB		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CHECKED - LAS		CHECKED - LAS	REVISED -		STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB		I-80	FAI 80 21 STRUCTURE 2	WILL	1230	699
	PLOT SCALE = 32,000 ' / in.		DRAWN - BK	REVISED -		SHEET S-118 OF 5-333 SHEETS		CONTRACT NO. 62R23				
	PLOT DATE = 11/5/2025		CHECKED - LAS	REVISED -				ILLINOIS FED. AID PROJECT				

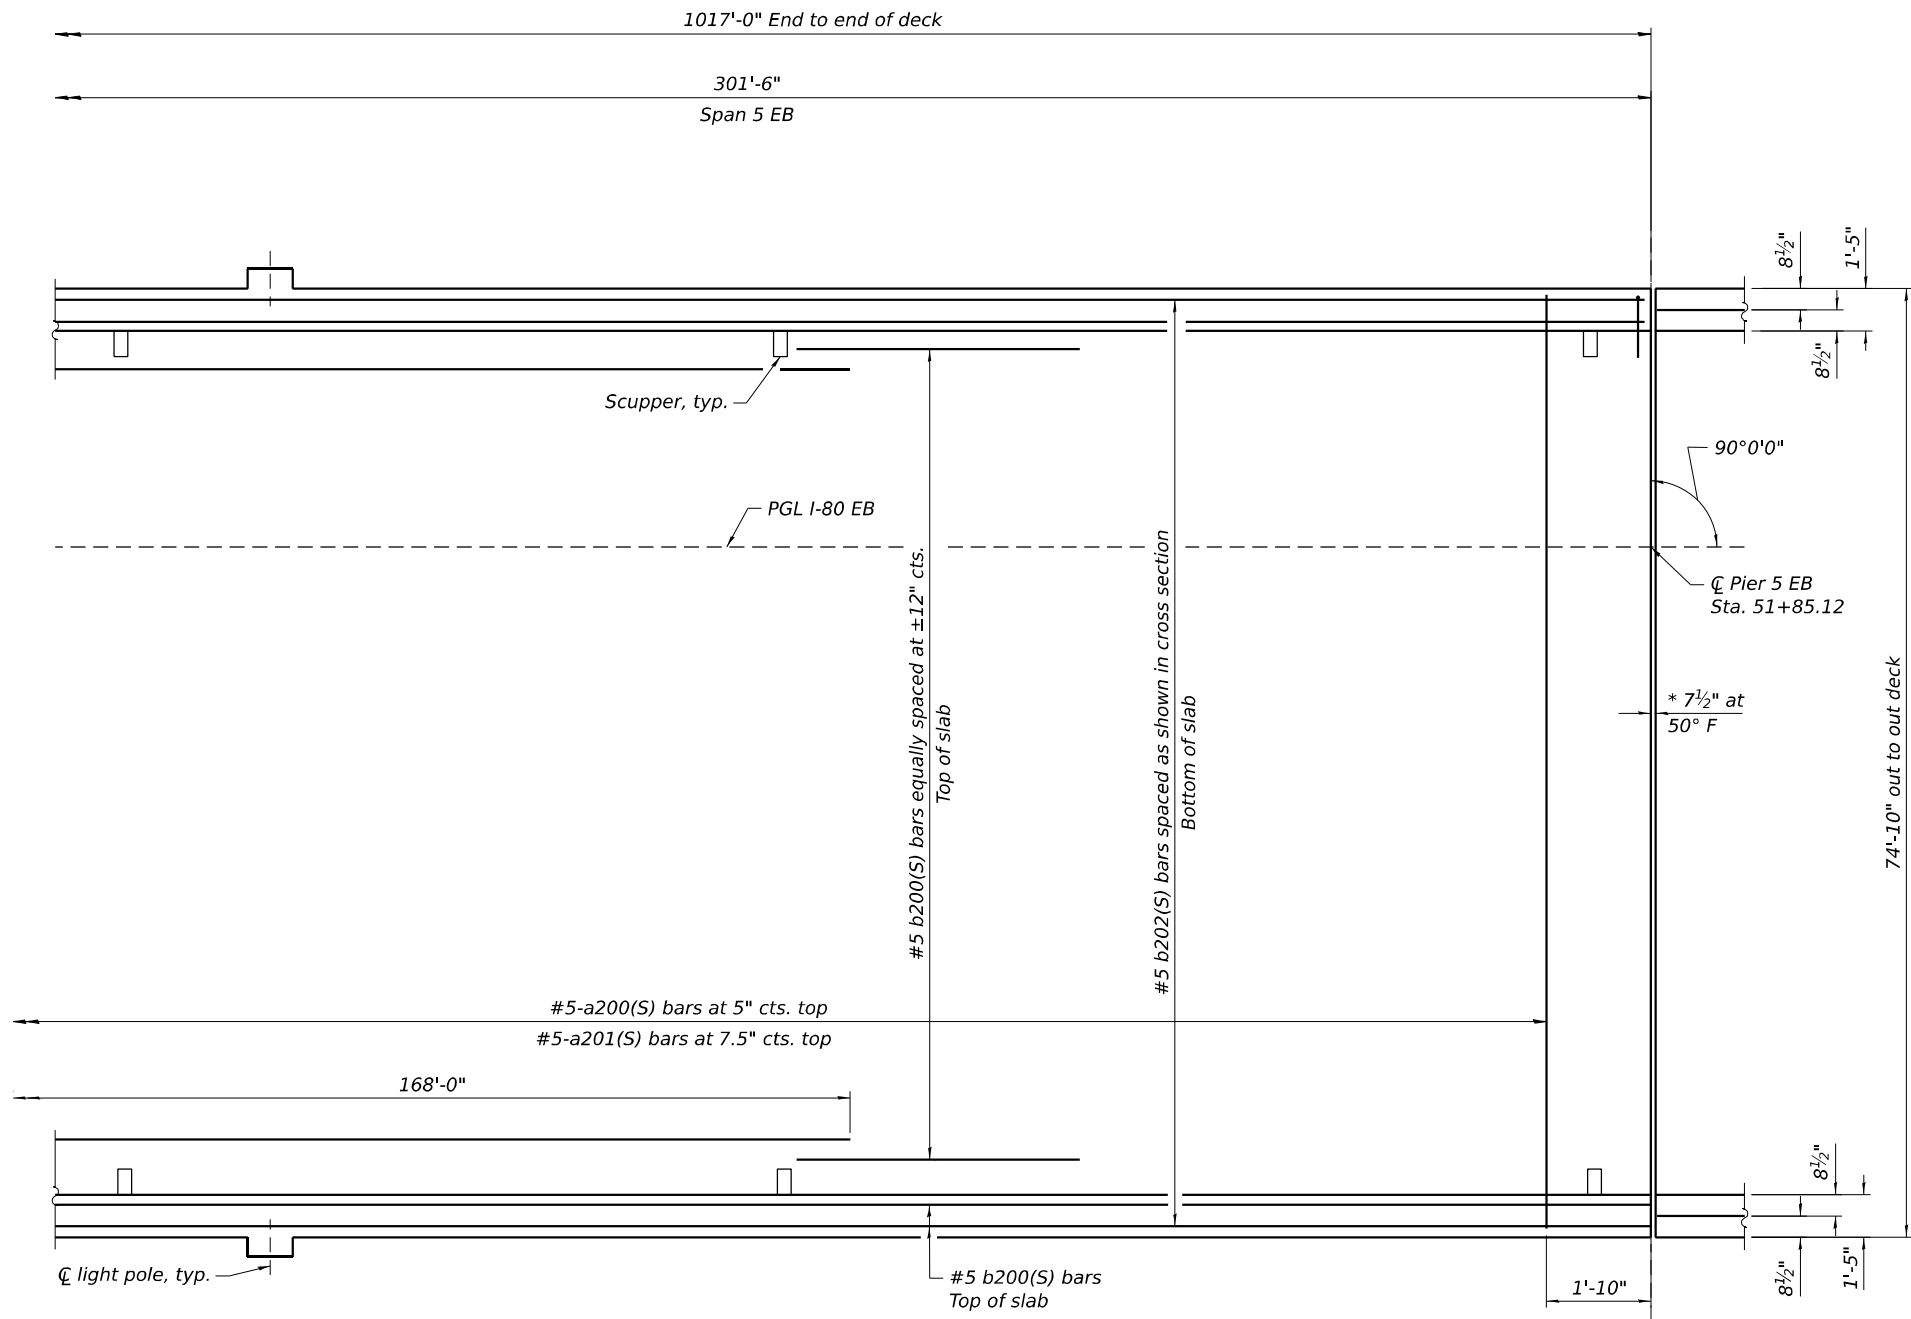

PLAN - UNIT 2 EB

* Dimension showing concrete opening. For joint opening and bars near joint see sheet S-158

MINIMUM BAR LAP
#5 bar = 3'-6"
#6 bar = 4'-10"

NOTES:

- See sheet S-123 for superstructure details and Bill of Material.
- Bars indicated thus, 32 x 2 - #5 etc. indicates 32 lines of bars with 2 lengths per line.
- For Cross Section see sheet S-120.

MODEL Default:
FILE NAME: p:\proj\transystems-pw\bartley.com\transys\corp-pw\labeled\Documents\Projects_2018\CH401\401180022\03-WSP\CAD\62R23-RB-1-Sheets\Structural\0998309-42R23-S319-D210.dgn



WSP USA Inc.

30 N. LA SALLE STREET

SUITE 4000

CHICAGO, IL 60602

TEL: (312) 782-8150

FAX: (312) 782-1684

USER NAME	= USSJ696614	DESIGNED -	PK	REVISED -	
		CHECKED -	LAS	REVISED -	
PLOT SCALE	= 32,000 ' / in.	DRAWN -	BK	REVISED -	
PLOT DATE	= 11/5/2025	CHECKED -	LAS	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DECK PLAN 3 - UNIT 2 EB
STRUCTURE NUMBER 099-8309 WB AND 099-8325 EB

SHEET S-119 OF 5-333 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-80	FAI 80 21 STRUCTURE 2	WILL	1230	700
CONTRACT NO. 62R23				
		ILLINOIS	FED. AID PROJECT	