TYPICAL BENCHING ON EXISTING EMBANKMENT

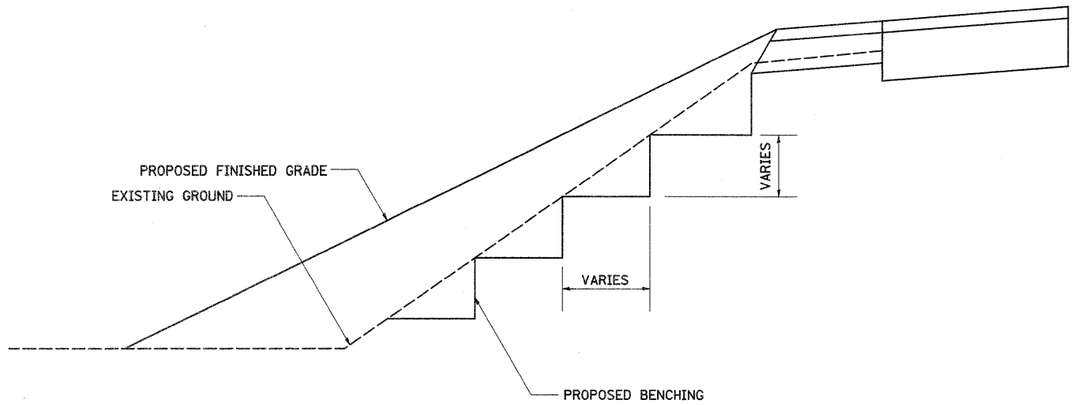

REVISED - 2-22-06

TYPICAL BENCHING ON EXISTING EMBANKMENT 50.4

TREE REPLACEMENT SCHEDULE

CODE NUMBER	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	QUANTITY
A2001714	ACER SACCHARUM	SUGAR MAPLE	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	30
A2005114	JUGLANS NIGRA	BLACK WALNUT	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	30
A2006514	QUERCUS BICOLOR	SWAMP WHITE OAK	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	30
A2006714	QUERCUS MACROCARPA	BUR OAK	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	30
A2007114	QUERCUS RUBRA	RED OAK	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	30
B2002614	MALUS ADAMS	ADAMS CRABAPPLE	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	35
B2004814	MALUS SARGENTII	SARGENT CRABAPPLE	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	35
B2005214	MALUS SUTYZAM	SUGAR TYME CRABAPPLE	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	35
C2001748	CORNUS SERICEA CARDINAL	CARDINAL REDOSIER DOGWOOD	4' HEIGHT, BALLED AND BURLAPPED	EACH	35
D2002972	PINUS STROBES	EASTERN WHITE PINE	6' HEIGHT, BALLED AND BURLAPPED	EACH	20

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

TREE REPLACEMENT SCHEDULE 90.4

TYPICAL MEDIAN CROSSOVER CLOSURE

GENERAL NOTES

WOOD POSTS, CABLE, AND SIGN SUPPORTS SHALL BE IN ACCORDANCE WITH SECTION 634 & 636 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
THE PANELS SHALL BE ANCHORED TO THE (3/8) CABLE IN SUCH A MANNER SO THEY CANNOT SLIDE ALONG THE CABLE.

THE REFLECTIVE SHEETING USED FOR THE PANELS SHALL MEET THE REQUIREMENTS OF SECTION 1091 OF THE STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION AND SHALL BE ON BOTH SIDES.

ALL PANELS SHALL HAVE ALTERNATING REFLECTORIZED WHITE & RED STRIPES SLOPING DOWNWARD AT 45° TOWARD THE SIDE ON WHICH TRAFFIC WILL PASS AND ON BOTH SIDES OF PANEL. THE DRILLING OF 75 (3) HOLES SHALL BE INCLUDED TO THE MEDIAN CLOSURE.

THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR MEDIAN CLOSURE.

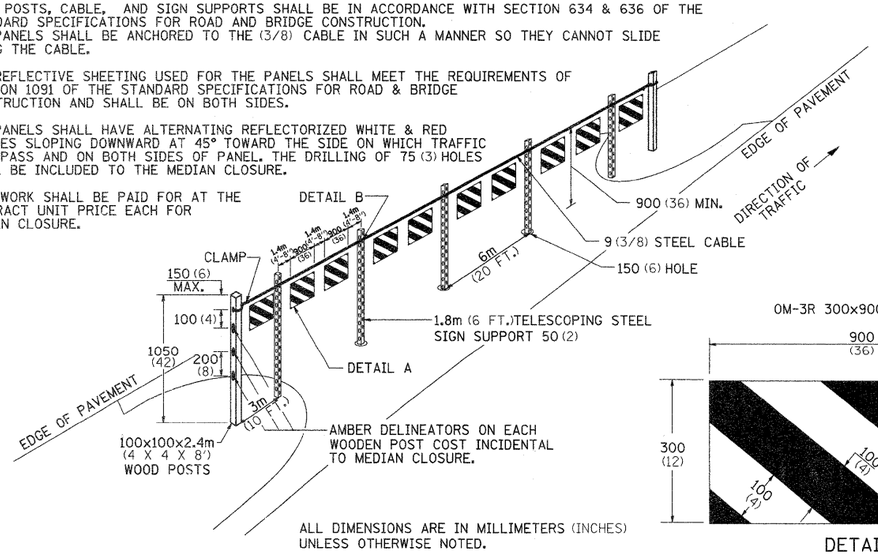



DETAIL B

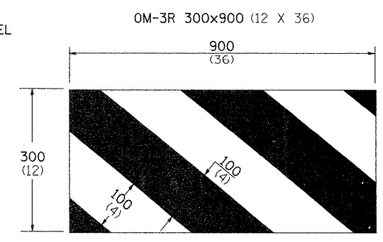

DETAIL A

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 5-27-09

TYPICAL MEDIAN CROSSOVER CLOSURE 98.4

REVISED -	REGION 2 / DISTRICT 2 STANDARD	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS / SHEET NO.
REVISED -		301	31T	JO DAVIESS	160 / 57
REVISED -				CONTRACT NO. 64D92	
REVISED -	SCALE: 50.0000 ' / IN. SHEET NO. OF SHEETS STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT	

PLOT DATE = Wed Dec 09 12:07:54 2009