RESURFACING SCHEDULE

STATION TO STATION	LENGTH	AVERAGE PAVEMENT WIDTH	AREA	HOT-MIX ASPHALT SURFACE REMOVAL, 1/2"	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N70	LEVELING BINDER (MACHINE METHOD), N70	AGGREGATE SHOULDERS, TYPE B	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	TEMPORARY RAMP	HOT-MIX ASPHALT SURFACE REMOVAL, 1 1/2"
	FOOT	FOOT	SQ YD	SQ YD	GALLON	TON	TON	TON	TON	SQ YD	SQ YD	SQ YD
707+50.00 TO 707+95.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
707+95.00 TO 1236+25.00	52830.0	22.0	129140.0	129140.0	12914.0	258.3	10847.8	5423.9	11946.9	0.0	0.0	0.0
1236+25.00 TO 1236+70.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1236+70.00 TO 1238+11.00	141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1238+11.00 TO 1238+56.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1238+56.00 TO 1246+92.00	836.0	22.0	2043.6	2043.6	204.4	4.1	171.7	85.8	222.2	0.0	0.0	0.0
1246+92.00 TO 1247+37.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1247+37.00 TO 1248+88.00	151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1248+88.00 TO 1249+33.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1249+33.00 TO 1295+62.00	4629.0	22.0	11315.3	11315.3	1131.5	22.6	950.5	475.2	1046.8	0.0	0.0	0.0
1295+62.00 TO 1296+07.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1296+07.00 TO 1300+27.00	420.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1300+27.00 TO 1300+72.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1300+72.00 TO 1337+19.00	3647.0	22.0	8914.9	8914.9	891.5	17.8	748.9	374.4	824.8	0.0	0.0	0.0
1337+19.00 TO 1337+64.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1337+64.00 TO 1345+14.00	750.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1345+14.00 TO 1345+59.00	45.0	22.0	110.0	0.0	11.0	0.2	9.2	4.6	12.0	110.0	12.2	0.0
1345+59.00 TO 1358+04.00	1245.0	22.0	3043.3	3043.3	304.3	6.1	255.6	127.8	330.8	0.0	0.0	0.0
1358+04.00 TO 1358+84.00	80.0	22.0	195.6	0.0	19.6	0.4	16.4	8.2	21.3	0.0	0.0	0.0
1358+84.00 TO 1365+05.00	621.0	22.0	1518.0	0.0	151.8	3.0	127.5	0.0	0.0	0.0	12.2	1518.0
TOTALS	65755.0		157161.0	154457.0	15716.0	314.0	13201.0	6537.0	14500.0	990.0	122.0	1518.0

PAVEMENT MARKING SCHEDULE

STATION TO STATION	LENGTH	PAINT PAVEMENT MARKING - LINE 4"	TEMPORARY PAVEMENT MARKING - LINE 4"	SHORT-TERM PAVEMENT MARKING	WORK ZONE PAVEMENT MARKING REMOVAL	RAISED REFLECTIVE PAVEMENT MARKER
	FOOT	FOOT	FOOT	FOOT	SQ FT	EACH
707+50.00 TO 1236+70.00	52920.0	119070.0	119070.0	15876.0	1764.0	662.0
1236+70.00 TO 1238+11.00	141.0	317.3	317.3	0.0	0.0	0.0
1238+11.00 TO 1247+37.00	926.0	2083.5	2083.5	276.0	30.7	12.0
1247+37.00 TO 1248+88.00	151.0	339.8	339.8	0.0	0.0	0.0
1248+88.00 TO 1296+07.00	4719.0	10617.8	10617.8	1416.0	157.3	59.0
1296+07.00 TO 1300+27.00	420.0	945.0	945.0	0.0	0.0	0.0
1300+27.00 TO 1337+64.00	3737.0	14527.3	14527.3	1116.0	124.0	47.0
1337+64.00 TO 1345+14.00	750.0	1687.5	1687.5	0.0	0.0	0.0
1345+14.00 TO 1365+05.00	1991.0	4479.8	4479.8	600.0	66.7	25.0
TOTALS		154068.0	154068.0	19284.0	2143.0	805.0

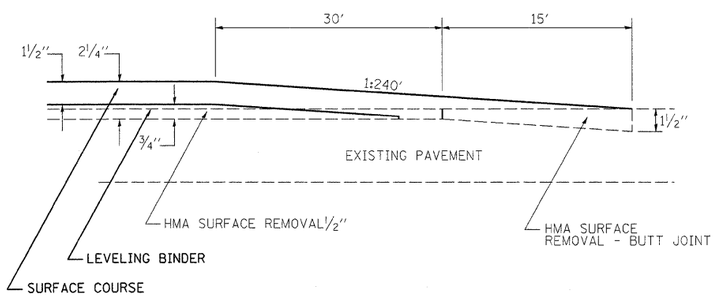

MILLING DETAILS

(NORTH END OF PROJECT)

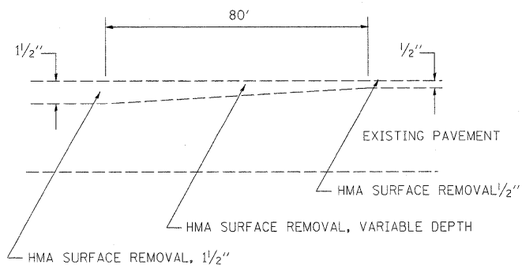

TRANSITION BETWEEN INLAY AND OVERLAY

FILE NAME = c:\pw_work\PWIDOT\TEASLEYCK\d0123166\D774371-sht-schedule.dgn	USER NAME = teasleyck	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 50.0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 12/2/2009	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
828	(106,107)RS-2	Clay	9	6

CONTRACT NO. 74371

ILLINOIS FED. AID PROJECT