


TEMP. DITCH CHECK SPACING

SLOPE (%)	HEIGHT AT CENTER OF DITCH CHECK (OVERFLOW PT) (INCHES)	SPACING OF DITCH CHECK (FEET)
8.0	12"	10
	18"	20
	24"	25
7.0	12"	15
	18"	20
	24"	30
6.0	12"	15
	18"	25
	24"	35
5.0	12"	20
	18"	30
	24"	40
4.0	12"	25
	18"	35
	24"	50
3.0	12"	35
	18"	50
	24"	65
2.0	12"	50
	18"	75
	24"	100
1.0 & UNDER	12"	100
	18"	150
	24"	195

EROSION CONTROL KEY

- INLET AND PIPE PROTECTION
- PERIMETER EROSION BARRIER
- TEMPORARY DITCH CHECK
- EROSION CONTROL BLANKET
- RIP-RAP (CLASS INDICATED IN SCHEDULE)

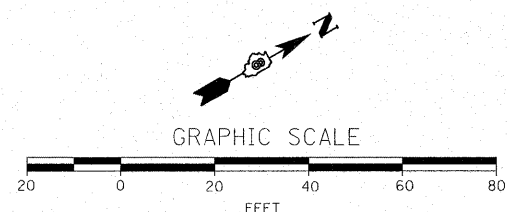

FILE NAME = 0876830-sht-eros-swppp.dgn	USER NAME = che	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EROSION CONTROL PLAN			F.A. RTE. 600	SECTION 60-(30.31.128)-1	COUNTY	TOTAL SHEETS 399	SHEET NO. 139	
	PLOT SCALE = 1:20	DRAWN -	REVISED -		SCALE: 1:20	SHEET NO. OF SHEETS	STA. 104+00.00 TO STA. 110+00.00	CONTRACT NO. 76830		ILLINOIS FED. AID PROJECT			
	PLOT DATE = 8/24/2009	CHECKED -	REVISED -										
		DATE -	REVISED -										