


PROPOSED TYPICAL SECTION

I-55 STA. 1054+20.00 TO STA. 1079+50.00
 W. FRONTAGE RD. STA. 1058+95.00 TO STA. 1075+00.00
 (N.B. BRIDGE OMISSION STA. 1065+17.19 TO STA. 1065+79.61)
 (S.B. BRIDGE OMISSION STA. 1066+26.75 TO STA. 1066+89.17)
 (W. FRONTAGE RD. BRIDGE OMISSION STA. 1067+12.80 TO STA. 1067+77.80)

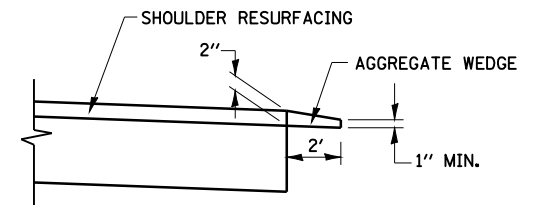

AGGREGATE WEDGE SHOULDER DETAIL

NOTE 1:
 - PREFORMED PLASTIC PAVEMENT MARKING, TYPE B, INLAID TO BE USED FOR SKIP DASHED ON HMA.
 - URETHANE TO BE USED FOR EDGE LINES AND MARKINGS ON CONCRETE (BRIDGE DECKS)

EXISTING LEGEND

- ① EX LONGITUDINAL JOINT
- ② EX STABILIZED SUB-BASE 4"
- ③ EX BURIED PCC PAVEMENT 10"
- ④ EX CRC PAVEMENT 9"
- ⑤ EX PCC PAVEMENT 10"
- ⑥ EX HOT-MIX ASPHALT 4 1/4"
- ⑦ EX PIPE UNDERDRAINS 4"
- ⑧ EX PIPE UNDERDRAINS 6"
- ⑨ EX HOT-MIX ASPHALT SHOULDERS
- ⑩ EX AGGREGATE SHOULDERS
- ⑪ EX EARTH SHOULDERS

PROPOSED LEGEND

- ⑳ PR HOT-MIX ASPHALT SURFACE REMOVAL 4 1/4"
- ㉑ PR POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, 2 3/4"
- ㉒ PR POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, 1 1/2"
- ㉓ PR HOT-MIX ASPHALT SHOULDER, 2"
- ㉔ EX FULL DEPTH PAVEMENT
- ㉕ PR POLYMERIZED LEVELING BINDER (MACHINE METHOD), VARIABLE DEPTH (2 1/4" MIN)
- ㉖ PR POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, 1 1/2"
- ㉗ PR HOT-MIX ASPHALT SHOULDERS 12"
- ㉘ PR AGGREGATE WEDGE SHOULDER, TYPE B (SEE DETAIL)
- ㉙ PR AGGREGATE SHOULDERS, TYPE B, 6"
- ㉚ PR PREFORMED PLASTIC PAVEMENT MARKING, TYPE B, INLAID-LINE 5" (SEE NOTE 1)
- ㉛ PR PAINT PAVEMENT MARKING
- ㉜ PR URETHANE PAVEMENT MARKING-LINE 5" (SEE NOTE 1)

FILE NAME =	USER NAME = laughlinr1	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FAI 55 & FAS 1769			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
et:\pw\work\PWIDOT\LAUGHLINRL\0110282\prop_typicals.dgn	DRAWN -	REVISED -	• 68-4B-1 & 111BR					MONTGOMERY	145	7		
PLOT SCALE = 80.0000' / IN.	CHECKED -	REVISED -	• FAI 55 & FAS 1769					CONTRACT NO. 72A63				
PLOT DATE = Dec-03-2008 07:32:50AM	DATE -	REVISED -	FED. ROAD DIST. NO.					ILLINOIS	FED. AID PROJECT			