



PIER 1
NORTH FACE
(LOOKING SOUTH)

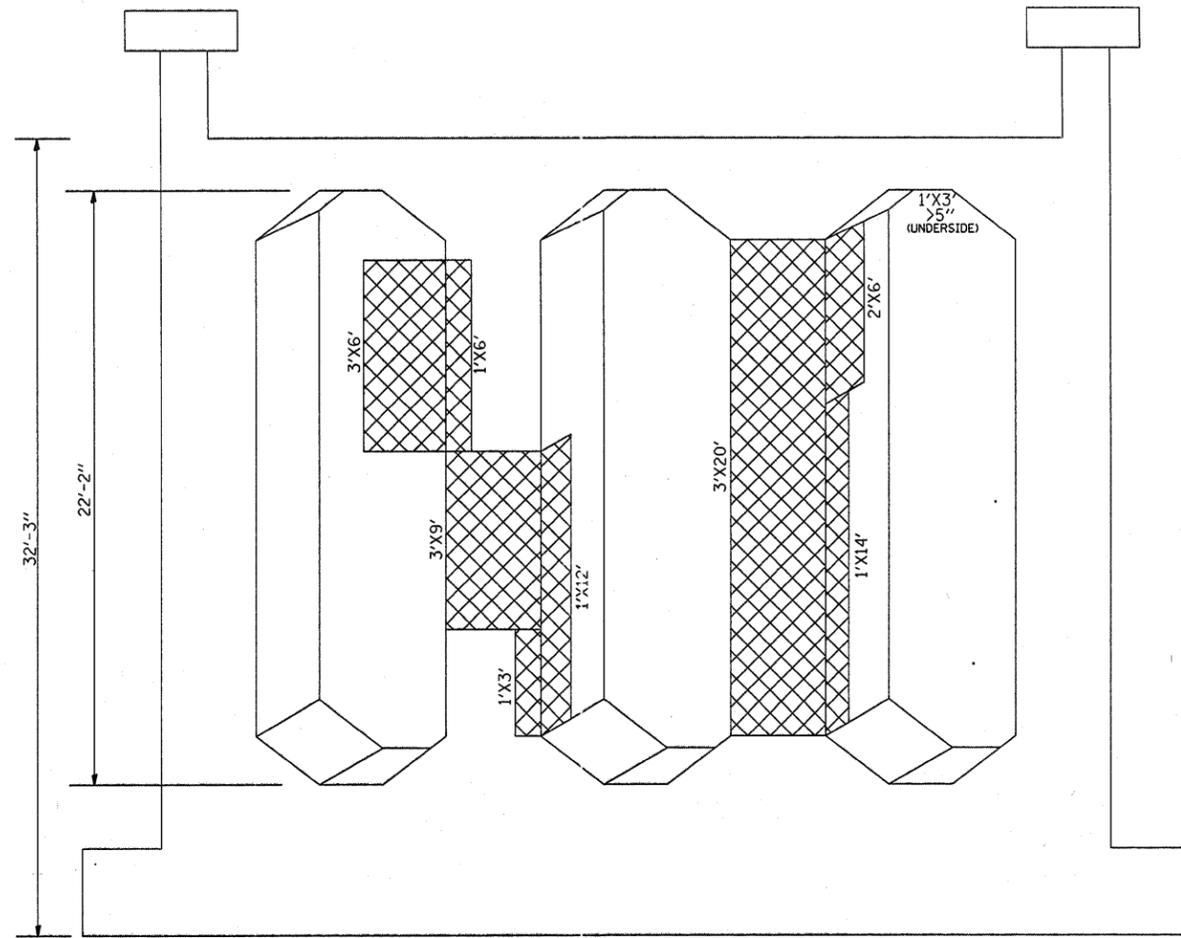

PIER 1
SOUTH FACE
(LOOKING NORTH)

WORK ON INTERIOR COLUMN FACES SHOULD BE DONE IN SEQUENCE SO ADJACENT FACES OF THE SAME COLUMN ARE NOT DONE SIMULTANEOUSLY.

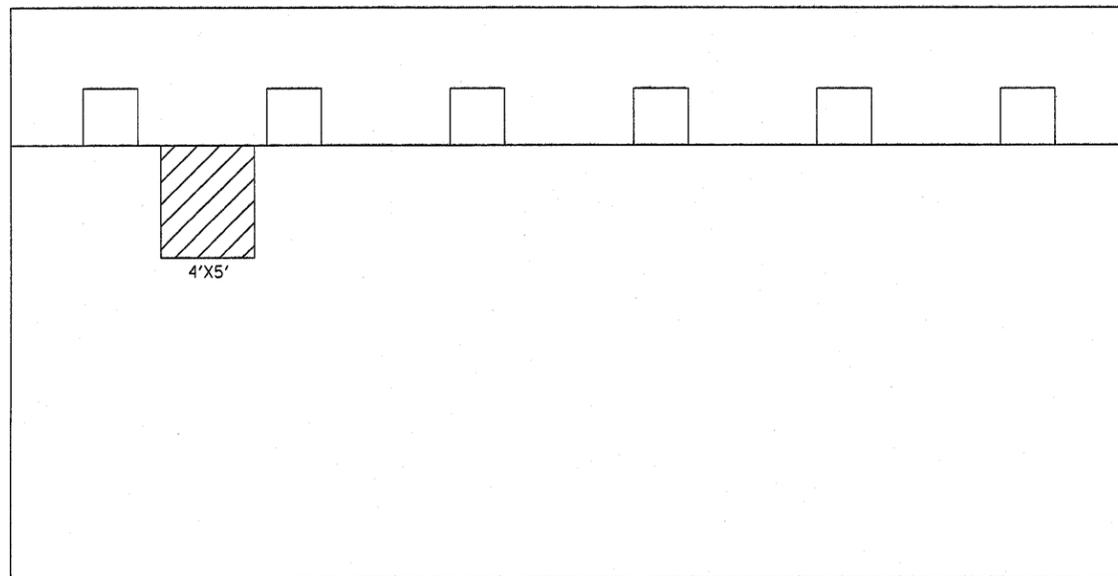

SOUTH ABUTMENT
LOOKING SOUTH

SN 016-0618 TOTAL BILL OF MATERIAL	UNIT	QUANTITY
STRUCTURAL REPAIR OF CONCRETE > 5"	SQ FT	315
STRUCTURAL REPAIR OF CONCRETE ≤ 5"	SQ FT	20

- STRUCTURAL REPAIR OF CONCRETE > 5"
- STRUCTURAL REPAIR OF CONCRETE ≤ 5"

FILE NAME =	USER NAME = midyja	DESIGNED -	REVISED -
c:\projects\dl120507\sherdan@ravines.dgn		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION 5: SN 016-0618
STRUCTURAL REPAIR

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VARIOUS	2007-0071	VARIOUS	25	22
CONTRACT NO. 60C36				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				