



ILLUMINATION GENERAL NOTES

1. THE LATEST EDITIONS OF THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" PREPARED BY THE ILLINOIS DEPARTMENT OF TRANSPORTATION AND THE SUPPLEMENTAL "SPECIAL PROVISIONS" SHALL GOVERN ALL WORK ASSOCIATED WITH THIS PROJECT.
2. THE LOCATIONS OF THE UTILITIES AS SHOWN ON THE PLANS ARE APPROXIMATE ONLY AND MUST BE VERIFIED BY EACH RESPECTIVE UTILITY COMPANY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY ALL THE PUBLIC UTILITY COMPANIES (GAS, ELECTRIC, TELEPHONE, ETC.) PRIOR TO THE COMMENCEMENT OF CONSTRUCTION FOR EXACT FIELD LOCATION OF ALL UTILITIES.
3. SERVICE POLE LOCATIONS AND CONTROL CENTER LOCATIONS ARE APPROXIMATE. ACTUAL LOCATIONS SHALL BE DETERMINED BY THE ENGINEER IN THE FIELD.
4. ALL ITEMS INCLUDED IN THE PLANS OR SPECIAL PROVISIONS NOT APPEARING IN THE SUMMARY OF QUANTITIES SHALL BE CONSIDERED INCIDENTAL TO THE COST OF CONSTRUCTION.
5. GALVANIZED STEEL CONDUIT SHALL BE PLACED UNDER ALL PAVEMENT CROSSINGS OF THE SIZE AND LOCATION INDICATED ON THE PLANS. PAYMENT SHALL BE LIMITED TO THE ACTUAL WIDTH OF PAVEMENT TO BE PUSHED PLUS TWO FEET (2') ON EACH SIDE OF PAVEMENT.
6. ALL CABLE OR CONDUIT SHALL BE AS SHOWN ON THE PLANS UNLESS OTHERWISE DIRECTED BY THE ENGINEER AND SHALL BE AT A BURIAL DEPTH OF THIRTY INCHES (30") BELOW EXISTING GRADES.
7. ANY PERMANENT TYPE PAVEMENT, DRIVEWAY, OR SIDEWALK WHICH MUST BE REMOVED SHALL BE SAW CUT PRIOR TO REPLACEMENT.
8. ALL TRENCHES SHALL BE THOROUGHLY COMPACTED.
9. THE CONTRACTOR SHALL BE REQUIRED TO DISPOSE OF, OFF-SITE, ALL EXCAVATED OR EXCESS MATERIALS DUE TO CONSTRUCTION OPERATIONS, AT HIS EXPENSE. NO PAYMENT SHALL BE MADE FOR THE CONTRACTOR'S EXPENSE TO HAUL OR TRUCK THE MATERIAL TO DISTANT DUMPING SITES.



- 1 UNIT DUCT AS PER SPECIFICATIONS
- 2 WARNING TAPE INSTALLED ONLY WHEN UNIT DUCT IS INSTALLED BY TRENCHING
- 3 COMPACTED GRANULAR BACKFILL (CA-6) IN AREAS UNDER PAVEMENT. COMPACTED SELECTED BACKFILL IN TURF AREAS.

TYPICAL TRENCH DETAIL

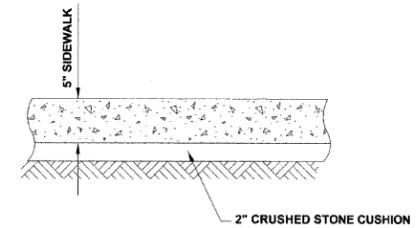

P.C.C. SIDEWALK, 5"

Drawing file: W:\Projects\0803085 - Prairie Path Improvements 2.dwg Jun 04, 2008 - 11:24am

	◆ Civil Engineers	9933 Roosevelt Road
	◆ Municipal Consultants	Westchester, Illinois 60154-2780
	◆ Established 1911	Phone: 708/865-0300
		Fax: 708/865-1212

ILLINOIS PRAIRIE PATH IMPROVEMENTS
VILLAGE OF BELLWOOD, ILLINOIS

LIGHTING & PCC SIDEWALK, 5" DETAILS

ATB 12-19-07	SCALE: NOT TO SCALE	SHEET 5 OF 11
LEV 11-26-07	DRAWN BY: MK/LEV	
LEV 11-14-07	BOOK NO.: AERIAL	
PER IDOT REVIEW MK 5-22-07	DATE: 2-9-07	
REVISION:	E.H.E. NO.: 080-03-08580	