

EAST EDGE OF SHOULDER


Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Apr. Slab	842+53.07	-18.00	644.01
A1	842+63.07	-18.00	644.03
A2	842+73.07	-18.00	644.05
S. End of N. Apr. Slab	842+83.07	-18.00	644.06

EAST EDGE OF PAVEMENT

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Apr. Slab	842+56.53	-12.00	644.14
A1	842+66.53	-12.00	644.16
A2	842+76.53	-12.00	644.18
S. End of N. Apr. Slab	842+86.53	-12.00	644.19

☉ ROADWAY & PROFILE GRADE (S.B.)

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Apr. Slab	842+63.46	0.00	644.34
A1	842+73.46	0.00	644.36
A2	842+83.46	0.00	644.37
S. End of N. Apr. Slab	842+93.46	0.00	644.38

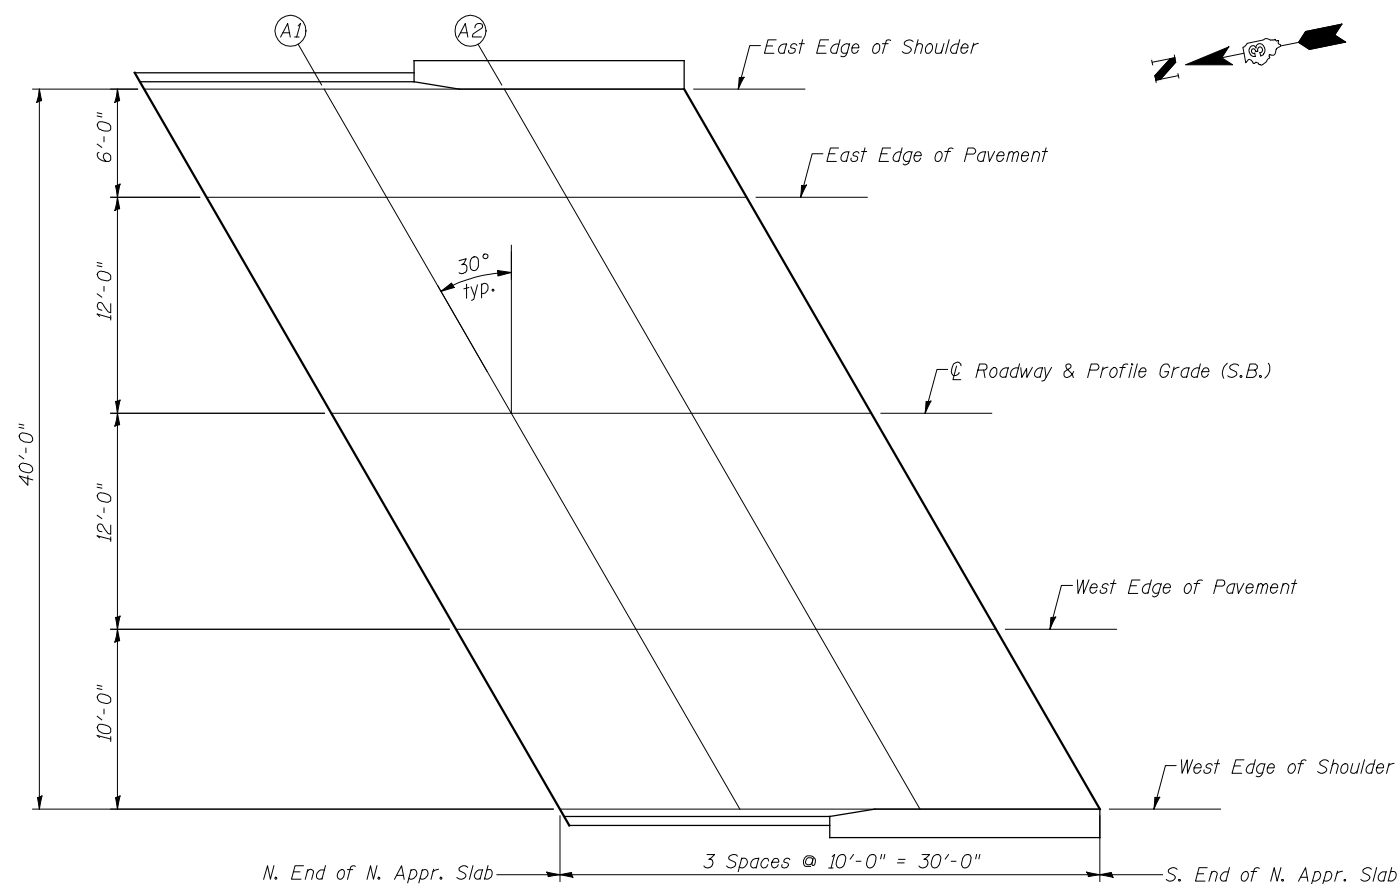

PLAN

North Approach (S.B.)

* Offsets are measured from ☉ Roadway & PGL (S.B.)


WEST EDGE OF PAVEMENT

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Apr. Slab	842+70.39	12.00	644.17
A1	842+80.39	12.00	644.18
A2	842+90.39	12.00	644.19
S. End of N. Apr. Slab	843+00.39	12.00	644.20

WEST EDGE OF SHOULDER

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Apr. Slab	842+76.16	22.00	643.97
A1	842+86.16	22.00	643.98
A2	842+96.16	22.00	643.99
S. End of N. Apr. Slab	843+06.16	22.00	644.00

KEY PLAN

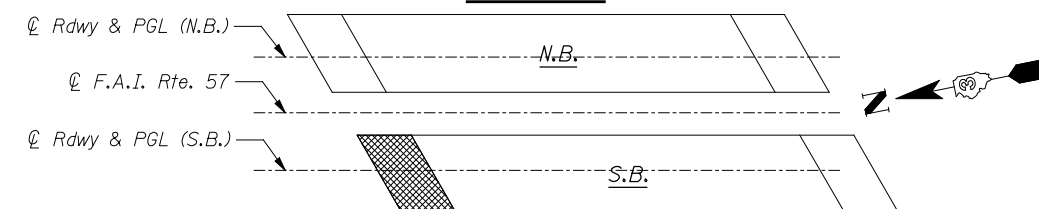

1/28/2013 4:45:59 PM 0380215_66944_013_APPRELY_03.dgn



DESIGNED	BJM	REVISED	
CHECKED	TAY	REVISED	
DRAWN	MWS	REVISED	
CHECKED	BJM	REVISED	

PLOT DATE = 1/28/2013

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TOP OF NORTH APPROACH SLAB ELEVATIONS
STRUCTURE NO. 038-0215 (S.B.)**

SHEET NO. 13 OF 38 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	141 BR(SB) & 38-1 BR(NB)	IROQUOIS	138	51
CONTRACT NO. 66944				
ILLINOIS FED. AID PROJECT				