



FAU ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
8071	*	SANGAMON	559	80
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		
(84-9-4)A,HBK,BY,BY-1		* 02-00382-02-PV		


CENTERLINE POINTS SET BUT NOT REFERENCED		
POINT NO.	STATION	DESCRIPTION
MAC P7	P.C. STA. 815+96.39	SET 5/8" IRON PIN BURIED
MAC P17	P.I. STA. 821+60.84	SET 5/8" IRON PIN BURIED
MAC PT7	P.T. STA. 827+17.88	SET 5/8" IRON PIN BURIED
MAC PC8	P.C. STA. 828+20.08	SET 5/8" IRON PIN BURIED
MAC P18	P.I. STA. 835+21.51	SET 5/8" IRON PIN BURIED
MAC PC9	P.C. STA. 842+57.10	SET 5/8" IRON PIN BURIED
MAC P19	P.I. STA. 850+50.58	SET 5/8" IRON PIN BURIED
MAC PT9	P.T. STA. 858+23.72	SET 5/8" IRON PIN BURIED
MAC PC10	P.C. STA. 867+72.90	SET 5/8" IRON PIN BURIED
MAC P110	P.I. STA. 870+30.23	SET 5/8" IRON PIN BURIED
MAC PC11	P.C. STA. 872+68.69	SET 5/8" IRON PIN BURIED
LB P1	STA. 821+70.50 @ MACARTHUR BLVD = STA. 180+00.00 @ LINCOLNSHIRE BLVD	SET 5/8" IRON PIN BURIED
IJR P1	P.O.T. STA. 308+00.00	SET 5/8" IRON PIN BURIED
IJR P2	P.O.T. STA. 312+00.00	SET 5/8" IRON PIN BURIED
IJR P3	STA 841+43.54 @ MACARTHUR BLVD = STA. 310+00.00 @ ILES JUNCTION RD.	SET 5/8" IRON PIN BURIED
WB P1	P.O.T. STA. 502+50.00	SET 5/8" IRON PIN BURIED
WB P2	P.O.T. STA. 507+50.00	SET 5/8" IRON PIN BURIED
WB P3	STA. 852+51.56 @ MACARTHUR BLVD = STA. 505+00.00 @ WESTCHESTER BLVD	SET 5/8" IRON PIN BURIED
CEN P2	STA. 13+95.62 @ CENTRE ST = STA. 866+32.28 @ MACARTHUR BLVD	SET 5/8" IRON PIN BURIED
RAMPA PC2	P.C. STA. 25+93.47	SET 5/8" IRON PIN BURIED
RAMPA P12	P.I. STA. 26+58.48	SET 5/8" IRON PIN BURIED
RAMPA PT2	P.T. STA. 27+22.94	SET 5/8" IRON PIN BURIED
RAMPB P12	P.I. STA. 35+87.62	SET 5/8" IRON PIN BURIED
RAMPB PT2	P.T. STA. 38+91.36	SET 5/8" IRON PIN BURIED
RAMPC PC1	P.C. STA. 40+40.00	SET 5/8" IRON PIN BURIED
RAMPC P11	P.I. STA. 46+29.22	NOT SET
RAMPC PT1	P.T. STA. 51+82.35	SET 5/8" IRON PIN BURIED
RAMPC 100	STA. 58+00.63 @ RAMP C = STA. 796+39.03 @ MACARTHUR BLVD	SET 5/8" IRON PIN BURIED
RAMPD P11	P.I. STA. 45+12.82	SET 5/8" IRON PIN BURIED
RAMPD PT1	P.T. STA. 46+17.98	SET 5/8" IRON PIN BURIED
REC 100	P.I. STA. 100+00.00	SET 5/8" IRON PIN BURIED
REC PC1	P.C. STA. 102+51.41	SET 5/8" IRON PIN BURIED
REC P11	P.I. STA. 104+86.03	SET 5/8" IRON PIN BURIED
REC PT1	P.T. STA. 106+56.30	SET 5/8" IRON PIN BURIED
REC PC2	P.C. STA. 123+17.42	SET 5/8" IRON PIN BURIED

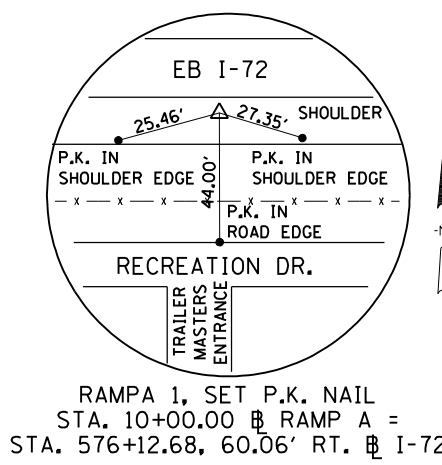


RAMPA 1, SET P.K. NAIL STA. 10+00.00 @ RAMP A = STA. 576+12.68, 60.06' RT. @ I-72

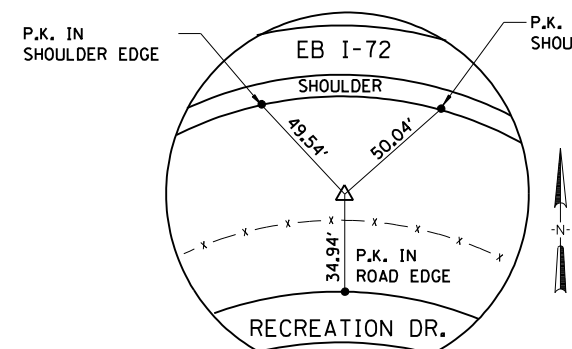


RAMPA PC1, SET 5/8" IRON PIN STA. 18+00.00 @ RAMP A

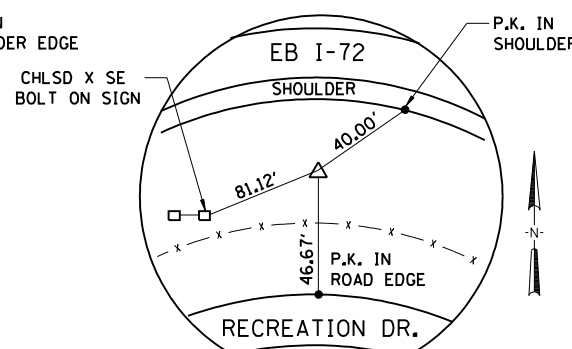


RAMPA P11, SET 5/8" IRON PIN STA. 20+58.67 @ RAMP A

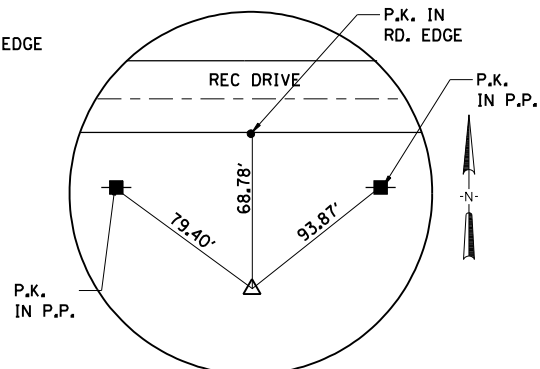


RAMPA P11, SET 5/8" IRON PIN STA. 22+98.41 @ RAMP A

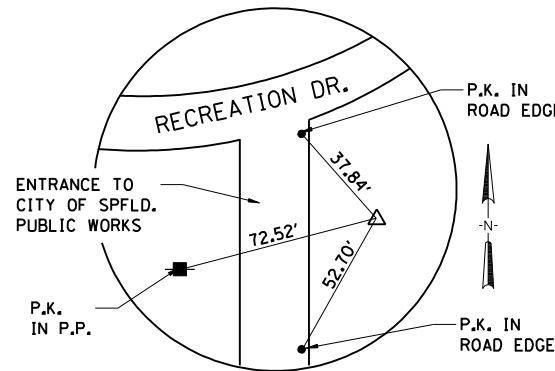


RAMPB PT1, SET 5/8" IRON PIN STA. 27+51.47 @ RAMP B

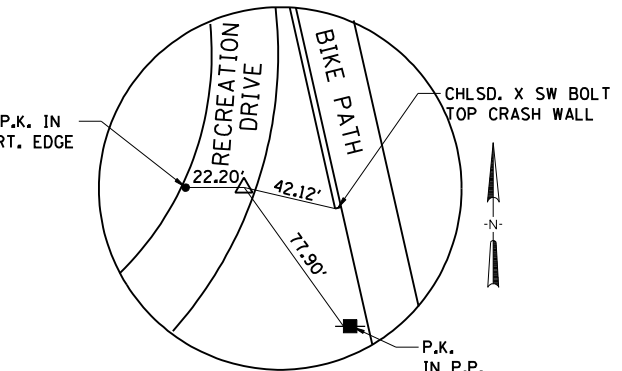


RAMPB PC2, SET P.K. NAIL STA. 32+81.62 @ RAMP B

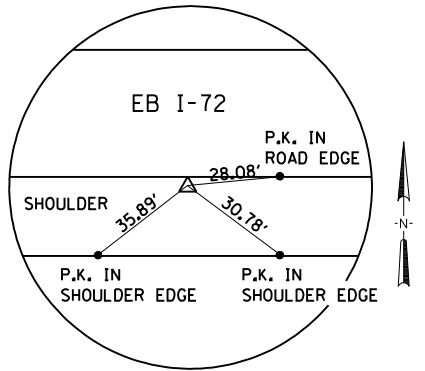


RAMP B1, SET P.K. NAIL STA. 50+41.36 @ RAMP B = STA. 623+49.18, 59.84' RT @ I-72

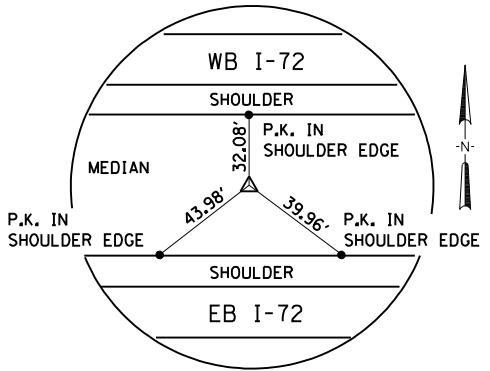


I72 MAC, SET 5/8" IRON PIN MAC I72 STA. 596+33.17 @ I-72 = STA. 792+77.64 @ MACARTHUR BLVD

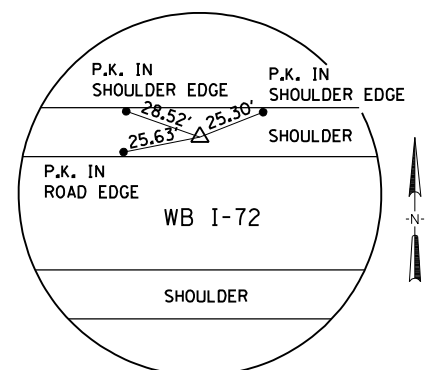


RAMP C 1, SET P.K. NAIL STA. 30+00.00 @ RAMP C = STA. 625+50.33, 59.89' LT. @ I-72

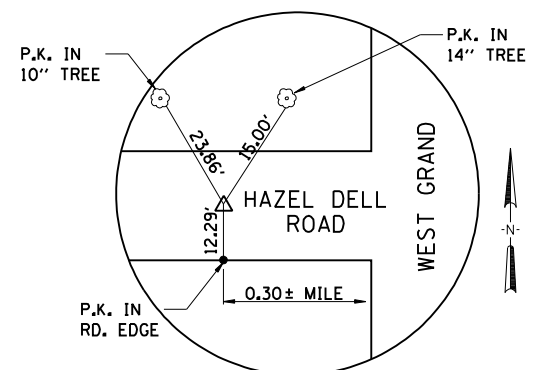


RAMPD PC1, SET P.K. NAIL STA. 44+04.35 @ RAMP D

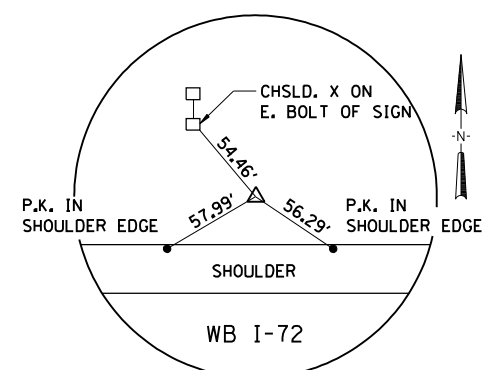


RAMPD P12, SET 5/8" IRON PIN STA. 55+13.12 @ RAMP D

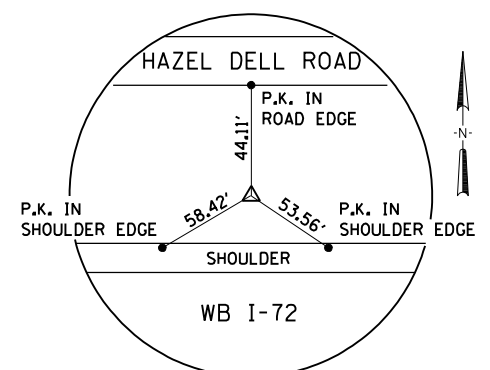


RAMPD PC1, SET 5/8" IRON PIN STA. 54+24.53 @ RAMP D =

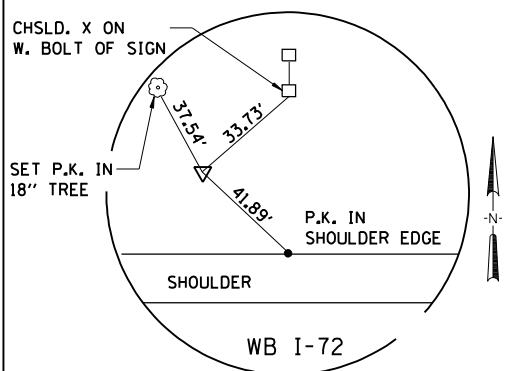


RAMPD PT2, SET 5/8" IRON PIN STA. 54+24.53 @ RAMP D

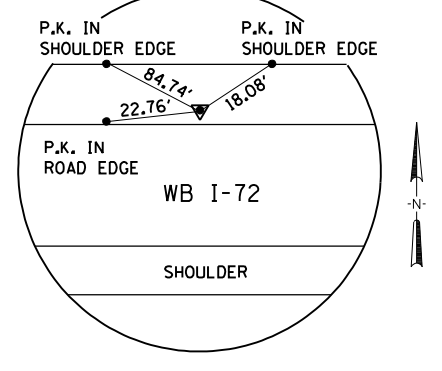

RAMPD 1, SET P.K. NAIL STA. 67+51.59 @ RAMP D = STA. 569+89.06, 60.24' LT. @ I-72

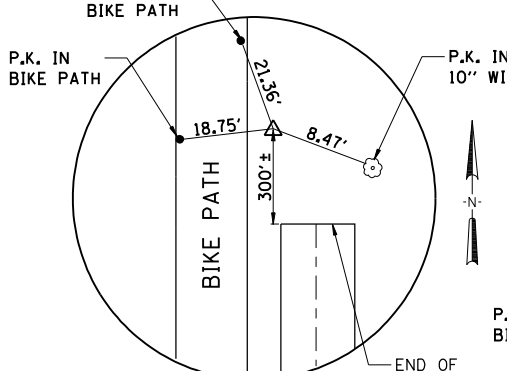

MAC PT8, SET 5/8" IRON PIN STA 841+08.82 @ MACARTHUR BLVD.

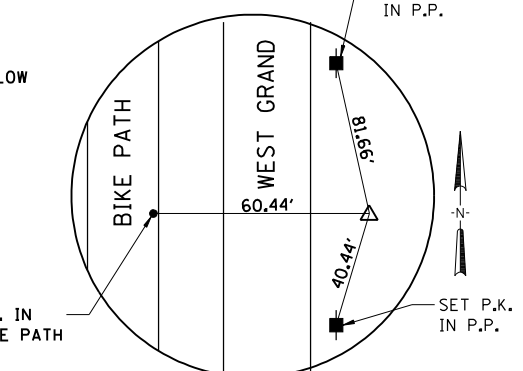

LB P2, SET 5/8" IRON PIN STA. 184+50.00 @ LINCOLNSHIRE BLVD



12/16/2006
\$FILES
LAYOUT
DRAWN
REVIEWED
CLG 08/05/06
CLG 09/05/06
JMD/JMD 09/05/06

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
ALIGNMENT TIES
FAI-72, MACARTHUR BLVD
SEC NO. 02-00382-02-PV
SEC NO. (84-9-4)A,HBK,BY,BY-1
SANGAMON COUNTY, ILLINOIS
SCALE: VERT. HORIZ.
DATE: 12/16/2006
DRAWN BY: JAP
CHECKED BY: GCR