

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PLANS FOR PROPOSED
LOCAL AGENCY IMPROVEMENT

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS
05-00030-01-FP	*	44	
STA. 67+20.50	TO STA.	89+83.95	
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJ. NO.	
* FULTON & PEORIA CONTRACT NO. 89395			



INDEX OF SHEETS:


- 1 COVER SHEET
- 2 SUMMARY OF QUANTITIES
- 3 EXISTING TYPICAL CROSS SECTION, LEGEND AND NOTES
- 4 PROPOSED TYPICAL CROSS SECTIONS
- 5-7 SCHEDULE OF QUANTITIES
- 8 CONTROL AND SURVEY TIES
- 9 STAGE CONSTRUCTION PLAN
- 10-17 PLAN AND PROFILE
- 18-21 EROSION CONTROL PLAN "SWPPP"
- 22 INTERSECTION DETAILS AND ELEVATIONS
- 23-25 PAVEMENT MARKING PLAN
- 26 MISCELLANEOUS ROADWAY DETAILS
- 27-31 TYPE G-1 SPECIAL DRAINAGE STRUCTURE DETAIL SHEET
- 32-44 CROSS SECTIONS

- STATE STANDARD DETAILS
- 000001-04 STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
 - 280001-03 TEMPORARY EROSION CONTROL SYSTEMS
 - 424001-04 CURB RAMPS FOR SIDEWALKS
 - 542301-01 PRECAST REINFORCED CONCRETE FLARED END SECTION
 - 602301-01 INLET - TYPE A
 - 602401-01 MANHOLE TYPE A
 - 602601-01 PRECAST REINFORCED CONCRETE FLAT SLAB TOP
 - 602701-01 CAST IRON STEPS
 - 604001-02 FRAMES AND LIDS, TYPE 1
 - 604036-01 GRATE TYPE 8
 - 606001-03 CONCRETE CURB TYPE B, AND COMB. CONCRETE CURB & GUTTER
 - 606006-01 OUTLETS FOR CONC. CURB & GUTTER TYPE B-6.24
 - 701301-02 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
 - 701311-02 LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
 - 701501-03 URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
 - 701701-04 URBAN LANE CLOSURE, MULTILANE INTERSECTION
 - 701801-03 LANE CLOSURE, MULTILANE 1W 0W 2W CROSSWALK OR SIDEWALK CLOSURE
 - 702001-06 TRAFFIC CONTROL DEVICES
 - 780001-01 TYPICAL PAVEMENT MARKINGS
 - BLR 21-6 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
 - BLR 22-4 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS (TWO-LANE TWO WAY RURAL TRAFFIC) (ROAD CLOSED TO THRU TRAFFIC)

CITY OF FARMINGTON
FULTON & PEORIA COUNTY
PROJECT NO. HPP-4095 (001)
JOB NO. C-94-076-06
LIGHTFOOT ROAD - 2400E
(IL RTE 116 TO SOUTH CORPORATE LIMIT)
SECTION 05-00030-01-FP


STRUCTURAL DESIGN DATA:

LIGHTFOOT ROAD (2400E) - LOCAL STREET
 POSTED SPEED = 30 MPH
 DESIGN SPEED = 30 MPH
 ADT (2005) 2400, (2016) 2535 DHV=300
 STRUCTURAL DESIGN TRAFFIC YEAR: 2016
 PC: 2294 SU: 231 MU: 10
 CLASS OF STREET: II
 TRAFFIC FACTOR: 0.24 AT 20 YEAR DESIGN PERIOD WITH 73,280 LB TRUCKS
 SUBGRADE SUPPORT RATING: POOR
 PAVEMENT STRUCTURAL MATERIALS: SEE PROPOSED TYPICAL SECTIONS

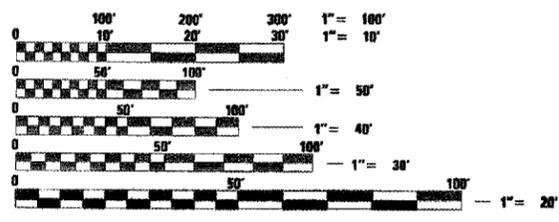

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES, REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES, IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123

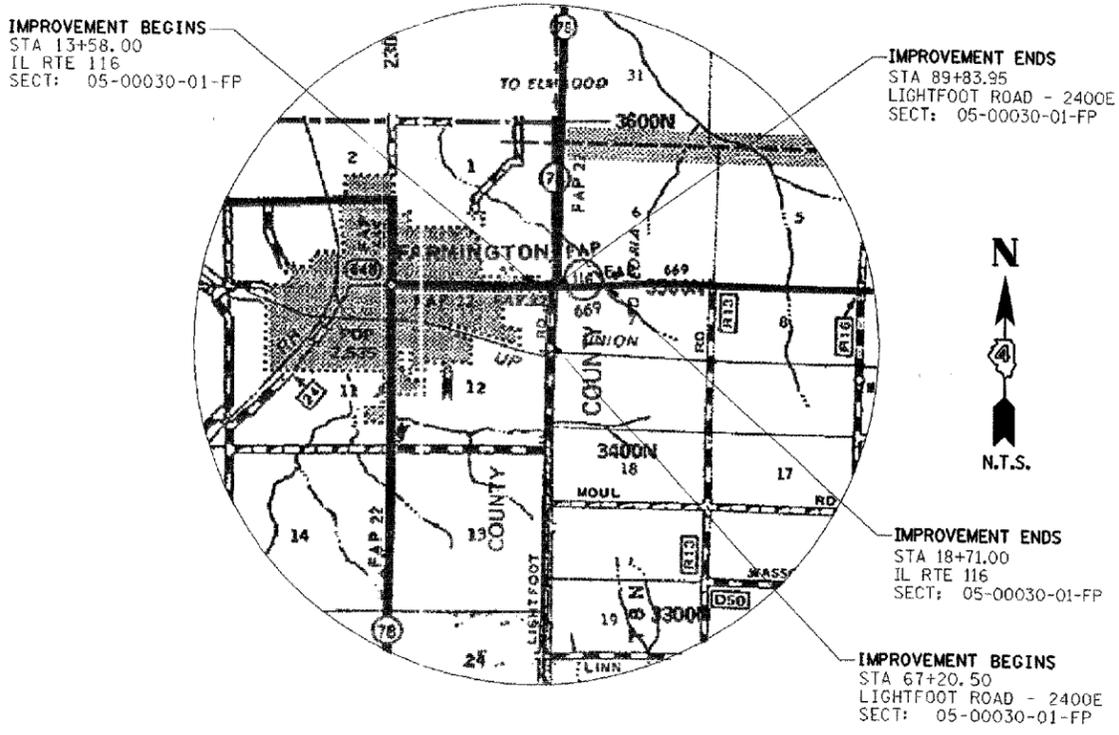

LOCATION MAP - CITY OF FARMINGTON (LIGHTFOOT ROAD - 2400E)

TOTAL LENGTH OF PROJECT = 2,776.45 FEET = 0.526 MILES
 NET LENGTH OF PROJECT = 2,776.45 FEET = 0.526 MILES

THE IMPROVEMENTS UNDER THIS CONTRACT ARE IN ACCORDANCE WITH THE ILLINOIS DEPARTMENT OF TRANSPORTATION "BUREAU OF LOCAL ROADS AND STREETS MANUAL, 2005 EDITION"

APPROVED	NOV 9 2006	2006
	<i>Cyril S. [Signature]</i>	
	CITY OF FARMINGTON	
PASSED	Nov 16	2006
	<i>Therese [Signature]</i>	
	DISTRICT FOUR ENGINEER OF LOCAL ROADS & STREETS	
Releasing For Bid Based on Limited Review	NOV 16	2006
	<i>[Signature]</i>	
	DEPUTY DIRECTOR OF HIGHWAYS, REGION THREE ENGINEER	
	ILLINOIS DEPARTMENT OF TRANSPORTATION	



Eric R. Bachman
 SIGNATURE
 11-09-06

EXPIRATION DATE NOV. 30, 2007

Farnsworth GROUP
 2706 McGraw Drive
 Bloomington, Illinois 61704
 309.863-6438 / Fax 309.863-1571

CONTRACT NO. 89395