


SUMMARY OF QUANTITIES

5000-2A


CODE NO.	ITEM	UNIT	TOTAL QUANTITY
20200100	EARTH EXCAVATION	CU YD	4,803
20800150	TRENCH BACKFILL	CU YD	440
21001000	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	SQ YD	1,330
25000100	SEEDING, CLASS 1	ACRE	1
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	90
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	90
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	90
25100630	EROSTON CONTROL BLANKET	SQ YD	2,950
28000400	PERIMETER EROSION BARRIER	FOOT	1,300
31100100	SUB-BASE GRANULAR MATERIAL, TYPE A	TON	4,735
31102800	SUB-BASE GRANULAR MATERIAL (SPECIAL)	TON	4,210
40201000	AGGREGATE FOR TEMPORARY ACCESS	TON	300
44000100	PAVEMENT REMOVAL	SQ YD	8,790
44000500	COMBINATION CURB AND GUTTER REMOVAL	FT	3,710
44003100	MEDIAN REMOVAL	SQ FT	18,460
44004250	PAVED SHOULDER REMOVAL	SQ YD	4,550
48101200	AGGREGATE SHOULDERS, TYPE B	TON	450
48203100	HOT-MIX ASPHALT SHOULDERS	TON	2,085
54213445	END SECTIONS 10"	EACH	10
60100060	CONCRETE HEADWALL FOR PIPE DRAINS	EACH	8
60100085	GEOTECHNICAL FABRIC FOR FRENCH DRAINS	SQ YD	435
60107700	PIPE UNDERDRAINS 6"	FOOT	3,930
60107900	PIPE UNDERDRAINS 10"	FOOT	535
60108200	PIPE UNDERDRAINS 6" (SPECIAL)	FOOT	240
60255500	MANHOLES TO BE ADJUSTED	EACH	2
60618300	CONCRETE MEDIAN SURFACE, 4 INCH	SQ FT	17,200
60624600	CORRUGATED MEDIAN	SQ FT	1,060
* 63000000	STEEL PLATE BEAM GUARD RAIL, TYPE A	FOOT	225
63200310	GUARDRAIL REMOVAL	FOOT	350
66700205	PERMANENT SURVEY MARKERS, TYPE 1	EACH	2
67100100	MOBILIZATION	L SUM	1
70103700	TRAFFIC CONTROL COMPLETE	L SUM	1
70106500	TEMPORARY BRIDGE TRAFFIC SIGNALS	EACH	8
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	1,290
* 70300210	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	95
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	6,350
70300280	TEMPORARY PAVEMENT MARKING - LINE 24"	FOOT	410
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	430
* 78001100	PAINT PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	100
* 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	5,175
* 78001140	PAINT PAVEMENT MARKING - LINE 8"	FOOT	530
* 78001180	PAINT PAVEMENT MARKING - LINE 24"	FOOT	120
78300100	PAVEMENT MARKING REMOVAL	SQ FT	2,230
Z0013798	CONSTRUCTION LAYOUT	L SUM	1
LR420033	PORTLAND CEMENT CONCRETE PAVEMENT 9" (SPECIAL)	SQ YD	8,850
* LR631020	TRAFFIC BARRIER TERMINAL, TYPE 1	EACH	2
X6064201	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.06	FOOT	3,710
XX006782	TEMPORARY HOT-MIX ASPHALT BASE COURSE, 8"	SQ YD	1,155

* SPECIALTY ITEMS

LEGEND
EXISTING

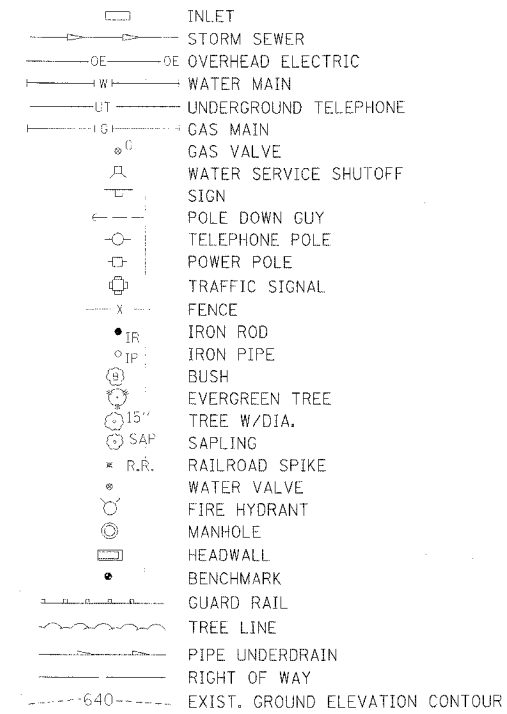

PROPOSED



McLEAN COUNTY, ILLINOIS MFT SECTION 05-00046-12-RP		
SUMMARY OF QUANTITIES & LEGEND		
DRAWN BY MAL DATE 12/06/06 CHECKED BY RGD	 2709 McGraw Drive Bloomington, Illinois 61704 309.582-8426 / fax 309.883-1671	FILE NO. 24-7687 BOOK NO. 2416 SHEET NO. 2 OF 32