

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
412 & 80	D3 WEED SPRAYING 2006-1	VARIOUS	5	1

INDEX OF SHEETS

1. COVER SHEET
2. GENERAL NOTES
3. SUMMARY OF QUANTITIES
4. SCHEDULES
5. SCHEDULES

STANDARDS

- 701101-01 OFF-ROAD OPERATIONS, MULTILANE, LESS THE 4.5 M (15') AWAY FOR SPEEDS ≥ 45 MPH
- 701106-01 OFF-ROAD OPR., MULTILANE, MORE THEN 4.5 M (15') AWAY FOR SPEEDS ≥ 45 MPH
- 701426-02 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS FOR SPEEDS ≥ 45 MPH
- 702001-05 TRAFFIC CONTROL DEVICES

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS



PROPOSED HIGHWAY PLANS

FAI ROUTE 412 (I-39) & FAI 80 (I-80)

SECTION D3 WEED SPRAYING 2006-1

LASALLE COUNTY

C-93-034-06

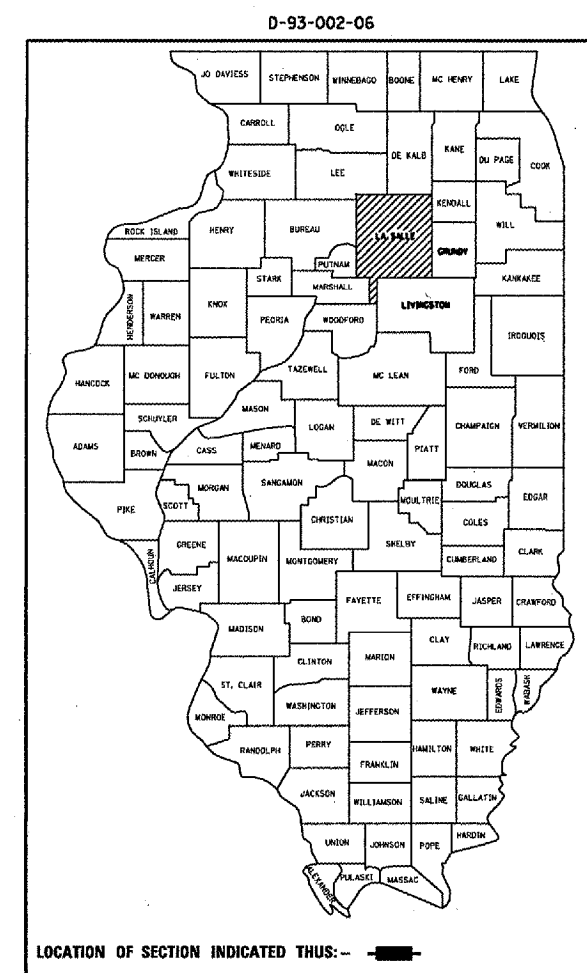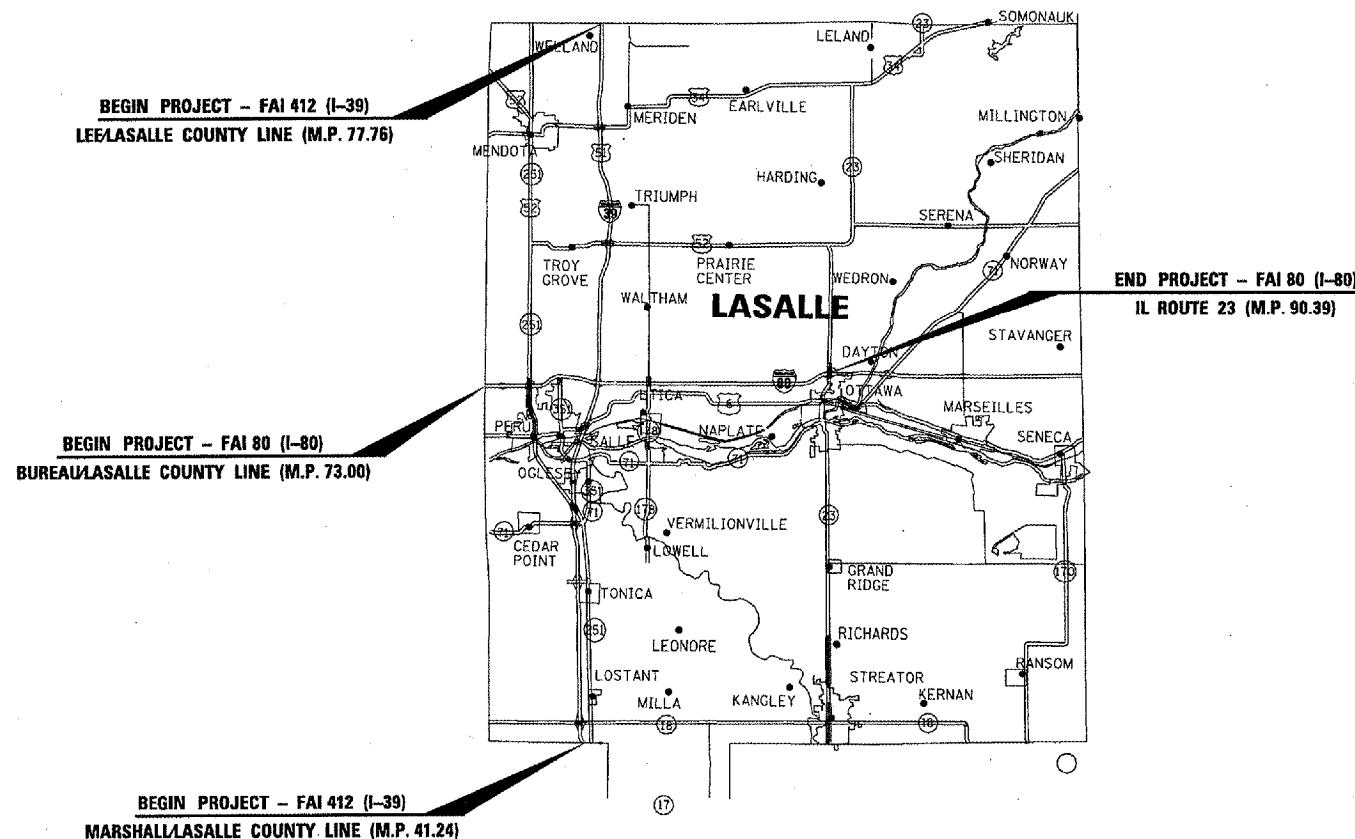

FUNCTIONAL CLASSIFICATION

RURAL: INTERSTATE

FAI ROUTE 412 (I-39)		
2003 ADT = 19180		
P.V = 65.0%	M.U. = 30.3%	S.U. = 4.7%
FAI ROUTE 80 (I-80)		
2003 ADT = 26100		
P.V = 63.7%	M.U. = 31.9%	S.U. = 4.3%

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED Dec 19 20 05

[Signature]
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

February 3, 20 06
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

February 3, 20 06
[Signature]
DIRECTOR, DIVISION OF HIGHWAYS

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

MICROFILMED _____
REEL NUMBER _____
AWARDED _____
RESIDENT ENGINEER _____
AS BUILT CHANGES WERE MADE
ON THE FOLLOWING SHEETS _____

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

DISTRICT NO. 3 815-434-6131

PROJECT ENGINEER: TOM HUFNAGEL 815-434-8418
UNIT CHIEF: BRIAN PYSZKA 815-434-8502
TOWNSHIP: VARIOUS

CONTRACT NO. 66629

LOCATION MAP

NOT TO SCALE

GROSS LENGTH: FAI 412 192826 FT. = 36.52 MI.
GROSS LENGTH: FAI 80 91819 FT. = 17.39 MI.
NET LENGTH: FAI 412 192826 FT. = 36.52 MI.
NET LENGTH: FAI 80 91819 FT. = 17.39 MI.

FILE NO: c:/projects/weedspray_062006-1/terails.dgn

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
412 & 80	D3 WEED SPRAYING 2006-1	VARIOUS	5	2

GENERAL NOTES:

Plan dimensions and details relative to the existing roadway and structure have been taken from existing plans and are subject to nominal construction variations. It shall be the contractor's responsibility to verify such dimensions and details in the field and to make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of the work, however, the contractor will be paid for the quantity actually furnished at the unit price bid for the work.

The contractor shall be responsible for protecting utility property from construction operations as outlined in Article 107.31 of the Standard Specifications. The "Julie" Number is 1-800-892-0123. A minimum of forty-eight (48) hours advance notice is required.

Where section or subsection monuments are encountered, the engineer shall be notified before such monuments are removed. The contractor shall protect and carefully preserve all monuments until an authorized surveyor or agent has witnessed or otherwise referenced their location. The contractor shall be responsible for having an authorized surveyor reestablish any section or subsection monuments destroyed by his operations.

Any reference to a standard in these plans shall be interpreted to mean the edition as indicated by the subnumber listed on the index of sheets or the copy of the standard included in these plans.

The following rates of application have been used in calculating plan quantities:

Overdrive	4	Onces/Acre
ESCORT XP	1	Onces/Acre
Improved Surfactant	1	Pint/Acre
Drift Control Additive	3.2	Ounces/Acre
Water	40	Gallon/Acre

DATE: _____

PREPARED BY: *Brian A. Buckner*
DISTRICT OPERATIONS ENGINEER

EXAMINED BY: *Shabir K. J.*
DISTRICT CONSTRUCTION ENGINEER

Paul Powell
DISTRICT STUDIES & PLANS ENGINEER

Kenneth L. Fry
DISTRICT MATERIALS ENGINEER

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

SCALE: VERT. _____
HORIZ. _____
DATE: 12/09/2005

DRAWN BY: RLW
CHECKED BY: _____

FILE NO: c:\projects\weedspray_062006-1\details.dgn

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
412 & 80	D3 WEED SPRAYING 2006-1	VARIOUS	5	3

SUMMARY OF QUANTITIES

CONSTRUCTION CODE TYPE: MAIN

100% STATE
LASALLE
COUNTY

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	100% STATE LASALLE COUNTY	
				URBAN	RURAL
67100100	MOBILIZATION	L SUM	1	0.20	0.80
K0012950	HERBICIDE SPRAYING	ACRE	600	127	473

FILE NO: c:\projects\weedspray_062006-1\details.dgn

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

SCALE: VERT. DRAWN BY: RLW
 HORIZ. CHECKED BY:
 DATE: 12/09/2005

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
412 & 80	D3 WEED SPRAYING 2006-1	VARIOUS	5	4

SCHEDULE FOR FAI 80 - LASALLE COUNTY

LOCATION	MILES	HERBICIDE SPRAYING	GENERAL NOTES	
		ACRE		
URBAN SECTION				
M.P. 73.00 TO M.P. 77.00	EB & WB LANES	4.00	29	NO MEDIAN
M.P. 79.30 TO M.P. 81.44	EB & WB LANES	2.14	16	NO MEDIAN
M.P. 88.26 TO M.P. 90.39	EB & WB LANES	2.13	16	NO MEDIAN
URBAN SUBTOTAL		8.27	61	
RURAL SECTION				
M.P. 77.00 TO M.P. 79.30	EB & WB LANES	2.30	17	NO MEDIAN
M.P. 81.44 TO M.P. 88.26	EB & WB LANES	6.82	50	NO MEDIAN
RURAL SUBTOTAL		9.12	67	
TOTALS		17.39	128	

FILE NO: c:\projects\weedspray_092006-1\details.dgn

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE FOR FAI 80 (I-80)

SCALE: VERT.
HORIZ.
DATE 12/09/2005

DRAWN BY RLW
CHECKED BY

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
412 & 80	D3 WEED SPRAYING 2006-1	VARIOUS	5	5

SCHEDULE FOR FAI 39 - LASALLE COUNTY

LOCATION	MILES	HERBICIDE SPRAYING	GENERAL NOTES
		ACRE	
URBAN SECTION			
M.P. 53.96 TO M.P. 58.70 U.S. ROUTE 6 FAU 6093 (OGLESBY SPUR)	NB & SB LANES 4.74	46 10 10	NO MEDIAN SPRAY ENTIRE INTERCHANGE SPRAY ENTIRE INTERCHANGE
URBAN SUBTOTAL	4.74	66	
RURAL SECTION			
M.P. 41.24 TO M.P. 53.96	NB & SB LANES 12.72	124	NO MEDIAN
M.P. 58.70 TO M.P. 77.76	NB & SB LANES 19.06	192	NO MEDIAN
U.S. ROUTE 34		20	SPRAY ENTIRE INTERCHANGE
U.S. ROUTE 52		20	SPRAY ENTIRE INTERCHANGE
IL ROUTE 71		20	SPRAY ENTIRE INTERCHANGE
IL ROUTE 251		10	SPRAY ENTIRE INTERCHANGE
CH 54 (TONICA)		10	SPRAY ENTIRE INTERCHANGE
IL ROUTE 18		10	SPRAY ENTIRE INTERCHANGE
RURAL SUBTOTAL	31.78	406	
TOTALS	36.52	472	

FILE NO: c:\projects\weedspray_062006-1\details.dgn

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE FOR FAI 412 (I-39)

SCALE: VERT.
HORIZ.
DATE 12/09/2005

DRAWN BY RLV
CHECKED BY