F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
337	19R-1	LAKE	800	20
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

60997

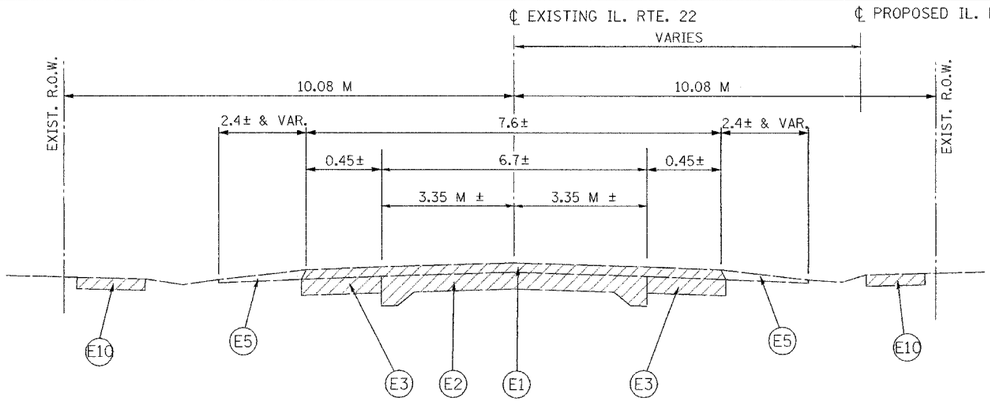

ILLINOIS ROUTE 22

E.J.&E. RAILROAD TO STA. 9+788.0

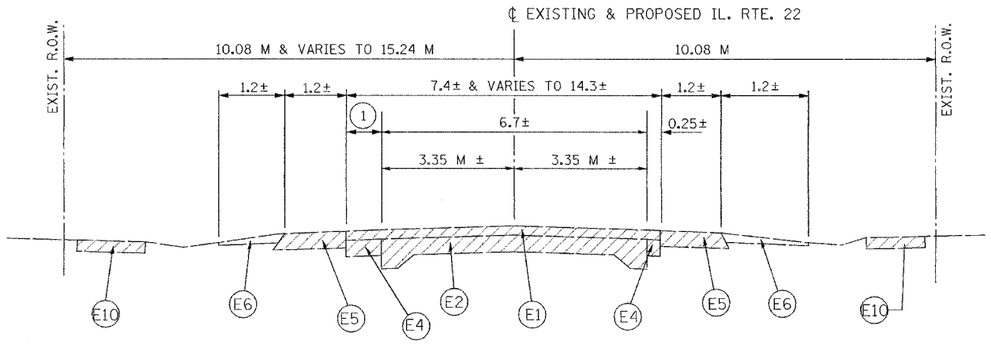

(1) VAR. 0.45 TO 2.85 (9+788 TO 9+924)

ILLINOIS ROUTE 22

STA. 9+788.0 TO STA. 9+924.0

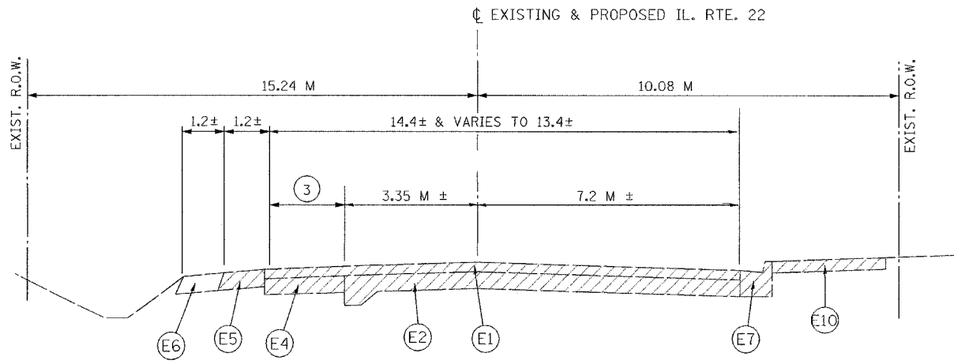

(3) VAR. 2.85 TO 3.85 (9+924 TO 9+961)
3.85 M (9+961 TO 10+028)

ILLINOIS ROUTE 22

STA. 9+924.0 TO STA. 10+028.0

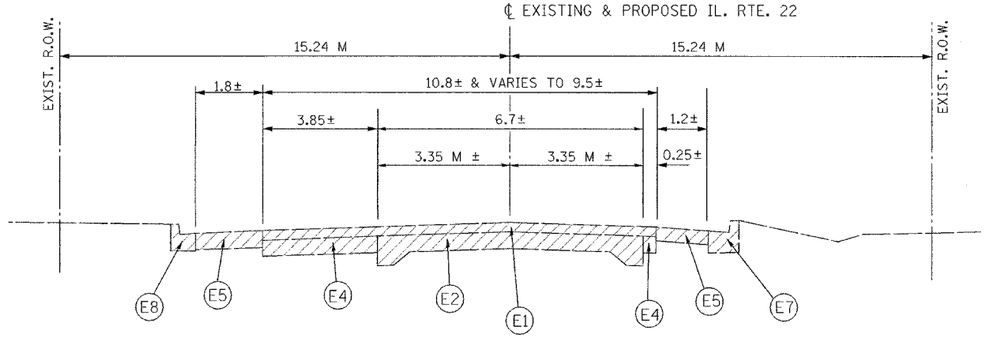

ILLINOIS ROUTE 22

STA. 10+028.0 TO STA. 10+078.0

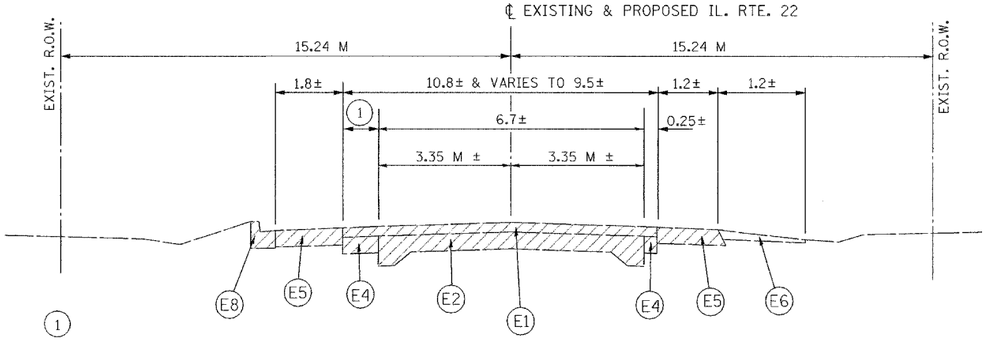

(1) 3.85 M (10+078 TO 10+144)
VAR. 3.85 TO 2.55 (10+144 TO 10+200)

ILLINOIS ROUTE 22

STA. 10+078.0 TO STA. 10+200.0

LEGEND:

- (E1) EXISTING BITUMINOUS CONCRETE OVERLAY 200 mm±
- (E2) EXISTING PCC PAVEMENT 225 mm±
- (E3) EXISTING BITUMINOUS BASE COURSE 150 mm±
- (E4) EXISTING PCC BASE COURSE 230 mm±
- (E5) EXISTING BITUMINOUS SHOULDER 200mm±
- (E6) EXISTING AGGREGATE SHOULDER
- (E7) EXISTING CONCRETE CURB & GUTTER B-15.30
- (E8) EXISTING CONCRETE CURB & GUTTER B-15.60
- (E9) EXISTING CONCRETE CURB TYPE B
- (E10) EXISTING P.C.C. SIDEWALK

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

ILLINOIS ROUTE 22
FROM US RTE 12 TO BUESCHING RD

ILLINOIS ROUTE 22
EXISTING TYPICAL SECTIONS

SCALE :
DESIGNED BY SOI
DATE : 07/21/04
CHECKED BY