FAP RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
752	(106-2Z)TS	FAYETTE		11
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT NO.		

CONTRACT NO. 94941

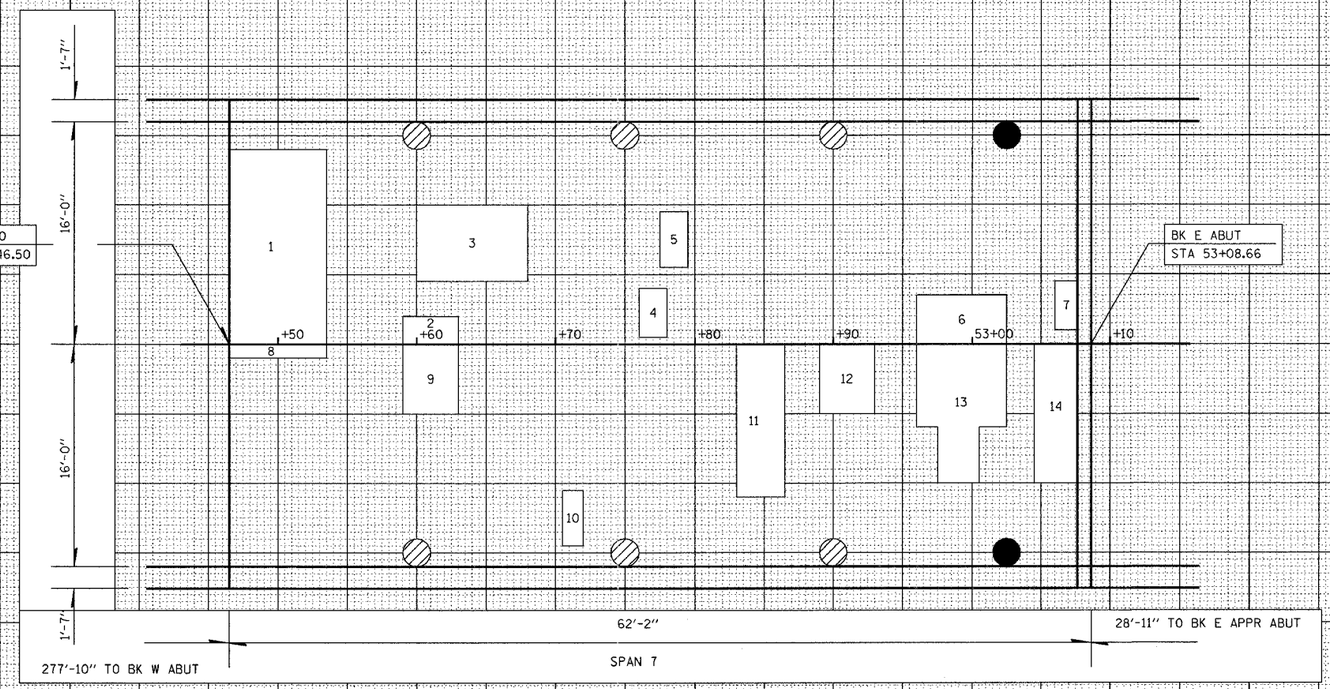



DECK SURFACE
(SPAN 7)

EXISTING DECK DRAINS

PLUG EXISTING DECK DRAINS

PATCH NO.	SIZE	DECK SLAB REPAIR (PART DEPTH) SQ FT	DECK SLAB REPAIR (FD TY 1) SQ FT	DECK SLAB REPAIR (FD TY 2) SQ FT
1	7.0 x 14.0			98.0
2	4.0 x 2.0			8.0
3	8.0 x 5.5			44.0
4	2.0 x 3.5	7.0		
5	2.0 x 4.0	8.0		
6	7.0 x 3.5			24.5
7	1.5 x 3.0	4.5		
8	7.0 x 1.0			7.0
9	4.0 x 5.0			20.0
10	1.5 x 4.0	6.0		
11	3.5 x 11.0	38.5		
12	4.0 x 5.0	20.0		
13	7.0 x 5.0			35.0
	3.0 x 4.0			12.0
14	3.0 x 10.0			30.0
	TOTALS	84.0		278.5

PATCH NO.	SIZE	DECK SLAB REPAIR (PART DEPTH) SQ FT	DECK SLAB REPAIR (FD TY 1) SQ FT	DECK SLAB REPAIR (FD TY 2) SQ FT
	PARTIAL DEPTH			
	Stage 1	19.5 = 2.2 SQ YD		
	Stage 2	64.5 = 7.2 SQ YD		
	Total	9.0 SQ YD		
	FULL DEPTH			
	Stage 1	174.5 = 19.4 SQ YD		
	Stage 2	104.0 = 11.6 SQ YD		
	Total	31.0 SQ YD		

PATCH NO.	SIZE	DECK SLAB REPAIR (PART DEPTH) SQ FT	DECK SLAB REPAIR (FD TY 1) SQ FT	DECK SLAB REPAIR (FD TY 2) SQ FT

PATCH NO.	SIZE	DECK SLAB REPAIR (PART DEPTH) SQ FT	DECK SLAB REPAIR (FD TY 1) SQ FT	DECK SLAB REPAIR (FD TY 2) SQ FT

PATCH NO.	SIZE	DECK SLAB REPAIR (PART DEPTH) SQ FT	DECK SLAB REPAIR (FD TY 1) SQ FT	DECK SLAB REPAIR (FD TY 2) SQ FT

DATE OF SURVEY: 03/04

NOTE: AREAS OF DECK REPAIRS SHOWN ARE ESTIMATED. THE ENGINEER SHALL SHOW ACTUAL LOCATIONS OF DECK REPAIRS ON AS-BUILT PLANS.

BRIDGE DECK PATCHING (SPAN 7 ONLY)

teasleyck "+" DATE
c:\projects\94941d\d0902pa.dgn