

Existing Condition: S.N. 099-0308 carrying I-80 Westbound over Frontage Road was originally constructed in 2005 as FAI Route 80 Section 99-1 (K, BY & AC-B). The structure consists of a reinforced concrete slab superstructure supported by reinforced concrete closed abutments. The skew is 7°55'17" front left.

Staged construction shall be utilized to maintain the traffic during construction.

INDEX OF SHEETS

1. General Plan, Notes & Bill of Material

BILL OF MATERIAL


ITEM	UNIT	SUPER	SUB	TOTAL
Concrete Sealer	Sq. Ft.	2,900	-	2,900

SCOPE OF WORK


1. Apply concrete sealer to bridge deck, top and inside faces of parapets, and approach slabs.

GENERAL NOTES


- Concrete Sealer shall be applied to the bridge deck and the inside vertical and the top horizontal faces of parapets, and approach slabs. All surfaces to be sealed should be thoroughly cleaned prior to sealer application. Cost of cleaning is included with the Concrete Sealer, see Special Provisions "Bridge Deck Concrete Sealer".
- Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting rehabilitation and make necessary approved adjustments prior to the application of Concrete Sealer. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.
- Dimensions & Data are taken from original contract plans, Dated October 2004.
- Existing pavement markings shall be temporarily covered prior to application of the deck surface treatment, to prevent the material from being applied to the markings. The temporary covering shall be removed after application of the deck treatment and prior to opening to traffic. Cost included with Concrete Sealer.

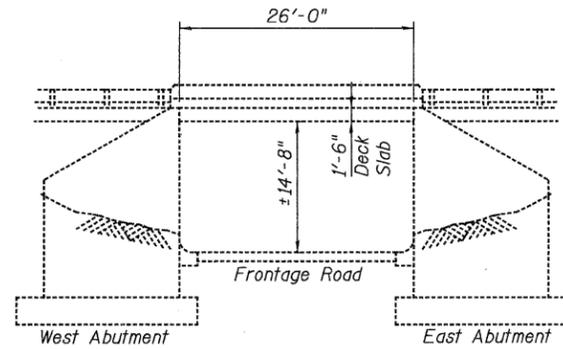

ELEVATION
LOOKING NORTH

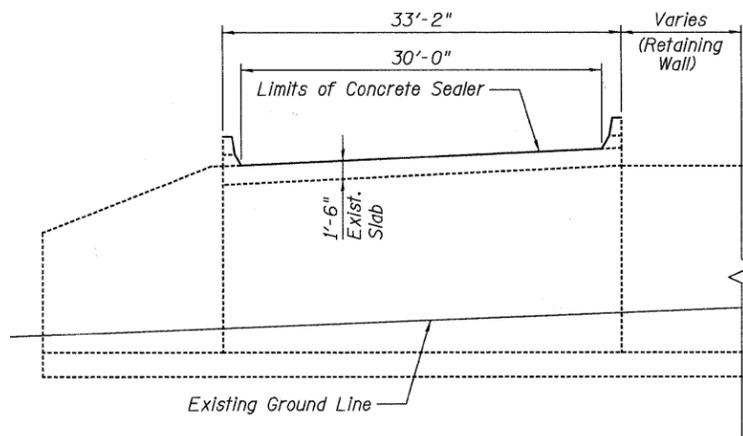


CROSS-SECTION

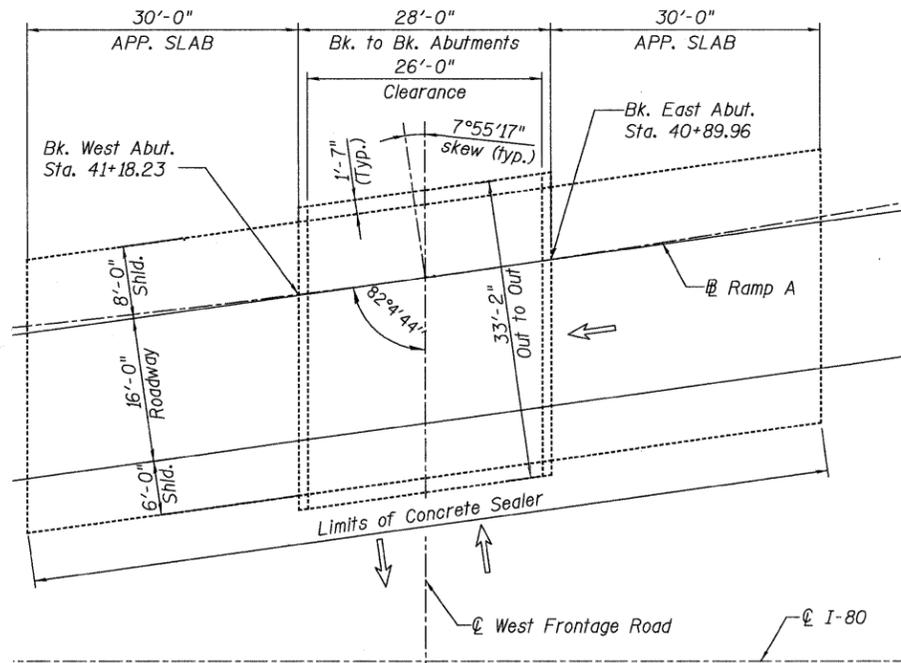

PLAN



Signed: *[Signature]*
Date: 01/18/2011
Exp: 11/30/2012
Sheets: 80

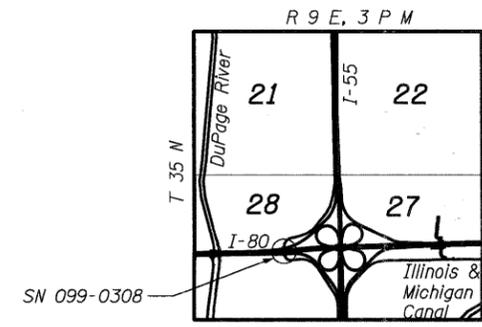

LOCATION SKETCH

DESIGNED - GMK	REVISED -	DB STERLIN CONSULTANTS, INC. 123 N. WALCKER DRIVE SUITE 2000 CHICAGO, ILLINOIS 60609 TEL: (312)851-1000 FAX: (312)851-1000	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION		GENERAL PLAN, NOTES & BILL OF MATERIAL SOUTHBOUND I-55 TO WESTBOUND I-80 RAMP OVER S.W. FRONTAGE RD. SN 099-0308		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
DRAWN - CMF	REVISED -						80	99 (3&4) RS-4	WILL	117	80		
CHECKED - WPK/MWS	REVISED -						SHEET NO. S-1 OF S-1 SHEETS					CONTRACT NO. 60M65	
DATE - 01/18/2011	REVISED -						FED. ROAD DIST. NO. 1 (ILLINOIS) FED. AID PROJECT						