

DROP BOX NO. 1

LT STA. 131 + 09.50

BILL OF MATERIALS (FOR INFORMATION ONLY)

BAR	SIZE	NO.	LENGTH	SHAPE
a	#4	24	5'-1"	—
f	#4	6	2'-0"	—
h	#6	1	5'-1"	—
h ₁	#4	16	5'-1"	—
u	#6	4	13'-0"	—
v	#4	2	4'-7"	—
v ₁	#5	14	6'-1"	—
z	#4	4	3'-6"	—
DESCRIPTION			UNIT	QTY
CLASS "SI" CONCRETE			CU YD	2.4
REINFORCEMENT BARS			LB	334

BILL OF MATERIALS (FOR INFORMATION ONLY)

DESCRIPTION	UNIT	QTY.
3" GALVANIZED STEEL PIPE	FOOT	2 @ 4'-8"
1/2" x 4" x 14" GALV. STEEL PLATE	EACH	4
5/8" x 9" GALV. STEEL BOLTS	EACH	1
EXPANSION BOLTS 1/2"Ø	EACH	8

GENERAL NOTES:

THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER "EACH" FOR DROP BOX NO. 1. THIS WORK SHALL INCLUDE THE GALVANIZED PIPE & STEEL PLATES, CLASS SI CONCRETE, REINFORCEMENT BARS, BOLTS, NUTS, WASHERS, INSTALLATION ON THE PROPOSED CULVERT, PIPE GRATING, EARTH EXCAVATION AND DIVERTING WATER WHERE REQUIRED, AND ANY NECESSARY GRADING TO FIT THE DROP BOX, AS SHOWN IN THE CROSS SECTIONS OR TO SLOPE.

CLASS SI CONCRETE SHALL BE USED THROUGHOUT. EXPOSED EDGES SHALL BE BEVELED 3/4".

SLOPE FLOW LINE FOR DROP BOX NO. 1 IS THE SAME RATE AS THE FLOW LINE OF THE PIPE.

BOLTS, NUTS, AND WASHERS SHALL BE IN ACCORDANCE WITH ARTICLE 1006.08 OF THE STANDARD SPECIFICATION AND SHALL BE GALVANIZED.

STEEL PIPES SHALL CONFORM TO ASTM A-53 (TYPE E OR S) GRADE B, SCHEDULE 40, AND SHALL BE GALVANIZED CONFORMING TO ASTM A-120. CONTRACTOR SHALL FIELD VERIFY PIPE LENGTH.

STEEL PLATES SHALL CONFORM TO AASHTO M-183 AND SHALL BE GALVANIZED CONFORMING TO AASHTO M-111.




REINFORCEMENT BARS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A706 GR. 60 (IL MODIFIED).

THE CONTRACTOR SHALL BE RESPONSIBLE FOR DIVERTING THE WATER FLOW FROM THE CONSTRUCTION AREA USING A METHOD MEETING THE APPROVAL OF THE ENGINEER. THIS WORK SHALL BE IN ACCORDANCE WITH ARTICLE 503 OF THE STANDARD SPECIFICATIONS. COST INCLUDED WITH "DROP BOX NO. 1."


SEE PLAN AND PROFILE SHEET FOR MORE INFORMATION.

SEE CROSS SECTION SHEET FOR MORE INFORMATION.


36" INSERTION CULVERT (RPM - D3262) LINER SHALL BE FURNISHED AND INSTALLED IN ACCORDANCE WITH SECTION 543.

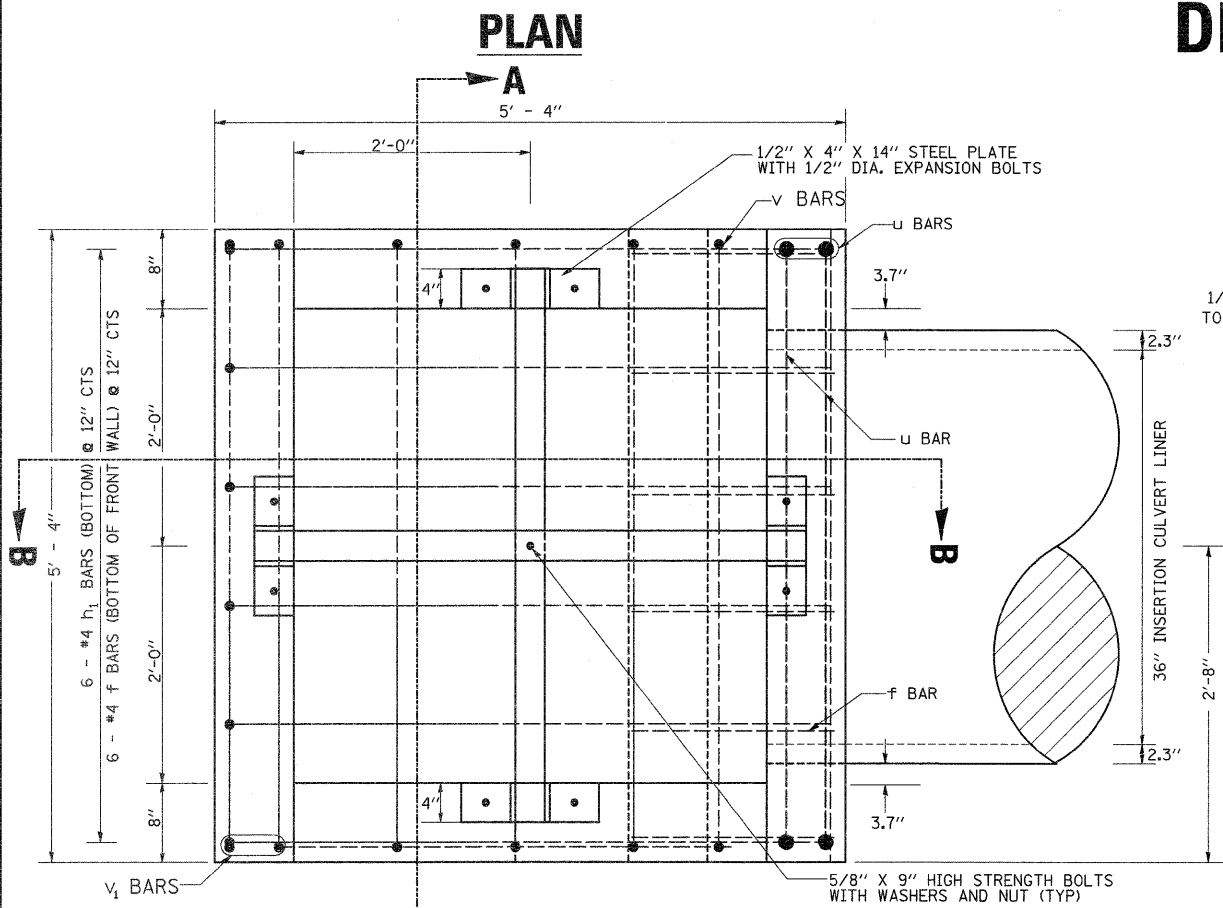


#5 v₁ BARS




#6 u BAR



#4 f BAR



SECTION B-B

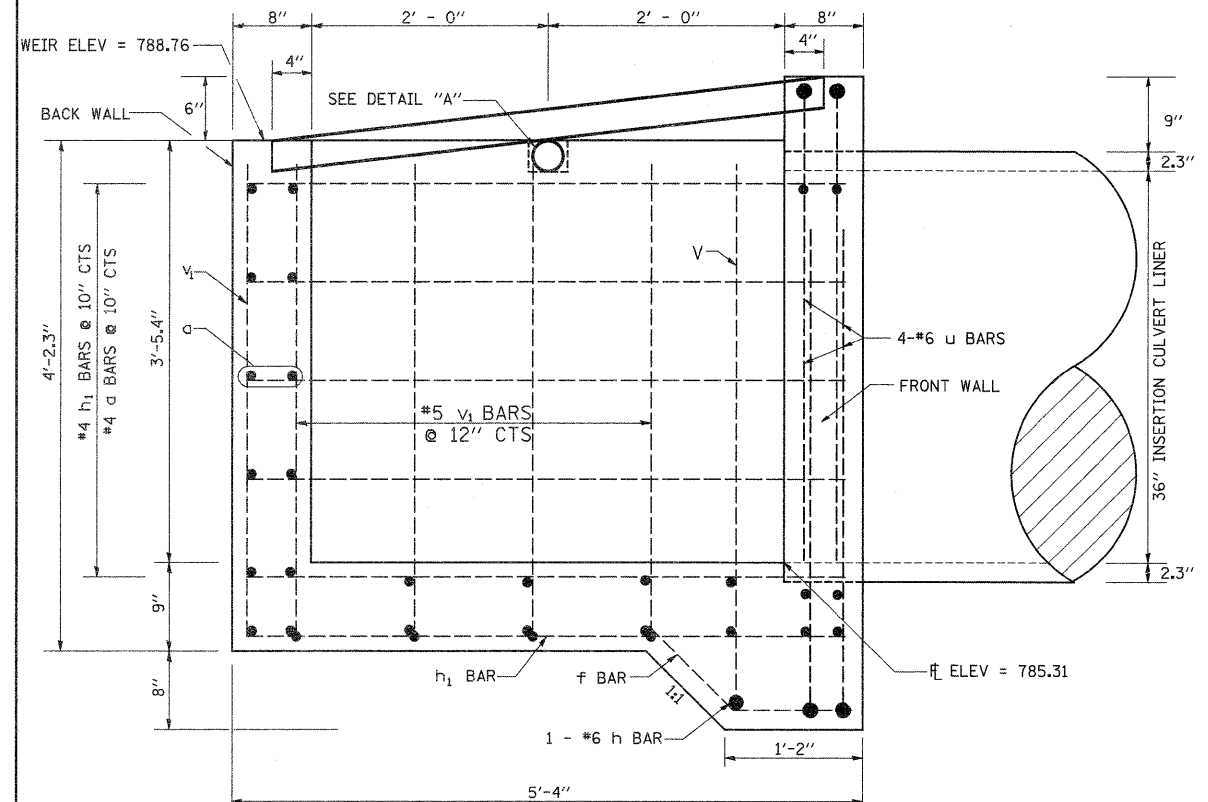

SECTION A-A

