


CENTERLINE RUMBLE STRIP			
LOCATION			FOOT
STA	TO	STA	
456+53	TO	472+44	1591
470+43	TO	473+26	283
473+42	TO	509+08	3566
476+30	TO	478+82	252
488+08	TO	492+53	445
494+77	TO	497+82	305
TOTAL:			6442


PAVEMENT MARKING SCHEDULE								
LOCATION			TEMPORARY PAVEMENT MARKING SOLID LINE, 4"	URETHANE PAVEMENT MARKING SOLID LINE, 4"	PAVEMENT MARKING REMOVAL	SHORT-TERM PAVEMENT MARKING	WORKZONE PAVEMENT MARKING REMOVAL	
			(YELLOW)	(YELLOW)		(YELLOW)		
STA	TO	STA	FOOT	FOOT	SQ FT	FOOT	SQ FT	
456+53	TO	472+44	3182	3182	1061	289	96	
470+43	TO	473+26	566	566	189	51	17	
473+42	TO	509+08	7132	7132	2377	648	216	
476+30	TO	478+82	504	504	168	46	15	
488+08	TO	492+53	890	890	297	81	27	
494+77	TO	497+82	610	610	203	55	18	
TOTAL:			12884	12884	4295	1171	390	

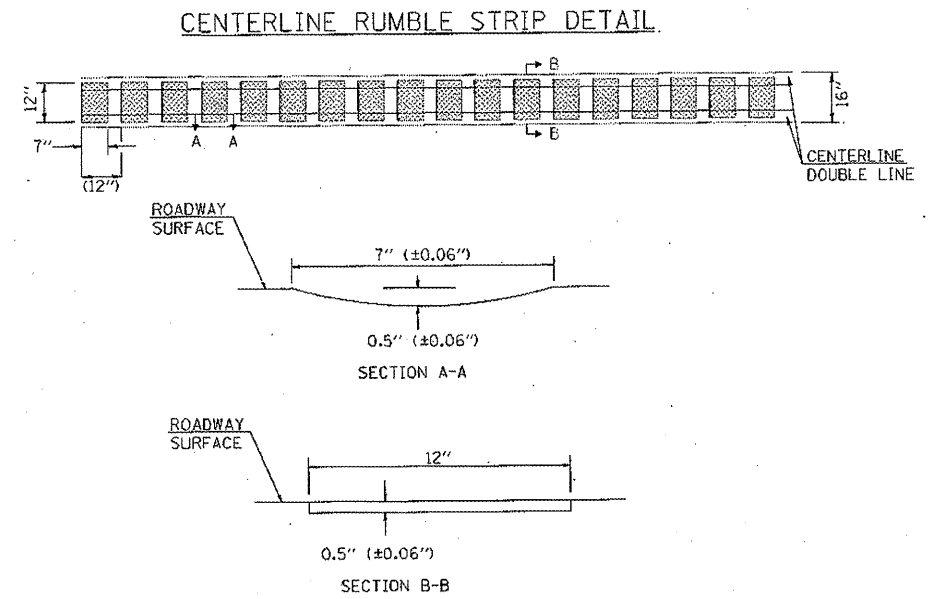

NOTE: THE PROPOSED CENTERLINE PAVEMENT MARKINGS SHALL BE PLACED AFTER THE CONSTRUCTION OF THE RUMBLE STRIP.

SHOULDER RUMBLE STRIPS			
LOCATION			FOOT
STA	TO	STA	
RIGHT			
457+40	TO	459+40	200
460+25	TO	469+00	875
470+30	TO	472+34	204
473+70	TO	476+28	258
477+24	TO	487+32	1008
502+07	TO	509+08	701
LEFT			
459+84	TO	463+04	320
465+05	TO	492+02	2697
492+88	TO	493+60	72
495+07	TO	497+22	215
497+70	TO	505+37	767
507+04	TO	509+08	204
TOTAL:			7521

SHOULDERS					
LOCATION			HMA SHOULDERS, 6"	AGGREGATE SHOULDERS, TYPE B	PAVED SHOULDER REMOVAL
STA	TO	STA	(SQ YD)	(TON)	(SQ YD)
RIGHT					
456+71	TO	472+34	695		695
473+70	TO	487+32	605		605
487+32	TO	496+45		213	
502+07	TO	509+08	312		312
LEFT					
456+71	TO	488+00	1391		1391
498+53	TO	509+08	469		469
TOTAL:			3471	213	3471

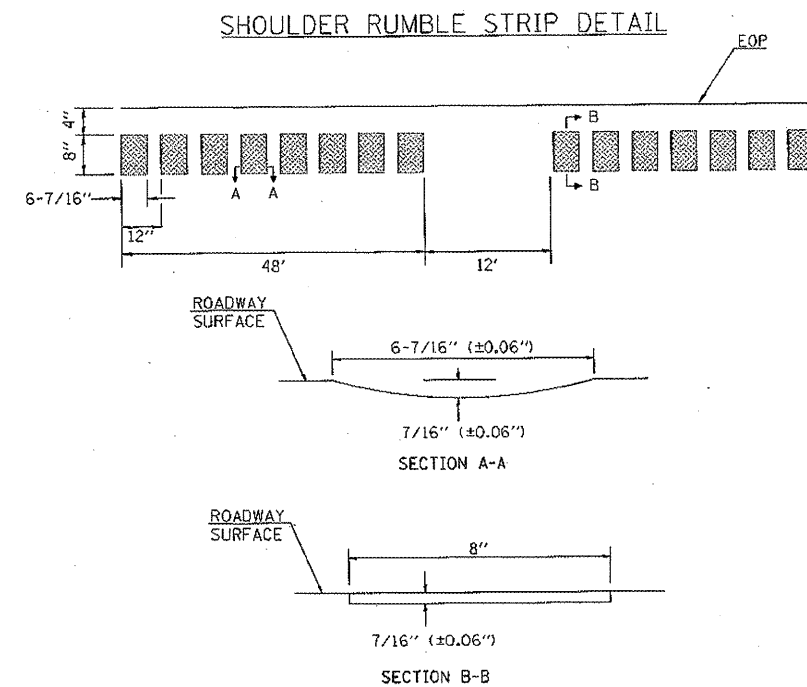

NOTE: THE RUMBLE STRIP PATTERN WILL BE 48' WITH A 12' GAP

CONCRETE GUTTER					
LOCATION			CONCRETE GUTTER TYPE A	CLASS SI CONCRETE (OUTLET)	GUTTER REMOVAL
STA	TO	STA	(FOOT)	(CU YD)	(FOOT)
RIGHT					
482+85	TO	487+32			447
LEFT					
465+05	TO	480+16	1511	10	1511
TOTAL:			1511	10	1958

REVISIONS SHEET 2-23-11

FILE NAME =	USER NAME = burnsidee	DESIGNED -	REVISED -
c:\pe_work\pudat\burnsidee\d2207481\7635-ah-plot.dgn	7635-ah-plot.dgn	DRAWN -	REVISED -
PLOT SCALE = 41.2487' / IN.		CHECKED -	REVISED -
PLOT DATE = 2/14/2011		DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES & DETAILS

F.A.I.L. RTE. 9122	SECTION 302-F-3	COUNTY MADISON	TOTAL SHEETS 10	SHEET NO. 5
CONTRACT NO. 7635			FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT	

SCALE: SHEET NO. OF SHEETS STA. TO STA.